

| DO NOT SCALE THE DRG. | ASK IF IN DOUBT |

HYD CYL -Ø40X35X510
(NIHVA TECHNOLOGIES PVT LTD)

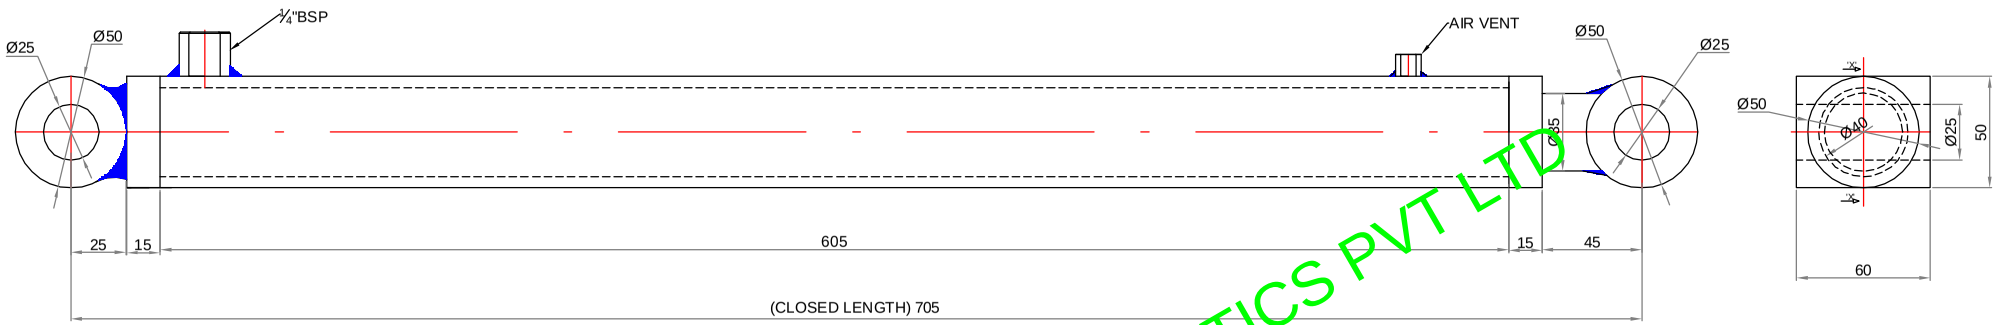

SECTION 'X'X'

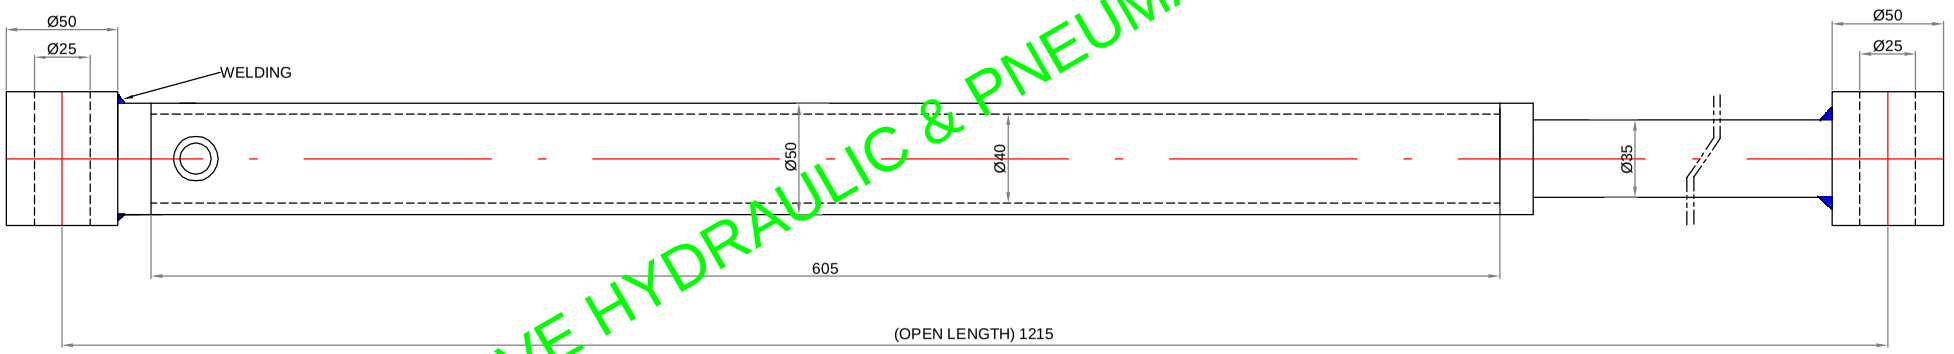

ACHIEVE HYDRAULIC & PNEUMATICS PVT LTD

SPECIFICATION :-

*BORE :- Ø40 mm.
*STROKE :- 510 mm.
*PISTON ROD :- Ø35mm.
*MOUNTING :-BOTH END CLEVIS
*MEDIUM :- HYDRAULIC OIL.
*DESIGN :- WELDED TYPE. (SINGLE ACTING)
*BOTH END PORT CONNECTION:- 1/4" BSP.
*WORKING PRESSURE :- 160 BAR.
*OPERATING TEMPERATURE:-20 'C TO 100'C (DEPENDING ON SEAL)
*MAX RECIPROCATING SPEED :-12m/min
*STROKE TOLERANCE:- 0 TO ±1mm
* CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

GENERAL TOLERANCES

DIMN	FABRICATION	MACHINING
0–10	±0.5	±0.1
11–50	±0.5	±0.2
51–100	±1.5	±0.3
101–500	±2.0	±0.5

DIMN	FABRICATION	MACHINING
501–1000	±3.0	±0.8
1001–3000	±4.0	±1.2
ABOVE 3000	±6.0	±2.0

NOTE
THIS DRAWING IS THE PROPERTY OF ACHIEVE HYDRAULIC & PNEUMATIC PUNE AND SHOULD NOT BE USED DIRECTLY OR INDIRECTLY OR PARTS THERE OF WITHOUT EXPRESS PERMISSION FROM ACHIEVE HYDRAULIC AND PNEUMATIC, PUNE

NO.	DESCRIPTION/SIZE	QTY.	MATERIAL	WT./PC.	DRG./CODE NO.

ALL DIMNS. ARE IN MM

THIS DRAWING IS THE PROPERTY OF ACHIEVE HYDRAULIC&PNEUMATIC PUNE AND SHOULD NOT BE COPIED OR USED WITHOUT THEIR WRITTEN CONSENT

ACHIEVE HYDRAULICS & PNEUMATICS PVT LTD.
Chikhali PUNE-412114.

2016	DRN.	CHD.	APPD.	SCALE
SIGN.	NAG	SAS	R.P.S	NTS
DATE	19.10.16			

UNSPECIFIED TOLERANCES

ABOVE.	30	120	315	1000	2000	4000
UPTO	120	315	1000	2000	4000	8000
TOL.	±0.3	±0.5	±0.8	±01.2	±2	±3

O.A.NO.	CUST.	M/C NO.	PART NO.
	NIHVA		

TITLE:-
HYD CYLINDER

COMP.FILE NO.– STD

DRG.NO. .

NO.	CHANGE OF RECORD	SIGN.	DATE

FILE NAME– NAGENDRA.

SHEET SIZE – A3