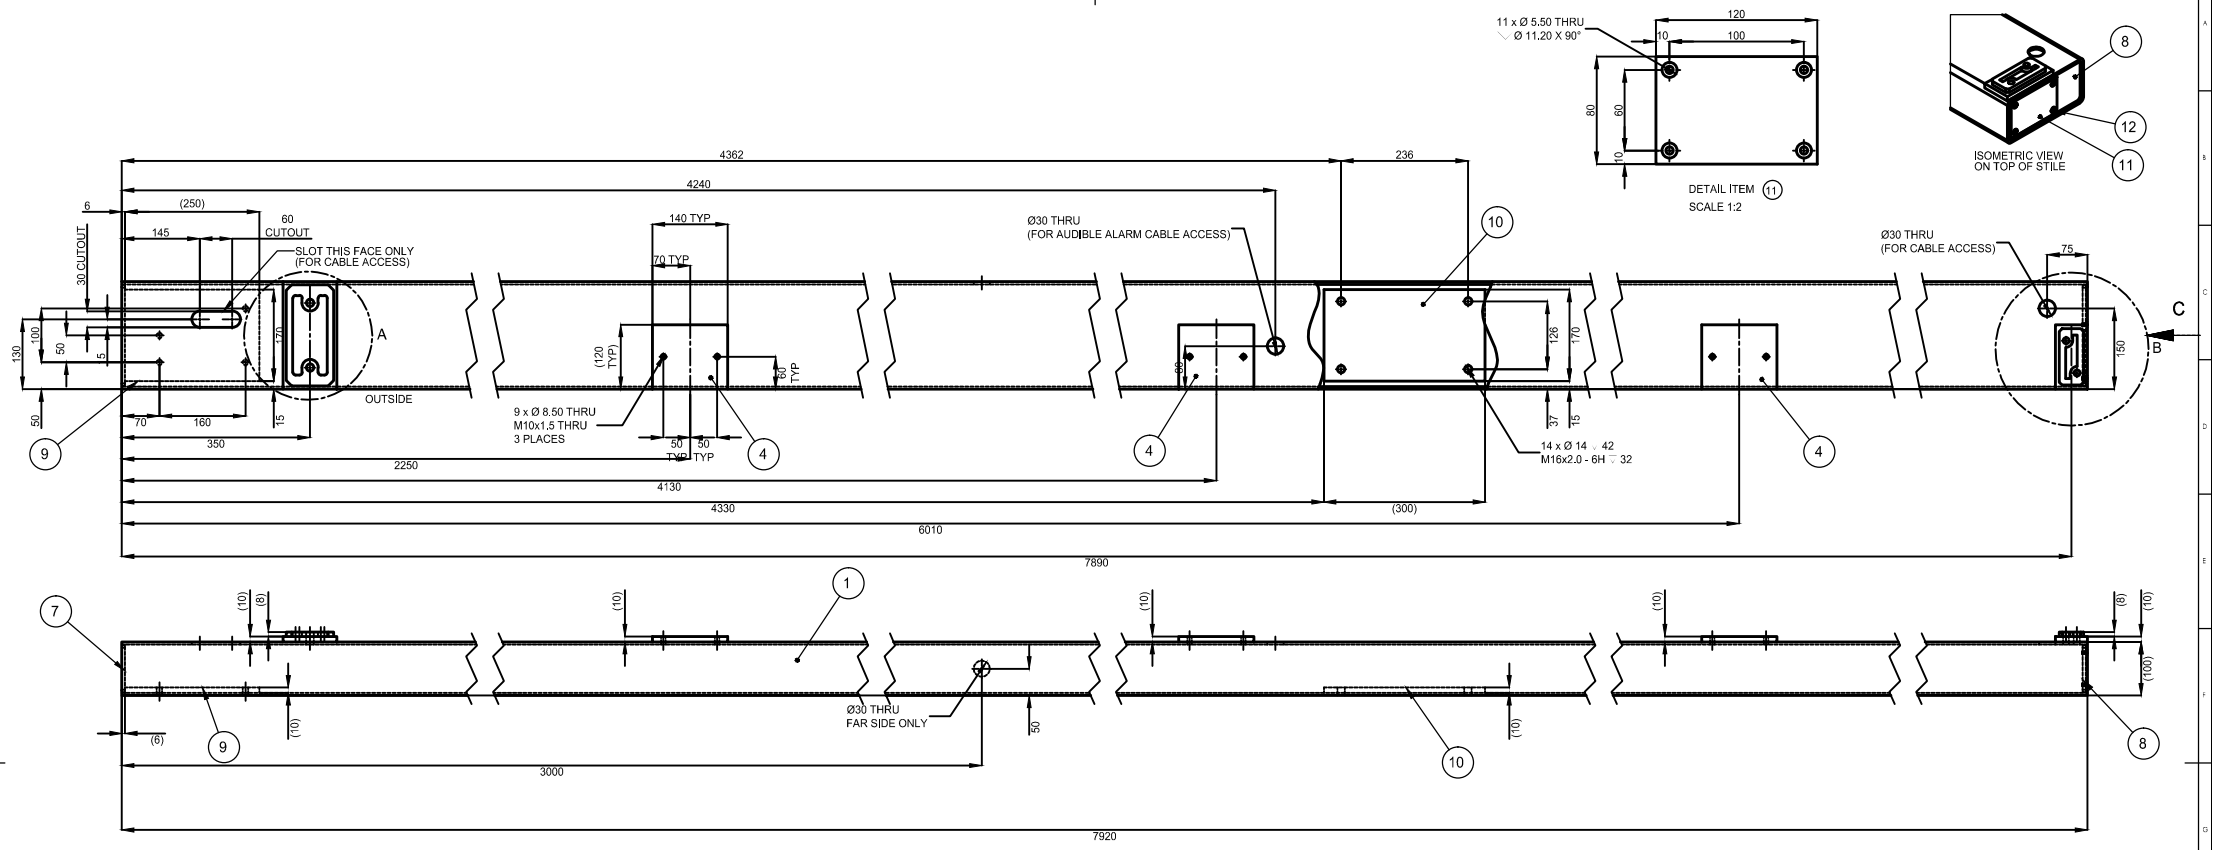


QUANTITY: P4-SD3-S2 - 8-OFF REQD - AS DRAWN
P4-SD3-S2x - 8-OFF REQD - OPP HAND

FINISH:

PRIOR TO FABRICATION


1. SHOTBLAST TO S.A. 2.5
2. APPLY 25u DFT K232 ZINC RICH EPOXY PRE-FAB PRIMER


AFTER FABRICATION


3. APPLY 75u DFT EPOXY ZINC RICH EPOXY PRIMER ("HEMPADUR ZINC 15360" BY HEMPEL)
4. APPLY 200u DFT TWIN PACK, HIGH BUILD EPOXY MIO COATING. ("HEMPADUR MASTIC 45881" BY HEMPEL)
5. APPLY 50u DFT TWIN PACK, ACRYLIC POLYURETHANE GLOSS COAT. ("HEMPATHANE 55210" BY HEMPEL) COLOUR - DENIM, RAL 5014.

SCALE 1:5 U.S.O.

ALL WELDS TO BE 6mm FILLET OR
FULL STRENGTH BUTT WELDS UNLESS STATED OTHERWISE

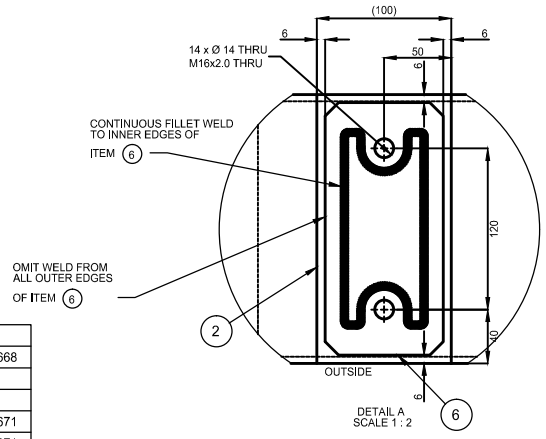

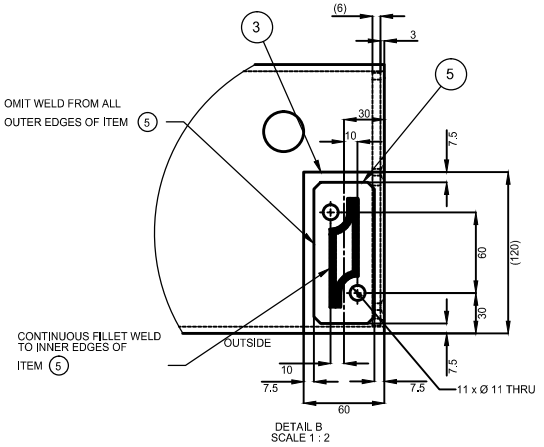

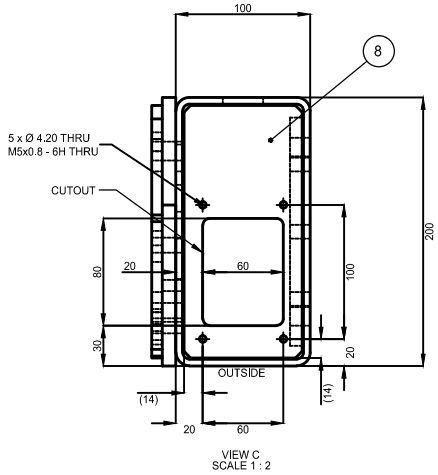

ITEM	MATERIAL	LENGTH	QTY	TOTAL QTY	PART #
12	M5x10 CSK HEAD SKT SCREW - BZP		4	64	
11	3mm GALV FLAT - CUT FROM SCRAP (120x80)		1	16	#668
10	FLAT 300x10	170	1	16	
9	FLAT 250x10	170	1	16	
8	6mm PROFILE PLATE - C6627-PR511		1	16	#671
7	6mm PROFILE PLATE - C6627-PR510		1	16	#671
6	8mm PROFILE PLATE - C6627-PR504		1	16	#672
5	8mm PROFILE PLATE - C6627-PR502		1	16	#672
4	FLAT 120x10	140	3	48	
3	FLAT 120x10	60	1	16	
2	FLAT 100x10	200	1	16	#355
1	RHS 200x100x5 GrS355J2H-EN10210	7920	1	16	

DRAWING NUMBER C6627-540

GENERAL NOTES
1. ALL STEELWORK TO CONFORM TO BS EN 10025:2004
2. ALL WELDING TO CONFORM TO AWSD1.1/D1.1M 2006
3. ALL STEELWORK TO BE MIN GRADE S275JR UNLESS OTHERWISE STATED
4. TOLERANCE :- ±0.25 & ±0°30'
5. ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED

TOTAL WEIGHT (kG) 190.39

INSPECTION CATEGORY	
DIMENSION	D
WELDING	D
FITTING	-
FINISH	D

DRAWN	CRA
DATE	