



" U " TYPE GUIDE

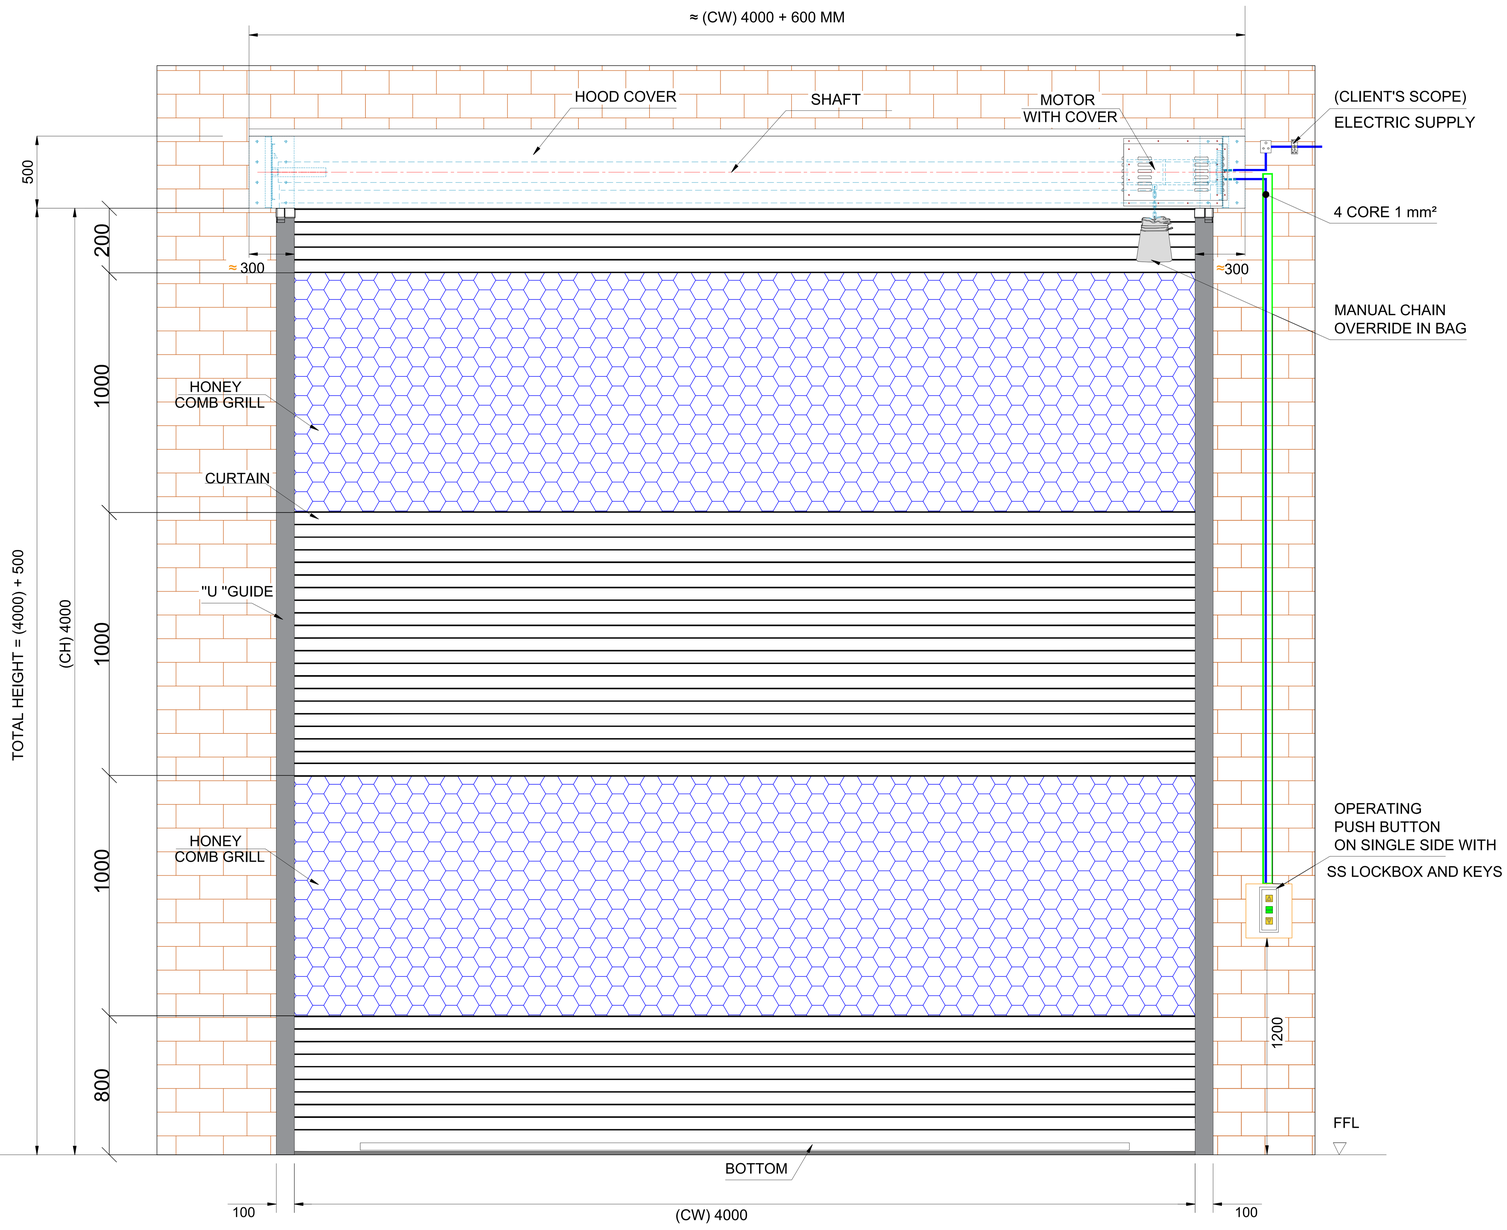

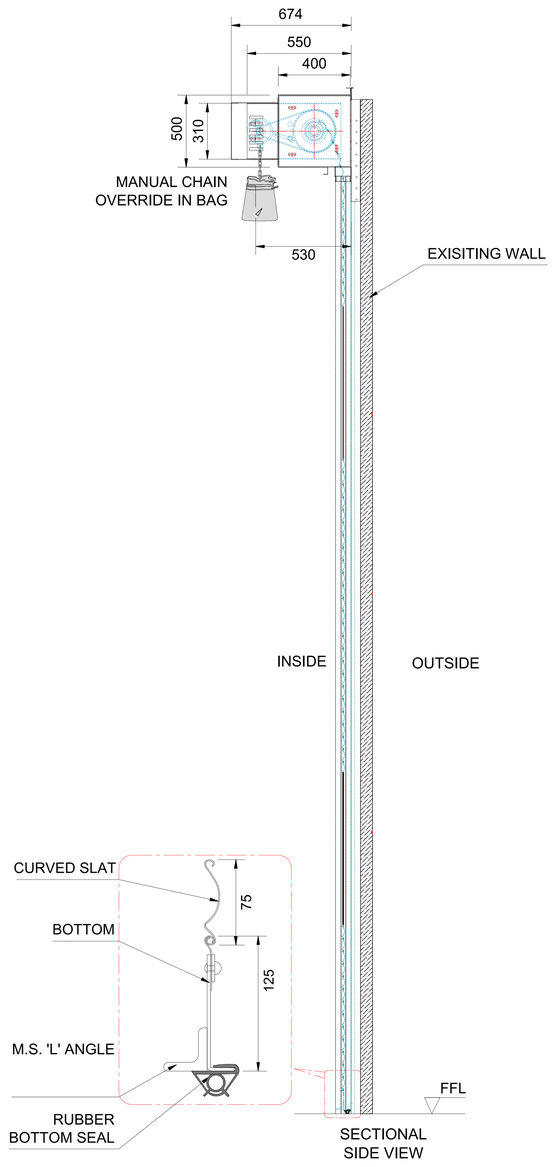

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside/Outside
3.	Mounting Surface	Side Brackets: Existing Wall/Structure
4.	Slat	Curved 75 mm GI Sheet - 1.0 mm Thk
5.	Grill	Honey comb grill 1000 mm Height
6.	Bottom Profile	MS Plate 125 x 2.5 mm thick with Angle Stiffner with rubber seal
7.	Guide Profile	M.S." U " Shape profile 100 x 2.5 mm Thk.
8.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
9.	Accessories	Push Button Single side

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose
3. RAL code confirm by client

SHUTTER SIZES :-

SR.	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY.
01	4000 mm	4000 mm	01

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	S.J.	20/10/2024
CHECK	V.N.	20/10/2024
APPROVAL	V.T.	20/10/2024

CLIENT - TATA MOTORS
LOCATION - PIMPRI
PROJECT - MOTORISED ROLLING SHUTTER
DWG. NO. : NIHVA/24-25/TP/24100001 REV-00
SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm
If any queries contact : design@nihva.com