# Sliding Door Operator
# Besam SL500

ASSA ABLOY

## ASSA ABLOY Entrance Systems

The global leader in
door opening solutions



ASSA ABLOY ENTRANCE SYSTEMS
Automatically green

## The modular Besam SL500 enables upgrades and add-ons when you want to move your business forward

**Sustainable Entrances**
With additional sealing (Besam TightSeal), sustainable drive mode, intelligent opening width depending on traffic, inner- and outer door air locking, and timer settings - be assured that your entrance suits your people flow as well as your environmental footprint.


**Safety First**
To permit safe passage between closing doors, the doors reverse if an obstruction is detected then resume their interrupted movement at low speed to check if it has disappeared. If an obstruction is detected between opening doors and surrounding walls or interior fittings, the door immediately stops and then closes after a time delay. The door's speed and force can be customized to optimize safety. For optimally safe operation and convenience of your people flow, use a monitored Besam presence detection system.


### Technical specifications

| | |
|---|---|
| Power supply | 100 V AC -10% to 240 V AC +10%; 50/60 Hz |
| Power consumption | max. 250 W |
| Besam SL500-2 without break-out<br>Besam SL500-2 with break-out<br>Besam SL500-R/L without break-out<br>Besam SL500-R/L with break-out | 200 kg/door leaf<br>100 kg/door leaf<br>240 kg<br>100 kg |
| Clear opening width (COW)<br>Besam SL500-2<br>Besam SL500-R/L | <br>900 – 3000 mm<br>900 – 3000 mm |
| Hold open time | 0 – 60 s |
| Ambient temperature | -20°C to +50° |
| Relative humidity (non-condensing) | Max. 85% |


**Security and Monitoring**
Choose your security level by adding different features  Unwanted guests are not an issue for the Besam SL500 as its locking devices and operation mode selector can be tailored to meet your security needs during opening as well as business closing hours. Inter air locking facilities.

Ensure you are one step ahead of break-downs via maintenance indicators and automated diagnostics, or let us take care of your maintenance via ASSA ABLOY Entrance Systems tailored Maintenance programs.

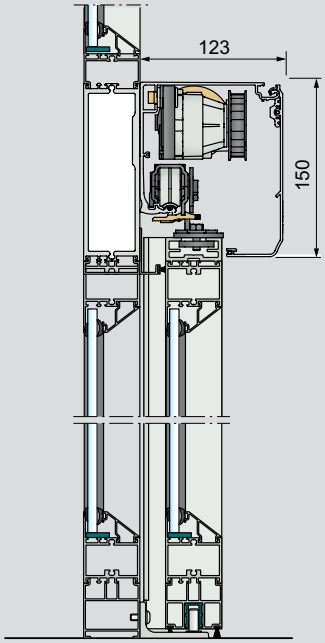


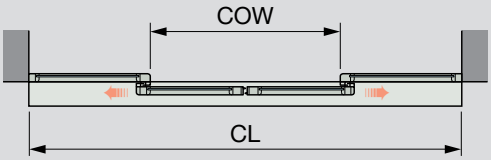
Bi-parting

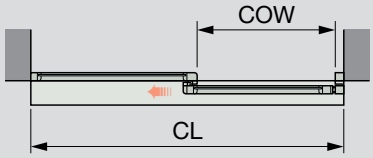


Left opening

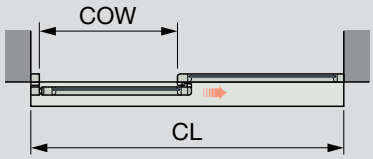


Right opening

COW = Clear opening width
CL = Cover length

**Appealing Aesthetics**
The Besam SL500 further improves the aesthetics of your automated entrance system. With the operator's sleek design, state-of-the-art operation mode selectors, minimum amount of operational parts as well as smooth and quiet operation - the Besam SL500 ensures both convenience and appeal to pedestrians.

**Models**
**Besam SL500-2** - 2 leaves, bi-parting, with or without break-out
**Besam SL500-R/L** - 1 leaf, single-slide, right or left opening, with or without break-out

## Standard equipment

| |
|---|
| Cover Support beam with transmission |
| Electronic control unit with plug-in connections and power supply |

## Accessories and Options

| |
|---|
| Cover:<br>Clear anodized aluminium (other anodizing optional)<br>Paint finished in colour RAL 9010 (other RAL paint finishes optional) |
| Door adaptor for doors up to 65 mm thickness made by others |
| Traffic-controlled opening width |
| Synchronizing of two operators |
| Operation mode selectors |
| Electronic emergency opening or closing unit |
| Break-out unit |
| Emergency button |
| Besam motion and presence sensors |
| Electrical locking devices |
| Interlocking between two operators |
| Key switch |
| Besam Automatic Door systems |

This equipment should be installed, regularly inspected, maintained and serviced by trained and authorized personnel. Preventive maintenance plans are highly recommended for a proper and safe operation. Talk to your ASSA ABLOY Entrance Systems representative to learn more about our service offering!

ASSA ABLOY Entrance Systems
Tel: +46 (0)10 4747 000
sales.aaes@assaabloy.com
assaabloyentrance.com

ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logotypes, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

©All rights in and to this material are the sole property of ASSA ABLOY Entrance Systems AB. Copying, scanning, alterations or modifications are expressly forbidden without the prior written consent of the applicable company within ASSA ABLOY Entrance Systems AB.
1009198-EI-4.0 – Issue 2014-06-18 – Rights reserved for changes without prior notice.