NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

Project Name: CN IFFCO Ludhiana

Technical Specifications

Sr. No	Product Name	Model No	Make	Pages
A.	High Speed Door Internal Application	RR300+ Alu	ASSA ABLOY	1
B.	High Speed Door Cold Room Application	HS9010PFR	ASSA ABLOY	2
C.	Sectional Door	OH1042P	ASSA ABLOY	3
D.	Retractable Dock Shelter	DS6060A	ASSA ABLOY	4
E.	Inflatable Dock Shelter	DS6060B	ASSA ABLOY	4
F.	Dock Leveler		NIHVA	5
G.	Gear Operated Rolling Shutter		NIHVA	5
H.	Fire Rated Sliding Doors		NIHVA	6
I.	Sliding Doors		ASSA ABLOY	6
J.	Motorised Telescopic Sliding Gate		NIHVA	7
G.	Turstiles		NIHVA	7

A) High Speed Door **Internal Application**





Sr. No	Description	Specifications
1	Description	Flexible High Performance Door, opening in vertical direction for interior use in wind-protected areas
2	Side frames	Made of aluminum
3	Wind resistance	Class 1 (EN 12424)
4	Bottom profile	Anodized aluminum
5	Drive unit	Hollow shaft gear motor with operating current brake
6	Protection	IP 55
7	Control system	MCC Vector Control - frequency converter control system for a dynamic, smooth door movement, located close to the drive unit. Max. Opening Speed 2.2m/s Max. Closing Speed 0.9 m/s
8	Supply voltage	3L(N)PE/380/400/415/440/480V;50/60Hz
9	Safety devices	• Electrical safety contact edge • Evaluation via integrated cable chain • Door line photocell in the side frames • Drop down protection by integrated balancing system
10	Manual activation	By releasing the brake at ground level. Depending on width/height ratio the door opens up to max. 2.0 m

Optional Accessories

Sr. No	Description	Specifications
1	Radar Sensor 	An infrared sensor above the door detects an object (person, vehicle) within a specified distance from the door and opens the door automatically. This is an ideal solution for frequent vehicle or personal traffic.
2	External push button box 	Used for opening & closing of door. Installed on the inside or outside wall beside the door
3	Pull-rope switch 	Pulling the rope opens the door. Installed on the inside construction above the door A pull-rope switch above the door opening can be operated from e.g. a forklift truck.
4	Photo cells 	A set of photocells are mounted on pillars, on each side of the door. When a person or vehicle passes between the photocells, the beam is interrupted and the door opens.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

A) High Speed Door **Cold Room Application**



Sr. No	Description	Specifications
1	Door curtain	Made of 900 g/m2 PVC with self-repairing function, ultramarine (similar to RAL 5002) or red (similar to RAL 3002).
2	Self-supporting side frames	Made of galvanized steel
3	Wind resistance	class 1 (300 Pa (N/m2))
6	Wind penetration	class 1 (30 Pa (N/m2))
7	Air Permeability	class 1 (24 m3/m2/h at 50 Pa)
8	Thermal Transmittance	6.02 W/(m2K)
9	Temperature Working Range	30 to +5 Degree
10	Bottom profile	Flexible Bottom Edge including wireless edge activator
11	Degree of Protection	Operator IP 65 & Control Unit IP54
12	Safety devices	• Photocell in Side Columns • Break away and self-repair function
13	Thermal Protection	• Heating Cables in side columns and motor. • PU Layer between side guides and Wall PU coating on springs
14	Opening and Closing Speed	(open/close) up to max. 2.4/1.2 m/s
15	Supply voltage	400 V 3-phase

Optional Accessories

Sr. No	Description	Specifications
1	Radar Sensor 	An infrared sensor above the door detects an object (person, vehicle) within a specified distance from the door and opens the door automatically. This is an ideal solution for frequent vehicle or personal traffic.
2	External push button box 	Used for opening & closing of door. Installed on the inside or outside wall beside the door
3	Pull-rope switch 	Pulling the rope opens the door. Installed on the inside construction above the door A pull-rope switch above the door opening can be operated from e.g. a forklift truck.
4	Photo cells 	A set of photocells are mounted on pillars, on each side of the door. When a person or vehicle passes between the photocells, the beam is interrupted and the door opens.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019


An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

C) Sectional Door



OH1042P



Vertical Lift
(head room > 2 x height)

Sr. No	Description	Specification
1	Vision Windows	2 Nos at central panel
2	Opening Direction & Mounting	Vertical
3	Opening/Closing Speed	CDM9 0,28 m/s
4	Door Material	GI Steel
5	Panel Thickness	42 mm Square Grid, steel sheet
6	Filling	CFC-free polyurethane
7	Panel colour	RAL 9002 Grey White Powder coated
8	Door sealent	All door sealants made of EPDM rubber, temperature resistant -30/+70
9	Panel Flame Retardent standrad	Flame retardant polyurethane foam according DIN4102-class B2.
10	Water Penetration	EN 12425 class 3
11	Air Permealibity	EN12426 class 3
12	Wind Load	EN21424 class 3
13	Thermal Transittance	EN 12428 1.10W /m2K
14	Bottom sealing	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
15	Door saftey	Doors equiped with spring break device
16	Incase of Power failuer	Doors to be equiped with quick release fuction
17	Operator power conumption	Operator to have a maximum power consumption of 0,37kW and a standby consumption of Maximum 15W
18	Drive Unit & Mounting Type	Single phase 230V direct drive on shaft
19	Emergency Operation	by Disengagement rope manual
20	Operating Switch	Up/Down Keypad + stopbutton
21	Locks : Lock bolt	The Lock bolt locks the door from the inside, without the use of a key. The Lock bolt is not visible from the outside.
22	Environmental Green Product Declaration Certification	As per ISO 14025 and EN 15804

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

D) Retractable Dock Shelter



Retractable Dock Shelter



Docking System (Sectional Door, Dock Leveler, Dock Shelter)

Sr. No	Description	Specification
1	Curtain colour	Black
2	Parking Guides	White, Yellow
3	Wall Fixings	Concrete, Sandwich light Concrete, Load house cavity, insulated panel
4	Top & Side Curtaiins	Double Layer High Quality Polyester
5	Thickness	3.0 mm
6	Weight	Approx 3400 g/m2
7	Continous Roof Cover	One layer high quality Polyester
8	Thickness	0.5 mm

E) Inflatable Dock Shelter






Sr. No	Description	Specification
1	Curtain colour	Black
2	Parking Guides	White, Yellow
3	Walls & Roof	Insulated Pannel 42mm
4	Nominal Depth	700, 1020 mm
5	Top Bag Extension	1000 mm
6	Side Bag Extension	650 mm
7	Fabric Quality	PVC Coated Polyster
8	Top Bag	500 g/m2, Thickness 0.5mm
9	Side Bag Rear	600 g/m2, Thickness 0.5mm
10	Side Bag Front	2500 g/m2, Thickness 2mm
11	Fan	230 V, 1 Phase, 50Hz, 250W
12	Operating	Switch Control Included
13	Temperature Range	-30 Degree to +60 Degree

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

F) Dock Leveler

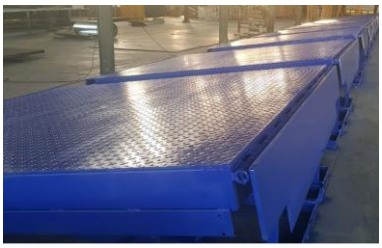



Sr. No	Description	Specification
1	Hydraulic Power pack	1 HP, 3PH
2	Control Panel	By push button Deck UP & Deck Down
3	Deck operation	By push button Deck UP & Deck Down
4	Lip operation	By push button Deck UP & Deck Down
5	Loading platform height from road Level	4 feet (1200 mm)
6	Travel above from Dock level height	350 mm
7	Travel below from Dock level height	200 mm
8	Deck platform size	2000mm (W) x 3000mm (L)
9	Lip sizes	400 mm
10	Clear Pit dimensions	2040mm (W) x 3000mm (L) x 485mm (H)
11	Drive type	Direct by electric Motor
12	Power Consumption	0.75 kw Motor
13	Degree of protection for motor	IP 55
14	Motor RPM	1410 rpm
15	Pump design flow	1.8 LPM
16	Pump pressure	200 bar
17	Safety valve set pressure	90 bar
18	Pump type	Gear
19	In built safety valve	Yes
20	Volume of oil receiver	8 Ltr
21	No of Deck Cylinders	2 Nos
22	Deck Plate Thickness	8 mm Chequered Plate
23	No of Lip Cylinders	1 No
24	Lip Plate	16 mm Thick Plate
25	Dock Bumpers	1 Pair included

G) Gear Operated Rolling Shutter





Sr. No	Description	Specification
1	Rolling Shutter	Gear Operated Rolling Shutter with Galvanised Steel Laths with thickness of 1 mm.
2	Mounting Location area	Inside area / Outside area
3	Curtain Panel	The panel made of 1.0mm thick GI steel
4	Curtain panel size	75mm wide
5	Curtain Profile	Curved
6	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
7	Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
8	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	Hood Cover	Made of GI Sheet Thickness 0.9 mm GI mm with 25x25x3mm angle stiffener
11	Surface finish	2 Coats (each coat of 35 microns DFT) of EPOXY polyamide based enamel finish of approved color and make over a Coat (each one coat 25 microns DFT) of EPOXY polyamide based red oxide zinc phosphate primer
12	Drive Unit & Mounting Type	Gear Assembly

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

H) Fire Rated Sliding Door

120 Minutes
CONFORMS TO IS: 3614 (PART - II), 1992 & BS: 476 (PART 20 & 22)

Sr. No	Description	Specification
1	Door Fabrication	GI / MS sheet having thickness of 18 SWG with overall panel thickness of 40 / 42 mm.
2	Infill material to provide with integrity, stability and insulation.	Mineral Wool
3	Door Type	Single leaf or Double leaf (Biparting Door) or depending upon the requirement and suit the application and conditions prevailing at site.
4	Door Funtionality	This door is always kept into open position and at the time of fire break, fusible link melts which allows the counter weight hung to the wire rope to pull the panel automatically close and to prevent fire from spreading further.
5	Surface Finish	The door are primed with Zinc-Phosphate Stoving Primer and finished with two coats of Polyurethane paint as required up to a minimum of 70 microns

I) Sliding Glass Doors



Sr. No	Description	Specification
1	Power Supply	100-240 VAC/50/60Hz
2	Power Consumption	Max. 250W
3	Opening / Closing – Speed	1.7 m/s
4	Hold Open time	0 – 60sec
5	Ambient Temperature	-20 Degree to +50 Degree
6	Opening time	0.2 Seconds
7	Passage Speed	30 peoples/minute
8	Glass	12 mm thick Toughened Glass
10	Sensor	Motion Sensor for Auto Open and Close

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

J) Motorised Telescopic Sliding Gate



Sr. No	Description	Specification
1	Opening Direction	Horizontal - from left to right or reverse
2	Mounting Location	Inside area
3	Design Pattern	Standard Tubular Design Pattern
4	Outer Frame Tube Sizes	80 x 80 x 3.2 mm
5	Internal Vertical Tube Sizes	40 x 40 x 2 mm
6	Gap Between Tubes	100 mm C/C
7	Bottom Rail on ground	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
8	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chrome plated)
9	Full Height Column sizes	100 x 100 x 3.2 mm
10	Guide Rollers supporter during Gatemovement	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
11	Painting	2 Coats of EPOXY primer and 2 coats of Synthetic enamel paint
12	El motor	100% imported European make Motor
13	Emergency Operation	Manual after turn the switch
14	Telescopic Mechanism	Inbuilt with Gate
15	Operating Switch	Push Button from inside
16	Safety	Photocells, Flashing Light
17	Metal Rack	Zinc plated metal rack

K) Turnstiles





Sr. No	Description	Specification
1	Material	Stainless Steel
2	Rod Length / Thickness	500 mm / Dia 38 stainless steel tube
3	Size	420 x 330 x 980 mm
4	Passage width	600 mm
5	Motor	24V/30W brushless
7	Working Temperature	-40 Degree to 80 Degree
8	Humidity	5% to 9%
10	Opening time	0.2 Seconds
11	Passage Speed	30 peoples/minute