


DRAWING

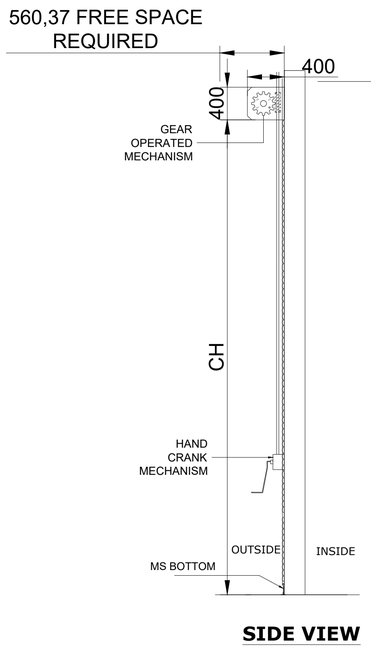


SIDE VIEW

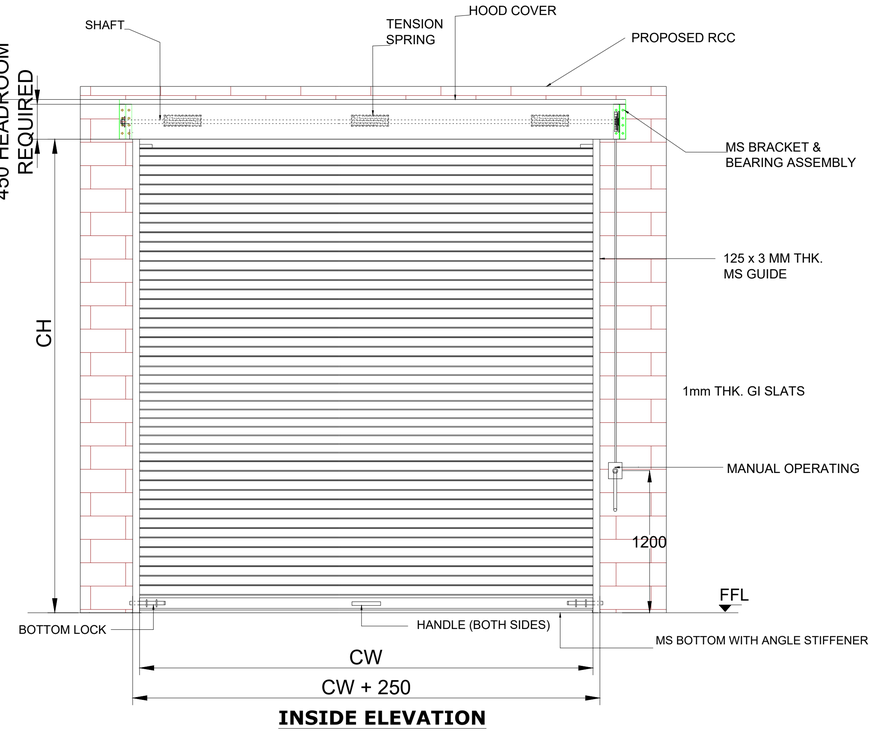


INSIDE ELEVATION

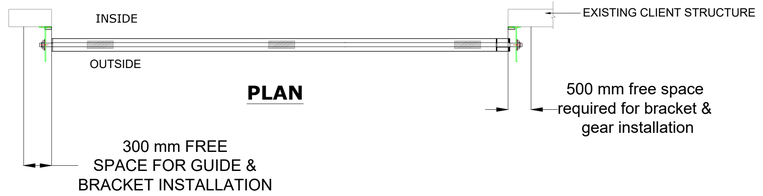

PLAN



M.S. BOTTOM RAIL PROFILE 2.5MM

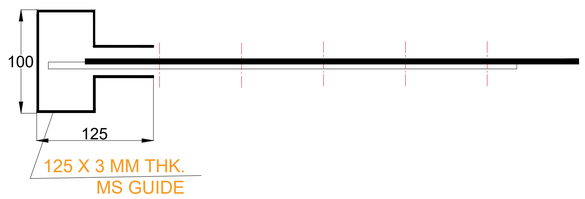

" T " TYPE GUIDE

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.IF STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.

TECHNICAL SPECIFICATION:-

SPECIFICATION	DETAILS
DESCRIPTION & DRIVE	GEAR OPERATED SHUTTER
LOCATION AREA	INSIDE AREA / OUTSIDE AREA
MOUNTING SURFACE	SIDE BRACKETS: ON CONCRETE
SLAT	75 MM WIDE - 1.2 MM THICK GI
BOTTOM PROFILE	M.S. PLATE 100X3.15 MM THICK WITH ANGLE 35X35X5 MM THK
GUIDE PROFILE	M.S."T" SHAPE -100X125X3 MM THK .
HOOD COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
MATERIAL FINISH	SYNTHETIC ENAMEL PAINT

SHUTTER SIZES :- (FOR UTILITY BUILDING)

SR NO	(CW) CLEAR WIDTH	(CH) CLEAR HEIGHT	QUANTITY
1	3000	4000	04 NOS

RIVISION.	DATE
REV 01 : SLAT THICKNESS CHANGE 1MM TO 1.2MM BOTTOM PLATE THICKNESS CHANGE 2.5MM TO 3.15MM ANGLE STIFFENER CHANGE 35X35X3 MM TO 35X35X5 MM	03-12-2025

NOTE :

GALVANISATION SHALL BE MIN 230 g/SQ.M
HANDLE SHOULD BOTH SIDE

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 300-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	V.W.		08-11-2025
CHK'D	B.S.		10-11-2025
APPV'D	V.T.		10-11-2025

PRODUCT - GEAR OPERATED SHUTTER
PROJECT NO - NTPL- 300 | REVISION - 01
SITE LOCATION-GUJARAT | WEIGHT -
MATERIAL - | QTY - 04 NOS
IF ANY QUERIES CONTACT - Design@nihva.com | PROJECTION METHOD | SCALE :
ALL DIMENSIONS ARE IN 'MM' | A2 | SHEET 1 OF 1