RapidRoll® 450/600/600G

The high performance door in the manufacturing industry

ALBANY
ASSA ABLOY

Technical data sheet

ASSA ABLOY, the global leader in door opening solutions



NIHVA

RapidRoll® 450/600/600G

- Safety is ensured by a pre-running photocell.
- Front or rear side moving wind bar or self repairing knock out capability as option.

DOOR MATERIAL

The door (side frame, top roll cover and bottom profile) is made of anodised aluminium.

DOOR CURTAIN

The door curtain is made of clear PVC with blue (RAL 5002) reinforcement stripes. Further colours are optionally available for the reinforcement stripes: red (RAL 3002), beige (RAL 1014), yellow (RAL 1021), orange (RAL 2011), green (RAL 6018), white (RAL 9016) and grey (RAL 7035). Additionally silicon-free reinforcement stripes in the colours blue (RAL 5010), red (RAL 3002), yellow (RAL 1021), orange (RAL 2011), white (RAL 9010), alu-grey (RAL 7037) and black (RAL 9005) are available.



WINDOWS

In case of an increased demand a curtain made of RollTex® Plus is available in the colours: orange (RAL 2009), blue (RAL 5002) and grey (RAL 7001). The insert of a window is possible. (illustration also shows wind bars which are optionally available.)



SAFETY FEATURES

The door is equipped with a pre-running safety photocell and a door line photocell - prevents the door from closing when an object is in the doorway.

Option: an electrical safety contact edge can be choosen.

ACTUATORS

Individual applications can include additional safety devices. Actuators such as infrared, radar detectors, push buttons, vehicle detector loops or radio transmitters can be added to the control system. Please contact us for additional information for your specific needs.





TOP ROLL COVER

Top roll cover is not a standard door feature.

Optional a top roll cover is available made of anodised aluminum.

MOTOR COVER

The motor cover is not a standard door feature.

Optional a motor cover is available in plastic.



MOTOR POSITION

Available left or right hand side.

TOP ROLL

The door type 450 is equipped with an aluminum top roll. The types 600 and 600G come with a top roll made of steel.

TORSTEUERUNG

Depending on requirements for opening/closing speed and actuators, two different control systems can be chosen: The basic contactor control ACS 50 as well as the innovative frequency converter control MCC Vector Control for an extremely smooth run. The MCC control unit is installed directly under the drive unit. The control panel with convenient foil keys and a graphic display of the MCC Control unit is mounted on the side frame or on the wall. Comprehensive diagnoses and error codes are available on the display.





KNOCK-OUT CAPABILITY

As option a self repairing knock-out capability is available. In the event of a collision the bottom profile breaks away, causing a sensor to stop the door. The door can be easily reset by hand.



High performance door RapidRoll® 450/600/600G

ALBANY
ASSA ABLOY

ADVANTAGE OF ALBANY RAPIDROLL® 450/600/600G:

- the pre-running safety photocell (transmitter / receiver) offers a maximum of safety
- the tensioning curtain system ensures controlled safe opening and closing of the door and makes sure the curtain is always tensioned
- by using various control systems individual functions and different speeds of doors are available
- the door curtain counter-balance system, which uses tension springs, offers drop down safety

APPLICATION

- for exterior doorways, to avoid draft
- for interor doors as a partition between two factory areas

DESIGN

The side frames of the door are made of extruded anodised aluminium. The self-supporting side frames are fixed only on the head- and the base plates on each side. The frames contain springs for tensioning and for counterbalancing the weight of the door curtain. In case of service, the front plate of the side frames can easily be opened or refitted. The top roll is made of aluminium (model 450) resp. steel material (model 600 and 600G).

DOOR CURTAIN

The door curtain is made of clear PVC with blue reinforcement stripes. Optional other colours can be chosen. For applications with high mechanical requirements a curtain of RollTex® Plus is available. As standard the door includes a tensioning system providing extra strength against wind pressure. The edges of the door curtain are reinforced with special wind tabs which are guided in the side frames. As option running windbars - moving in front or rear side of the curtain - are available. Moving windbars require additional space in height.

KNOCK-OUT CAPABILITY

A selfrepairing knock-out capability is available as an option.

DRIVE UNIT

Gear motor. Position can be chosen right - or left-hand.

CONTROL UNIT

The model 450/600/600G is fitted with a frequency converter control system MCC^{VectorControl} as standard. The contactor control system ACS 50 is available for door type 450/600 as option.

MANUAL ACTIVATION

In event of a power outage the manual release handle enables the door to be opened easily.

SAFETY FEATURES

This door is designed according to the regulations of the Workplace Directive of the UVV as well as the harmonized CE Guidelines including the EN 13241-1.

INDICATION OF RISK

The safeties of the door conform to product standards and the corresponding harmonized CE-Guidelines. In consideration of the situation on site - especially in case of use by pedestrians - additional safety measures, like additional actuators may be required. Besides to this, special environmental conditions may have impact on the right choice of doortype. In case of any doubt please contact our sales engineer for advice in your application.

TECHNICAL DATA

Interior door	suitable
Exterior door	suitable
Wind resistance	Class 2 - EN 12424
Door dimension (mm) (B min./max.) (H min./max.)	 2000 / 7500 mm 2500 / 6000 mm
Opening direction	vertical
Surface	
Side frames	anodised aluminium
Bottom profile	anodised aluminium
Top roll DW und DH ≤ 4500 mm DW oder DH > 4500 mm	 anodised aluminium steel
Coloured surface RAL	•
Covers (optional) Top roll cover Motor cover	 •[1] •[1]
Door curtain (alternatively)	
PVC with blue reinforcement stripes	✓
PVC with coloured reinforcement stripes	•
PVC with silicon-free reinforcement stripes blue / black	•
RollTex® Plus* *optional with windows	• •
Wind taps	✓
Curtain tension	✓
Counterbalance	✓
Control / Drive unit	
Drive unit	electrical
Chain drive	• up to 6000 x 6000 mm
MCC^{VectorControl}	✓ Typ 450/600/600G
ACS 50	• Typ 450/600
Safety	
Electrical safety contact edge	•
Pre-running safety photocell	✓
Door line photocell	✓
Fall down protection	✓ tension springs
Knock-out capability	•
Self-opening	✓
Manual activation	✓ with bowden lever operated from the floor
Lintel support rollers	•
Second bowden lever	•
Extended flexible seal	•

Speed (m/s)	ACS 50 450/600	MCC^{VectorControl} 450/600/600G
Open/close up to max.	0,8/0,8	2,2/0,9
Fusion protection on site	10 A [2]	10 A [3]
Control voltage	24 V DC	24 V DC
Protection degree	IP 55	IP 55
Motor power kW	1,1 kW	1,1 kW
3L/(N)/PE 220/230/380/400/415V; 50 Hz	✓[4]	
3L/(N)/PE 380/400/415/440/480V; 50/60 Hz		✓[5]
Additional opening heights	–	✓
Potential free contacts max. 250 V	✓	•

Traffic light function	ACS 50	MCC^{VectorControl}
Without direction detection	✓	✓ 24 V DC
Without direction detection	–	✓ 24 V DC
Flashing alarm	✓	✓ 24 V DC
Error message	✓ LEDs	✓ plain text


- • Option
- ✓ Standard
- – not possible


[1] For doors of heigth ≤ 2,5 m the use of top roll and motor cover is required according to standard EN 13241-1.
[2] 16 A for 220/230V
[3] 10 A preferable, maximal 16 A
[4] Transformer necessary for 440/480/500V
[5] Transformer necessary for 220/230/500V


NIHVA


General drawing RapidRoll® 450/600/600G

ALBANY
ASSA ABLOY

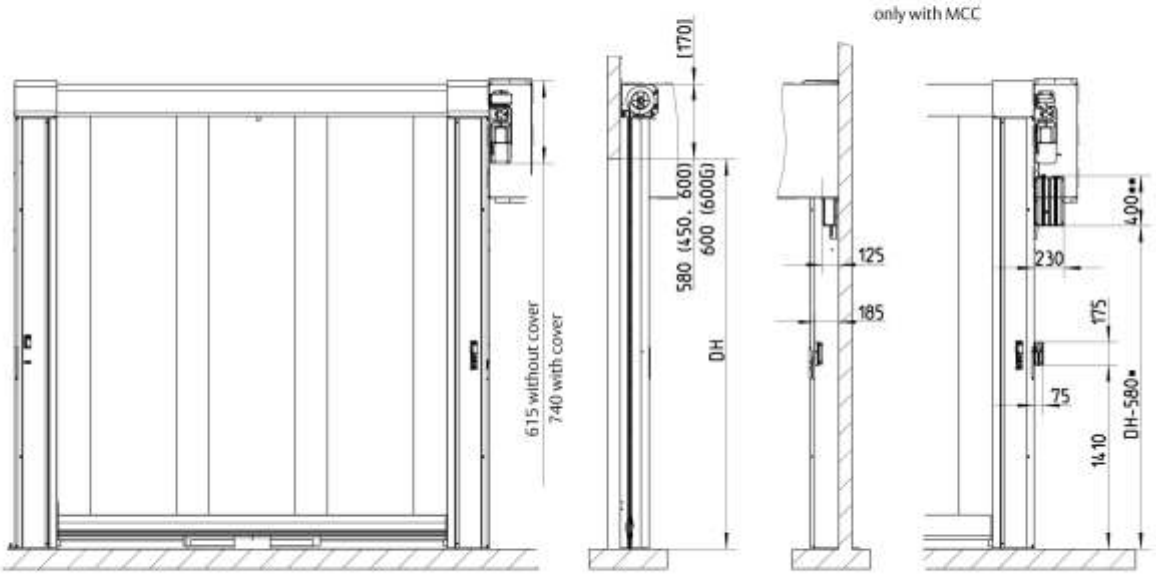

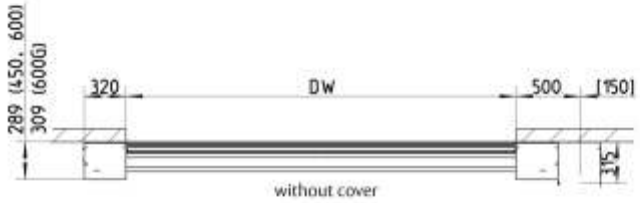



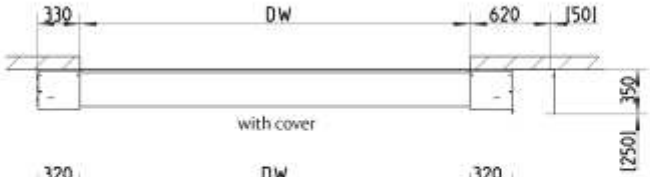




[ ] = Space needed for installation

Control Unit			
		450/600/600G MCC	450/600 ACS 50
Opening speed	max. (m/s)	2,2	0,8
Closing speed	max. (m/s)	0,9	0,8
Dimensions W x H x D	mm	220 x 380 x 100	300 x 400 x 210

450/600:
Important for crash mechanism:
The door width (DW) between the side columns has to be less or exactly the same as the clear opening of the building.

Available sizes:

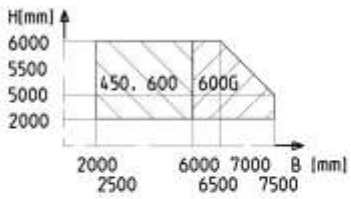

NIHVA


ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

ALBANY
ASSA ABLOY

www.assaabloyentrance.com

Fixing plan RapidRoll® 450/600/600G


Fixing over lintel

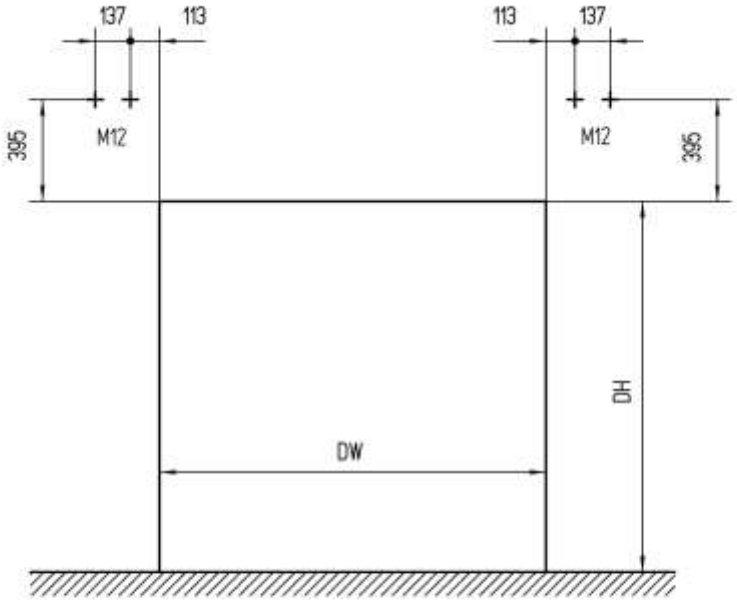


For assembly at steel sections
(e.g. trapezoidal sheet metal front)




Supporting plate



Fixing to floor





Date: 18.07.2008

ASSA ABLOY Entrance Systems
Albany Door Systems

NIHVA
NIHVA Technologies Pvt. Ltd.

www.albanydoors.com

QR-Code
Get further informations by scanning the QR-code with your smartphone and a appropriate application.

Copyright by Albany ASSA ABLOY

64 05 R106 J 12/11 EN Technical data subject to change without notice