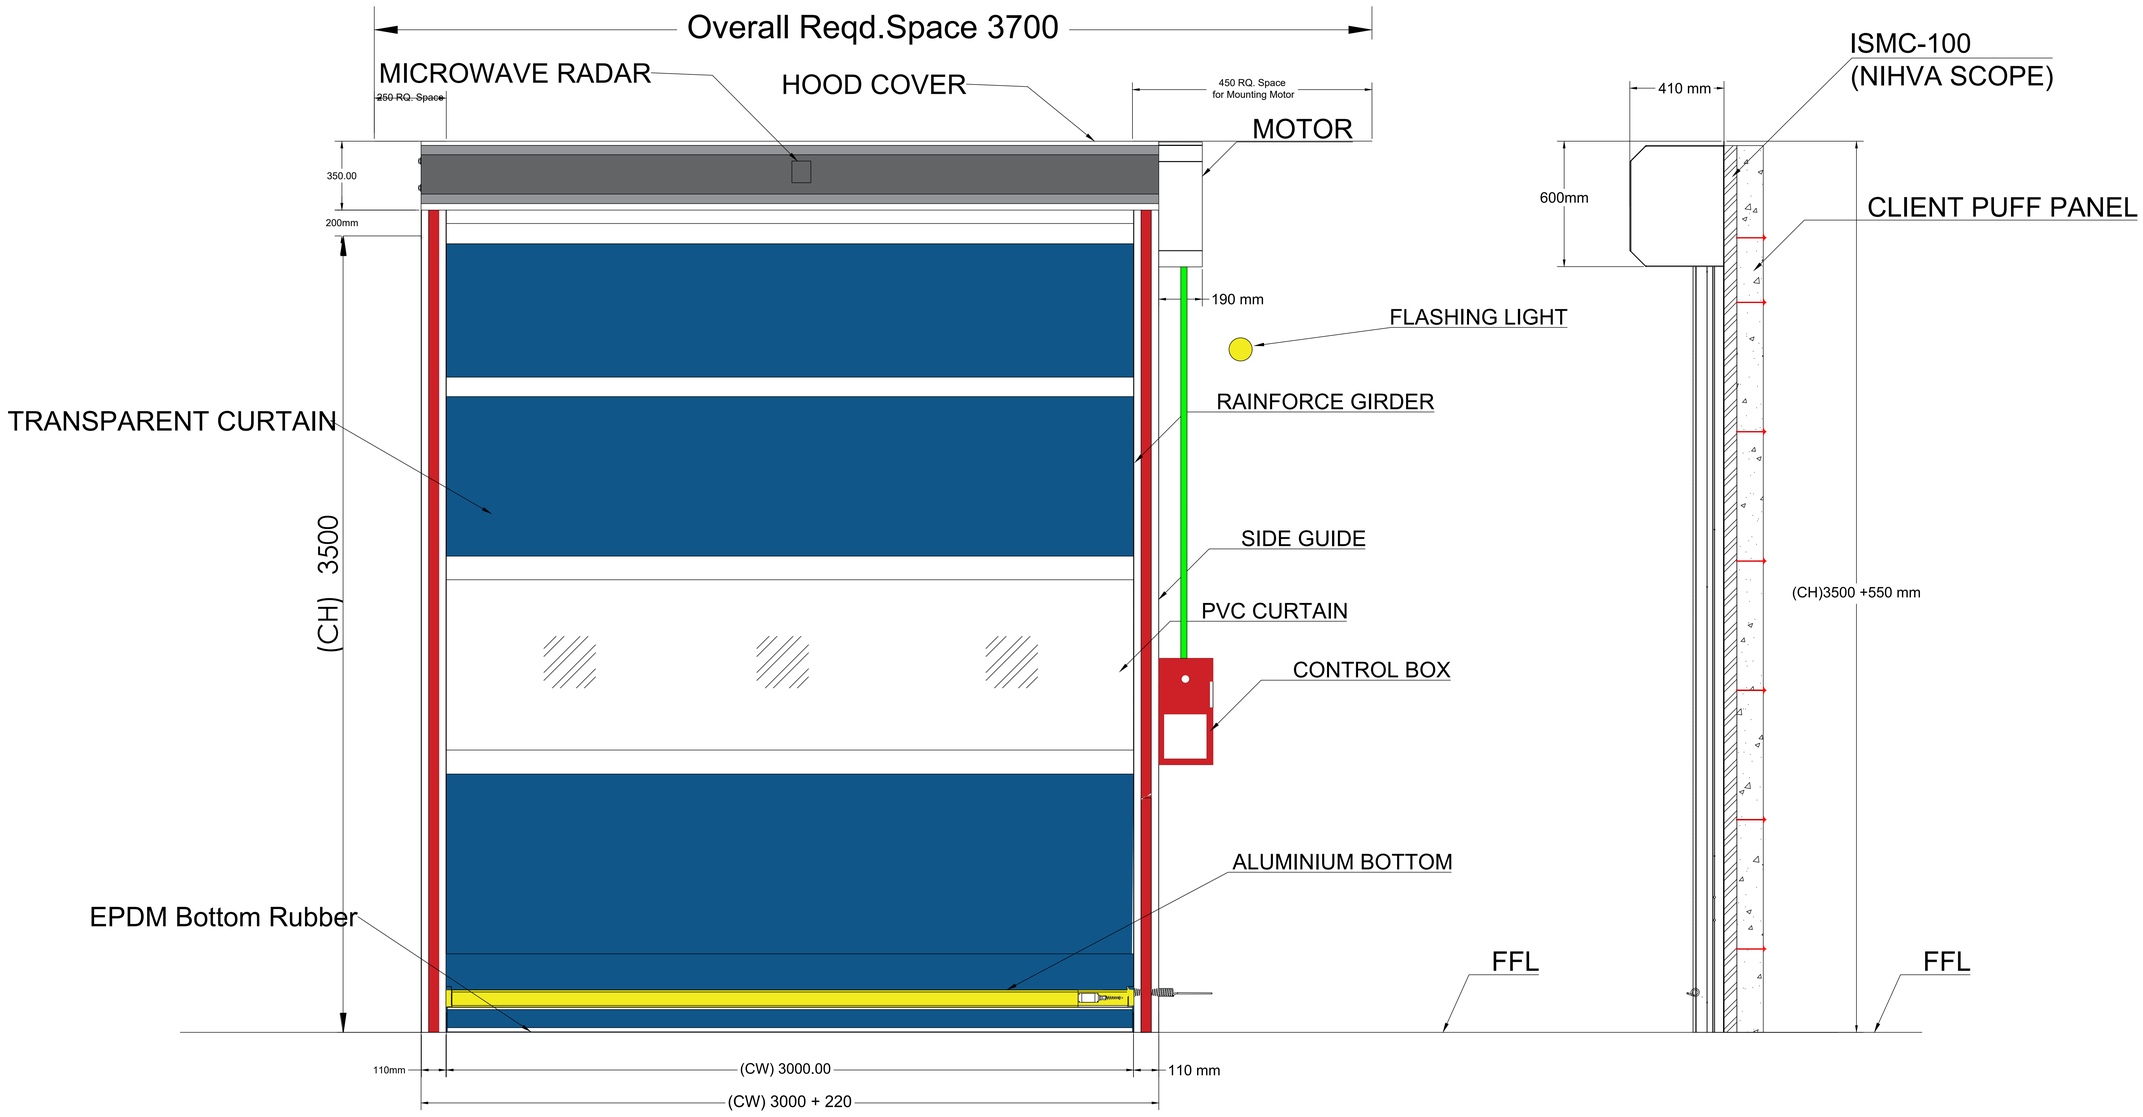



## TECHNICAL SPECIFICATION :

| SR. | SPECIFICATIONS | DETAILS |
|---|---|---|
| 1 | Control Panel | LED Display Servo Controller : -<br>Operating Speed (Adjustable) : 1.4~2.5 min/<br>Working Temperature : -35 degree to 65 degree -<br>Water Resistant : IP65 Make IDER, manufactured under European Standards |
| 2 | Drive | IDER Make ,CE Certified |
| 3 | Motor Power ,Torque | Power : 1.1 kW Torque : 65 Nm |
| 4 | Door Travel Speed | Opening: 2 m/Sec & Closing:0.9m/Sec |
| 5 | Safety Device | Safety Photocell Pair & Safety Edges |
| 6 | Surface Finish | As Per Client Requirement |
| 7 | Accessories | Radar Sensor ,Magnetic Loop Detector ,Flashing Light Buzzer |

| Sr | Clear Width (CW) | Clear Height (CH) | QTY |
|---|---|---|---|
| 1 | **3000** | **3500** | 1 |

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: HIGH SPEED DOOR WITH SENSOR GA DRAWING

| | NAME | SIGN | DATE |
|---|---|---|---|
| DRAWN | | | |
| CHECK | | | |
| APPRD. | | | |

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

If any queries contact : projectsupport@nihva.com

REV- R00

ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: