
SOLIDO

Maestro in making SOLID TYRES

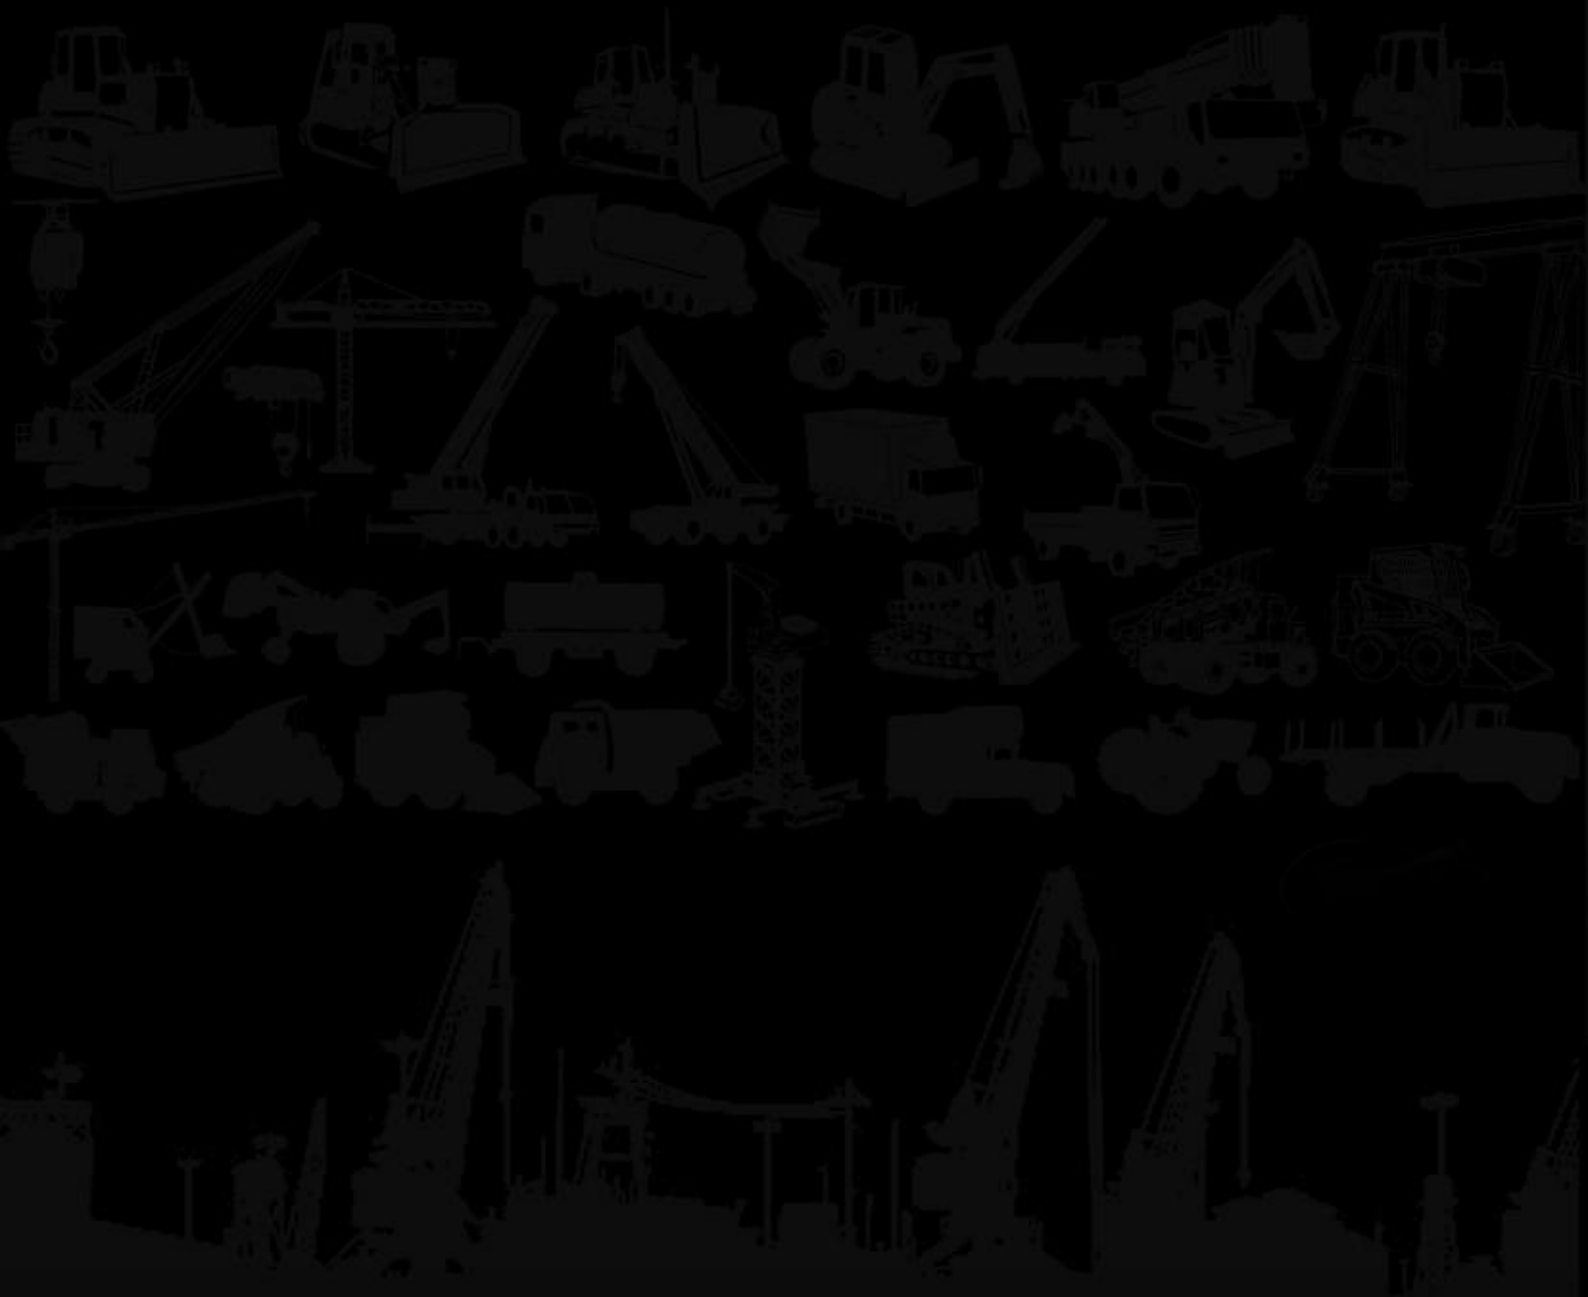

Industrial Rubber Company

TO KEEP YOU SAVE

SOLIDO

Resilient Tyres





REACH FORKLIFT TRUCKS



COUNTER BALANCE FORKLIFTS



ROUGH TERRAIN FORKLIFTS



SIDE LOADER FORKLIFTS



TELESCOPIC HANDLER FORKLIFTS



TRAILER



TIPPER




DUMPER

Tyre Size	Tyre Size (Metric)	Rim Size	Tread	Tyre Dimensions in mm			Load Capacity (kg)					
				Outer Dia	Side wall Width	Tread Width	Counterbalanced lift trucks 25km/h		Other Vehicles			Static 0km/h
							Load Wheel	Steer Wheel	6km/h	10km/h	25km/h	
3.00-4		2.10-4,2.50-4	RIB	250	85	75	255	195	255	230	195	295
3.50-4		2.10	RIB	250	89	83	260	195	255	230	195	295
4.00-4		2.10-4,2.50-4	LUG	300	92	84	535	410	535	485	410	620
3.00-5		2.15-5	RIB	267	78	70	435	335	435	395	335	505
3.50-5		3.00	RIB	298	101	90	520	400	520	470	400	605
10.5X4-6	100/55-6	3.25-6	LUG, RIB	267	100	90	620	475	620	560	475	715
	140/55-6	4.50	LUG	310	140	130	1075	825	1075	975	825	1245
	100/50-8	2.00-8, 2.50-8,3.00-8	LUG	302	102	92	710	545	710	645	545	825
12X3 1/2-8		3.00	SM	308	98	87	850	650	850	700	625	950
	100/80-8	2.50	SM	359	104	90	755	580	755	685	580	875
15X4 1/2-8	125/75-8	3.00, 3.25	LUG, RIB	374	114	104	1040	800	1040	940	800	1210
15X4 1/2-8	125/75-8	3.00, 3.25	SM	374	114	104	1040	800	1040	940	800	1210
4.00-8		2.75, 3.00	LUG, RIB	402	103	93	950	730	950	860	730	1100
4.00-8		3.75	RIB	405	119	110	950	730	950	860	730	1100
16X6-8	150/75-8	4.33	LUG	407	153	142	1495	1150	1495	1355	1150	1735
17X7-8		4.33	SM	430	150	140	2000	1540	2000	1800	1700	2300
5.00-8		3.00	LUG	450	114	104	1415	1090	1415	1285	1090	1645
5.00-8		3.75	RIB	450	114	104	1415	1090	1415	1285	1090	1645
18X7-8	180/70-8	4.33	LUG, RIB	450	156	142	2145	1650	2145	1945	1650	2490
18X9-8		7.00-9	LUG	457	214	204	2535	1950	2535	2300	1950	2945
	140/55-9	4.00-9	LUG	377	130	120	1170	900	1170	1060	900	1360
16X5-9		4.00-9,3.50-9	LUG	406	129	120	1050	810	1050	950	810	1225
18X6-9	160/75-9	4.00-9	LUG	452	145	135	1625	1250	1625	1475	1250	1890
5.00-9		3.50-9	LUG	487	129	120	1445	1110	1445	1310	1110	1675
20x6-9		4.00-9	LUG	494	140	130	2600	2200	2600	2500	2350	3000
20x8-9		6.00-9	LUG	494	191	181	2800	2350	2800	2700	2550	3200
6.00-9		4.00	LUG	514	154	140	1885	1450	1885	1710	1450	2190
21X8-9	200/75-9	6.00	LUG	518	183	170	2755	2120	2755	2505	2120	3200
4.00x9.75		3.75-9	LUG	427	122	111	1050	810	1050	950	810	1225
	180/60-10	5.00-10	LUG	452	160	150	2405	1850	2405	2185	1850	2795
	200/50-10	6.50-10	LUG	453	200	190	2470	1900	2470	2240	1900	2870
21X7-10	180/80-10	5.00-10	LUG	524	162	152	2210	1700	2210	2005	1700	2565
6.50-10		5.00, 5.50	LUG	566	160	150	2340	1800	2340	2125	1800	2720
23X9-10	225/75-10	6.50	LUG	574	200	186	3445	2650	3445	3125	2650	4000
7.50-10		5.00,5.50	LUG	631	180	170	3070	2360	3070	2785	2360	3565
23X10-12	250/60-12	8.00-12	LUG	584	233	212	3770	2900	3770	3420	2900	4380
23X12-12	315/45-12	10.00-12	LUG	586	242	232	3770	2900	3770	3420	2900	4380
7.00-12		5.00	LUG	645	160	150	2920	2240	2920	2645	2240	3380
27x10-12		8.00	LUG	660	242	225	3400	2800	3400	3200	3000	3800
23X5-13	150/100-13	3.75-13	LUG	621	146	136	1715	1320	1715	1560	1320	1995
5.50-15		4.50-15	LUG	665	154	145	2430	1870	2430	2205	1870	2825
28X9-15(8.15-15)	225/75-15	6.50, 7.00	LUG	690	218	208	3770	2900	3770	3420	2900	4380
6.00-15		4.50-15	LUG	698	160	150	2725	2095	2725	2470	2095	3165
7.00-15		5.50-15, 6.00-15	LUG	725	183	170	3545	2725	3545	3215	2725	4115
28X12.5-15	345/45-15	9.75	LUG	705	275	265	5525	4250	5525	5325	5150	6250
2.50-15	250/70-15	7.00, 7.50	LUG	706	220	210	4745	3650	4100	3900	3650	4800
	355/50-15	9.75	LUG	712	295	285	5800	5500	5800	5700	5600	6200
8.25-15		6.50-15	LUG	800	203	189	4600	3540	4600	4175	3540	5345
7.50-15		5.50, 6.00, 6.50	LUG	805	172	160	3900	3000	3900	3540	3000	4530
3.00-15	315/70-15	8.00	LUG	809	258	248	5850	4500	5850	5650	5500	6300

Tyre Size	Tyre Size (Metric)	Rim Size	Tread	Tyre Dimensions in mm			Load Capacity (kg)					
				Outer Dia	Side wall Width	Tread Width	Counterbalanced lift trucks 25km/h		Other Vehicles			Static 0km/h
							Load Wheel	Steer Wheel	6km/h	10km/h	25km/h	
32X12.1-15	355/65-15	9.75	LUG	810	285	275	7000	5450	7000	6800	6650	7500
	400/60-15	11.00	LUG	810	318	308	8970	6900	8970	8750	8600	9400
6.50-16		5.50, 6.00, 6.50	LUG	743	194	184	2600	2000	2600	2360	2000	3020
7.50-16		5.50, 6.00, 6.50	LUG	794	210	200	3965	3050	3965	3600	3050	4605
8.25-16		5.50, 6.00	LUG	808	192	180	4750	3650	4750	4550	4400	5200
8.25-20		6.50, 7.00, 7.50	LUG	800	203	190	4380	3650	4380	3980	3650	5510
	355/50-20	10.00	SM	810	285	275	8970	6900	8970	8800	8670	9500
7.50-20		6.00,6.50	LUG	870	200	190	3900	3250	3900	3575	3250	4910
9.00-20		6.50, 7.00, 7.50	LUG	970	230	220	5400	4500	5400	4905	4500	6795
10.00-20		6.50, 7.00,8.00, 8.50	LUG	1000	258	248	5850	4875	5850	5315	4875	7360
10.00-20		7.50, 8.00, 8.50	SM	1000	258	248	5850	4875	5850	5315	4875	7360
11.00-20		7.50, 8.00, 8.50	LUG,SM	1060	256	248	6540	5450	6540	5940	5450	8230
12.00-20		8.00, 8.50, 10.00	LUG, SM	1080	255	248	7560	6300	7560	6865	6300	9515
13.00-20		8.00, 8.50	SM	1140	295	285	7800	7300	7800	7700	7600	8200
12.00-24		8.50, 10.00	LUG	1210	300	255	8040	6700	8040	7305	6700	10115
48.5X14-24	355/85-24	11.25-24, 12.00-25	LUG, SM	1216	377	365	10800	9000	10800	9810	9000	13590
14.00-24		10.00-24 ,11.25-24	LUG	1320	390	323	11100	9250	11100	10085	9250	13970
14.00-25		10.00	LUG	1320	390	298	11100	9250	11100	10900	10700	11500

✱✱ *Specifications are Subject to Change without notice.*

WARRANTY					
QUALITY	WORKING HOURS PER DAY	NO. OF MONTHS	TOTAL HOURS	FLOOR CONDITION	APPLICATION
STANDARD	8 Hrs	6 MONTHS	1440	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
PREMIUM	15 Hrs	6 MONTHS	2700	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
HEAVY DUTY	18 Hrs	6 MONTHS	3240	ROUGH FLOOR	HARD APPLICATION
HEAVY DUTY HEAT RESISTANTS (HDHR)	20 Hrs	6 MONTHS	3600	ROUGH FLOOR	HOT APPLICATION
CUT AND CHIP RESISTANTS (CCR)	20 Hrs	3 MONTHS	1800	ROUGH FLOOR	SCRAP YARD, STEEL & MINING APPLICATION
FIRE RESISTANTS (FR)	20 Hrs	3 MONTHS	1800	FIRE AREAS	STEEL, FURNACE & UNDER GROUND MINING APPLICATION

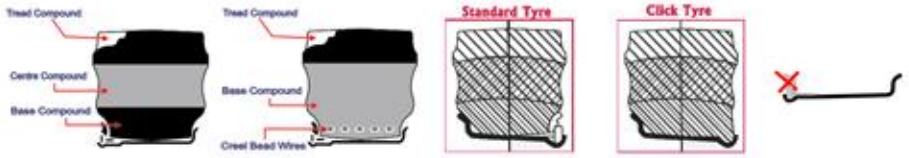

3 LAYER 2 LAYER STANDARD CLIP / LIP

- No Lock rings !
- Mounting time – 30 Seconds !
- Better grip on the rim !

Available as Lip / Limpet / Click / Clip-lock / Quick Fix Versions
Available with or without steel bead wire
All Specifications are in accordance with ETRTO

Dimensional tolerances as per E.T.R.T.O.

Nominal section width +4%

Nominal overall diameter +/- 1.5%

Nominal rim diameter +0.005"/ - 0"(designated sizes) H11 according to ISO 286-2

Nominal rim diameter (metric sizes) H11 according to ISO 286-2

The click tyre has the advantage of being easily and quickly fitted. The special base design guarantees that the click tyre fits firmly on the rim base element without moving. Lock rings and flange rings are not required.

SOLIDO

Lifting Equipments Tyres





SCISSOR LIFT



VERTICAL MASTS



PUSH AROUND



ARTICULATING BOOMS



TELESCOPIC BOOMS



TELEHANDLERS

Types of Equipment	Model No	Equipment Manufacturer	Pneumatic tyre			Solid Tyre			Load carrying capacity 25km/hr
			Size	OD	Width	Size	OD	Width	
Vertical Mast Boom	STAR 6 , STAR 6 Picking	Haulotte	-----			12.5 x 4	318	104	230 kg / 5km/hr
Vertical Mast Boom	STAR 8 , STAR 10	Haulotte	-----			16 x 5 x 10.5	406	127	200 kg / 5km/hr
Scissor Lift Electric	Compact 8 , Compact 8w , Compact 10 , Compact 10 N , Compact 12 ,Compact 14 , GS-2032, GS-2632 ,GS-3232 ,GS-2046 , GS-2646 ,GS-3246 , GS-4047	Haulotte ,Genie	-----			15 x 5 NM	381	127	350kg / 3.3km/hr
Scissor Lift Electric	Optimum 8	Haulotte	-----			318 x 105	381	105	230kg / 4.5km/hr
Scissor Lift Electric	Compact 10 RTE , Compact 12 RTE	Haulotte	26 x 12 - 12	660	304	27 x 10 - 12	660	244	565kg / 5.8km/hr
Scissor Lift Diesel	Compact 10 DX , Compact 12 DX	Haulotte	26 x 12 - 16.5	660	304	27 x 10 - 12	660	244	565kg / 5.5km/hr
Scissor Lift Diesel	H12 SX , H12 SXL , H15 SX , H15 SXL , H18 SX , H18 SXL,	Haulotte	10 x 16.5	775	267	30 x 10 x 20	760	255	700kg / 6km/hr
Articulating booms Diesel	HA 120 PX , HA 20 RTJ	Haulotte	10.5/80 - 18	907	274	36 x 12 x 20	915	305	230kg / 5km/hr
Articulating booms Diesel	HA 16 RTJ , HA RTJO , HA 16 RTJ PRO , 600AN Narrow , 600AJN Narrow , 60H , Z-45/25 , Z-45/25J , Z-34/22 , Z-45/25 DC , Z-45/25J DC , SJ63 AJ	Haulotte, JLG, Genie, SKYJACK	14 x 17.5	930	350	36 x 14 x 20	915	350	230kg /5.2km/hr
Articulating booms Diesel	HA 18PX , HA 20 RTJ PRO , HA 26 RTJO , HA 26 RTJ PRO	Haulotte	385/65 - 22.5	1066	370	385/65 - 24	1066	370	230kg / 5.2km/hr
Articulating booms Diesel	HA 32 RTJ PRO , HA 41 RTJ PRO	Haulotte	445/65-22.5	1150	430	445/65 - 24	1150	430	250kg / 5km/hr
Articulating booms electric	HA12 CJ , HA12 CJ+	Haulotte	-----			598 x 190 NM	598	190	250 kg / 6 km/h
Articulating booms electric	HA12 IP	Haulotte	------			6 x 12" NM	152	305	230 kg / 4.5 km/h
Articulating booms electric	HA15 IP	Haulotte	-----			23 x 10 -12 NM	250	60	230 kg / 4.5 km/h
Telescopic booms	H14 TX , H16 TPX ,600AN Narrow , 600AJN Narrow , 60H	Haulotte	14 - 17.5	930	350	36 x 14 x 20	915	350	230 kg / 5,5 km/h
Telescopic booms	HT21 RT O , HT21 RT PRO , Ht23 RTJ O , HT23 RTJ PRO	Haulotte	385/65 - 22.5	1066	370	385/65 - 24	1066	370	230 kg / 6.5 km/h
Telescopic booms	HT28 RTJ O , HT28 RTJ PRO	Haulotte	cured on 1025 x 365	1025	365	1025 x 365 COW	1025	365	230 kg / 5 km/h
Telescopic booms	HT43 RTJ PRO	Haulotte	445/65 - 22.5	1150	430	445/65 - 24	1150	430	450 kg / 5 km/h
Compact Telehandler	HTL3210 TIER III , HTL3510 TIER III , HTL4010 TIER III , 2906H	Haulotte , JLG	405/70 - 20	1085	405	42 x 16 x 20	1075	405	3200 kg/25 km/h(Travel mode) 8 km/h (working mode)
Heavy load capacity	HTL5210 TIER III	Haulotte	400/80-24	1250	414	49 x 16 x 24	1244	406	5200 kg/30km/h (Travel mode) 8 km/h(working mode)
Heavy load capacity	HTL7210 TIER III	Haulotte	18 x 22.5"	1150	430	445/65 - 24	1150	430	7200 kg /30 km/h
High lift	HTL3614 TIER III , HTL3617 TIER III	Haulotte	405/70 - 24	1085	405	42 x 16 x 24	1075	405	3600kg/30km/h (Travel mode) 8 km/h (working mode)
High lift	HTL4014 TIER III , HTL4017 TIER III	Haulotte	400/80 - 24	1250	414	49 x 16 x 24	1244	406	4000 kg /30 km/h (Travel mode) 8 km/h (working mode)"
Articulating Boom Lifts	340AJ , H340AJ Hybrid , Z-34/22 IC 4WD	JLG , Genie	265/50 D 20 (10 x 16.5)	775	267	30 x 10 x 20	760	255	230 kg / 5 km/h
Articulating Boom Lifts	450AJ NEW , Z-45/25 RT , Z-45/25J RT , Z-45/25 XC	JLG , Genie	33/15.50 x 16.5, 12 x 16.5, 315/55 D20	854	315	34 x 12 x 20	860	305	249.50 kg 6.80 km/h
Articulating Boom Lifts	600A , 600AJ , 660SJ , Z-60/37DC , Z-60/37DC , Z-60/37FE , Z-62/40	JLG , Genie	355/55 D 625 (14 x 17.5)	947	350	38 x 14 x 24	970	350	454 kg / 6.80 km/h
Articulating Boom Lifts	740AJ	JLG	445/55 D 19.5	1024	445	40 x 18 x 20	1016	450	230 kg / 4.80 km/h
Articulating Boom Lifts	800A , 800AJ	JLG	18 x 19.5	1150	430	445/65 - 24	1150	430	454 kg / 4.80 km/h
Articulating Boom Lifts	1250AJP , ZX-135/70	JLG , Genie	445/50 D 710	1188	445	445/65 - 24	1150	430	450 kg /5.20 km/h
Articulating Boom Lifts	1500AJP	JLG	1115 x 428 x 800	1115	428	44 x 17 x 31 COW	1117	431	450 kg / 4.50 km/h
Telescopic Boom Lift	400S , 460SJ , Z-45/25 , S-40 , S-45 , SJ40 T , SJ45 T	JLG , Genie , SKYJACK	12 x 16.5 (315/55 D20)	850	324	34 x 12 x 20	860	305	450 kg /7.20 km/h
Boom Lift	600S	JLG	39 x 15 - 22.5 (15 x 19.5)	990	350	40 x 14 x 20	1015	350	450 kg / 6.80 km/h
RS Series Telescopic Boom Lift	18RS	JLG	33.5 x 12 - 20	850	305	33 x 12 - 20	826	305	227 kg / 4.20 km/h
RS Series Telescopic Boom Lift	24RS	JLG	39 x 15 - 22.5	990	350	40 x 14 x 20	1015	350	227 kg / 4.50 km/h
Telescopic Boom Lift	1030S , 1100SJ , S-100 & S-105	JLG , Genie	385/65 - 22.5	1072	385	385/65 - 24	1066	370	330 kg /4.80 km/h
Telescopic Boom Lift	800S , 860SJ	JLG	15 - 625	1018	381	40 x 16 x 20	1016	406	450 kg / 5.60 km/h
Ultra Series Telescopic Boom Lift	1200SJP , 1350SJP , 1500SJ , 1850SJ , SX-125 , S-120 , SX-135 , SX-125 , SX-150 , SX-180	JLG ,Genie	445/50 D 710	1188	445	445/65 - 24	1150	430	450 kg / 5.20 km/h
Articulating Boom Lift	E300AJP , E300AJ	JLG	-----			7.00 - 12 NM	645	150	226.80 kg/4.80 km/h
Articulating Boom Lift	E400AJP , M400AJP , E450A , E450AJ , M450AJ	JLG	240/55 - 17.5	708	240	28 x 12.5 x 15 (345/45-15)	705	275	226.80 kg/5.10 km/h
Articulating Boom Lift	E400AJPN , E400AN , M400AJPN	JLG	------			22 x 6 x 17 3/4 NM (F), 7.00 - 12 NM (R)	559/645	152/160	226.80 kg/4.80 km/h
Telescopic Boom Lifts	E600J , M600J , E600JP , M600JP	JLG	36 x 14 - 22.5	914	356	36 x 14 - 20	915	350	230 kg /4.80 km/h

Types of Equipment	Model No	Equipment Manufacturer	Pneumatic tyre			Solid Tyre			Load carrying capacity 25km/hr
			Size	OD	Width	Size	OD	Width	
Toucan Mast Boom Lift	T10E Toucan	JLG	-------			406 x 125 (16 x 5) NM	406	125	200 kg / 5.50 km/h
Boom Lifts	60H , 80HX , 80HX+6	JLG	15 x 19.5	1035	400	40 x 14 x 20	1015	350	
Boom Lifts	120HX	JLG	445/65 R 22.5	1150	445	445/65 - 24	1150	430	450 kg /5.20 km/h
Electric Scissor Lift	1930ES , 1532R , R6 , 1932R , 4045R	JLG	--------			323 x 100 NM (13 x 4)	323	100	230kg /4.80 km/h
Electric Scissor Lift	2646ES , R10 , 3246ES	JLG	--------			406 x 125 (16 x 5) NM	406	125	450 kg / 4.0 km/h
Electric Scissor Lift	3369LE , M3369LE , 4069LE , M4069LE	JLG	240/55 x 17.5 NM	708	240	28 x 12.5 x 15 (345/45-15)	705	275	450 kg / 4.80 km/h
Engine Powered Scissor Lift	260MRT	JLG	--------			26 x 12	660	305	570 kg / 5.60 km/h
Engine Powered Scissor Lift	330LRT , 430LRT , GS-3390RT, GS-4390RT , GS-5390RT	JLG , Genie	33/15.50 - 16.5	854	315	34 x 12 x 20	860	305	909 kg /5.60 km/h
Engine Powered Scissor Lift	530LRT	JLG	12 x 16.5	850	324	34 x 12 x 20	860	305	680 kg / 5.60 km/h
Telehandler	2505H	JLG	12 x 16.5 - 12	850	324	34 x 12 x 20	860	305	2000 kg /26 km/h
Telehandler	3507H	JLG	405/70 - 24	1085	405	42 x 16 x 24	1075	405	2600 kg / 32 km/h
Telehandler	3706PS , 3707PS , 4014PS	JLG	15.5/80 - 24	1270	406	14.00 - 24	1320	390	2500 kg / 32 km/h
Telehandler	4017PS , SJ1044 TH , SJ1056 TH , SJ1256 THS	JLG , SKYJACK	14.00 - 24	1346	361	14.00 - 24	1320	323	4000 kg / 32 km/h
Telescopic Booms	S-60 , S-65 , S-65 , S-60 X , S-60 XC	Genie	355/55D 625	947	350	38 x 14 x 24	970	350	454 kg / 4.8 km/h
Telescopic Booms	S-80 , S-85 , SJ82 T , SJ86 T	Genie, SKYJACK	18 - 625	1036	457	40 x 16 x 25	1015	457	454 kg / 4.8 km/h
Telescopic Booms	SX-105	Genie	385/75 D 22.5	1149	385	355/85-24 , 48.5x14-24	1216	377	454 kg /4.9 km/h
Articulating Booms	Z-40/23N , Z-40/23N RJ	Genie	--------			F-22 x 7x17 3/4, R-7.00 -12	559/645	178/160	227 kg / 7.2 km/h
Articulating Booms	Z-33/18	Genie	---------			22 x 9 - 17 (NM COW)	559	229	200 kg /5.2 km/h
Articulating Booms	Z-30/20N , Z-30/20N RJ , Z-34/22N	Genie	---------			22 x 7 x 17 3/4	559	178	227 kg / 4.8 km/h
Articulating Booms	Z-80/60 , SJ85 AJ	Genie, SKYJACK	18 - 625	1036	457	40 x 16 x 25	1015	457	227 kg /4.83 km/h
Trailer-Mounted Z-Booms	TZ-34/20	Genie	205/75 R15	688	205	27 x 8.5 x 15	675	280	227 kg Towing speed rate (97 km/h)
Trailer-Mounted Z-Booms	TZ-50	Genie	225/75 R15	718	225	2.50 - 15 (250/70-15)	706	220	227 kg / 1.37 km/h Towing speed rate (97 km/h)
Scissor Lifts	GS-1530 , GS-1930	Genie	--------			12 x 4.5 NM	305	114	272 kg /4.0 km/h
Scissor Lifts	GS-2669 DC, GS-3369 DC, GS-4069 DC, GS-2669 RT, GS-3369 RT, GS-4069 RT	Genie	12 x 26 NM	660	225	27 x 10 - 12	660	225	680 kg / 7.2 km/h
Scissor Lifts	GS-3384 RT , SJ8831 RT & SJ8841 RT, SJ9250 RT	Genie, SKYJACK	10 x 31 (10 x 16.5)	775	267	31 x 10 x 20	807	255	1250 kg / 6.4 km/h
AERIALWORK PLATFORMS	AWP-20S, AWP-25S , AWP-30S, AWP-36S, AWP-40S, DPL-25S, DPL-30S, DPL-35S, IWP-20S, IWP-25S , IWP-30S	Genie	10 NM	254	127	10 x 5 COW	254	127	230kg / 5kmh
Vertical Mast Lifts	GR-12 , GR-15 , GR-20, GR-26J, GRC-12 ,QS-12 , QS-15, QS-20	Genie	10 NM	254	127	10 x 5 COW	254	127	230kg / 5kmh
Vertical Mast Lifts	SJ12 , SJ16	Skyjack	-------			12 x 4 x 8 NM	305	102	227 kg 4.0 km/h
Dc Electric Scissors	SJIII 3215 , SJIII 3219	Skyjack	--------			12 x 4 x 8 NM	305	102	272 kg 3.2 km/h
Dc Electric Scissors	SJIII 3220 , SJIII 3226 , SJIII 4626 , SJIII 4632 , SJIII 4740	Skyjack	-------			16 x 5 x 12 NM	406	127	408 kg /3.9 km/h
Rough Terrain Scissors	SJ6826 RT , SJ6832 RT , SJ6832 RTE	Skyjack	-------			26 x 12 COW	660	305	567 kg /6.1 km/h
Articulating Booms	SJ30 AJE/ARJE	Skyjack	-------			22 x 7 x 12 NM	559	178	227 kg / 4.8 km/h
Articulating Booms	SJ46 AJ	Skyjack	12 x 16.5	850	324	34 x 12 x 20	860	305	227 kg /7.7 km/h
Telescopic Booms	SJ61 T , SJ66 T	Skyjack	15 x 19.5	1035	400	40 x 14 x 20	1015	350	227 kg /7.2 km/h
Telehandlers	SJ643 TH , SJ843 TH	Skyjack	13.00 x 24	1270	330	13.00 x 24	1270	330	2,722 kg /27 km/h
Telehandlers	ZB2044	Skyjack	17.5 x 25	1346	444	17.5 x 25	1346	444	3,175 kg /33 kph
Boom Lifts	AMZ131XT	Grove Manlift	14.75/80R20	1087	350	385/65 - 24	1066	370	230 kg / 6.5kmh

WARRANTY					
QUALITY	WORKING HOURS PER DAY	NO. OF MONTHS	TOTAL HOURS	FLOOR CONDITION	APPLICATION
STANDARD	8 Hrs	6 MONTHS	1440	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
PREMIUM	15 Hrs	6 MONTHS	2700	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
HEAVY DUTY	18 Hrs	6 MONTHS	3240	ROUGH FLOOR	HARD APPLICATION
HEAVY DUTY HEAT RESISTANTS (HDHR)	20 Hrs	6 MONTHS	3600	ROUGH FLOOR	HOT APPLICATION
CUT AND CHIP RESISTANTS (CCR)	20 Hrs	3 MONTHS	1800	ROUGH FLOOR	SCRAP YARD, STEEL & MINING APPLICATION
FIRE RESISTANTS (FR)	20 Hrs	3 MONTHS	1800	FIRE AREAS	STEEL, FURNACE & UNDER GROUND MINING APPLICATION

SOLIDO

Road Construction Equipment Tyres





ROLLER



CONCRETE MIXER



ROAD MILLING



GRADER



DUMPER

Types of Equipment	Model No	Equipment Manufacturer	Pneumatic tyre			Solid Tyre			Load carrying capacity 25km/hr
			Size	OD	Width	Size	OD	Width	
Concrete Mixer ,	ARGO 1000 , DX 25 SL	Ajax-Fiori	10.0 / 75 - 15.3 - 18 PR	780	274	30 x 10 x 20	760	255	1700 Litre/15 Kmph
Self loading Site Dumper,	ARGO 2000 , D 65	Ajax-Fiori	12.0 / 75 - 18 - 12 PR	915	299	36 x 12 x 20	915	305	2730 Litre/15 Kmph
Tunnel Dumper	ARGO 4000 , D 90 Maxi	Ajax-Fiori	16.0 / 70 - 20 - 14 PR	1128	405	48.5 x 14 - 24 (355/85-24)	1216	377	5300 Litre/30 Kmph
Articulated Site Dumper	DX 20	Ajax-Fiori	7.50 x 16 - 8 PR	805	190	750 x 16	794	210	1480 Litre/20 Kmph
MOTOR GRADERS	120K2 , 120K , GD511A-1, GD535-5 , G710 , G710 VHP , G716 VHP , G710B	CATERPILLAR, Komatsu, VOLVO	13.00 - 24 -12PR	1277	332	13.00 - 24	1300	315	47.5 km/h
	140K2 , 12K , 140K , 160K , 120M2 AWD , 670G/GP , 672G/GP , 770G/GP , 772G/GP , 870G/GP , GD555-5 , GD655-5 , GD663A-2 , 785XL-2, G720 / G720 VHP , G726 VHP , G730 / G730 VHP , G736 VHP , G740 / G740 VHP , G720B , G726B , G730B , G740B , G7468 , G930, G940G946, G960	CATERPILLAR , JOHN DEERE, Komatsu, Leeboy, VOLVO	14.00 - 24 -12PR	1335	364	14.00 - 24	1320	390	47.3 km/h
	120M2 , GD675-5	CATERPILLAR, Komatsu	17.5 R 25	1340	448	17.50 - 25	1340	440	45.7 km/h
	16M3 , 18M3 , GD825A-2	CATERPILLAR, Komatsu	23.5 R 25	1612	599	23.50 x 25	1650	575	51.7 km/h
	24 (2018)	CATERPILLAR	29.5 R 29	1854	762	29.50 - 25	1860	740	
	GD705-5 , GD755-5R , G780 / G780 VHP , G780B	Komatsu, VOLVO	16.00 - 24	1450	430	16.00 - 25	1500	430	
	685C , 695 , G-700 , G80 , G86	Leeboy, VOLVO	15 x 19.5	1035	400	40 x 14 x 20	1015	350	
	G60 , G66	VOLVO	15x19.5 (Front)16.9x24 (Rear)	1035 (Front) 1333 (Rear)	400 (Front) 429 (Rear)	40x14x20 (Front)17.50-25 (Rear)	1015 (Front) 1340 (Rear)	350 (Front) 440 (Rear)	
Road Milling Machine	W 35 Ri	Wirtgen				(20 x10) 500 x 250 (Front) (16 x 5) 405 x 130 (Rear)	500 (Front) 405 (Rear)	250 (Front) 130 (Rear)	6 km/h
	W 50 R , W 50 Ri , W 60 R , W 60 Ri	Wirtgen				(21x12) 530 x 300 (Front) (22x10) 559 x 254 (Rear)	530 (Front) 254 (Rear)	300 (Front) 254 (Rear)	12 km/h
	W 50 H , W 55 H	Wirtgen				(22 x 7) 559 x178 (Front) (22 x10) 559 x 254 (Rear)	559 (Front) 559 (Rear)	178 (Front) 254 (Rear)	8 km/h
	W 100 R , W 100 Ri , W 120 R , W 120 Ri , W 100 H , W 130 H	Wirtgen				(24x9) 620 x 230 (Front) (24x10) 620 x 255 (Rear)	620 (Front) 620 (Rear)	230 (Front) 255 (Rear)	7.5 km/h
Tyred Roller (PTR)		Kawasaki	13 / 80 - R 20	1046	348	13 / 80 - 20	1046	348	
		CAT	8.5 / 90 - 15	785	220	7.50 - 16	794	210	
		AMMAN	7.5 x 15-12 /14Ply	785	215	7.50 - 16	794	210	
		SinoWay	14 / 70 X 20	960	360	14/70 x 20	940	380	
		SANY	9.00 - 20 10 Ply	1015	255	10.00 - 20	1000	258	
		HAMM	10.5 /80-16	812	263	355/50 - 20	810	285	
		SAKAI	11.00 X 20	1080	290	12.00 - 20	1080	255	
		VOLVO	9.5 / 65 - 15	673	235	8.15-15 (28 x9-15)	690	218	
		Dynapac	12.00 - 16	1020	315	12.00 - 24	1180	288	
		Dynapac	10.00 - 20	1051	254	10.00 - 20	1000	258	
		Kawasaki	15.00 - 20	978	365	15.00 - 20	960	350	
		Dynapac	12.00 - 20	1131	311	12.00 - 24	1180	288	
Asphalt Pavers		BOMBAG	Rear - 15.5 R 25	1277	394	R- 8.5x14-24(355/85-24)/ F-22x 14x16	R-1216 F-559	R- 377 F- 356	
	RP 170E	ROADTEC	12 X 22	305	559	12 X 22	305	559	
	AFW 270	AMMAN	265 X 70- R 17.5	805	272	355/50 - 20	810	285	
	AFW 500	AMMAN	17.5 - R 25	1340	448	17.50 - 25	1340	440	
	AP 600 D	CAT	16.00 x 25	1525	406	R-16.00x25/ F-559x330(22X13)	R-1500 F-559	R-430 F-330	
	6150, 161C	Leeboy	Rear -385/65 R 22.5	1066	370	R-385/65-24/ F-12x22(304x558)	R-1066 F-304	R-370 F-558	7.5km/h
	P4370B	VOLVO	Rear -14 x 25 - 20 -PR	1368	375	R-14x25/F- 580	R-1320 F-23	R-390 F-23	14km/h
	ESP -045, HAP-045 with Hydraulic Drive & Conveyor System	UNIPAVE	Rear -12.00 x 20	1131	311	R-12.00-24/ F-550x175(22 x 7)	R-1180 F-550	R-288 F-175	19km/h
	ESP -05	UNIPAVE	Rear -10.00 x 20	1050	254	R-10.00-20/ F-550x175(22x 7)	R-1000 F-550	R-258 F-175	16km/h
	ESP -075	UNIPAVE	Rear -12.00 x 20	1131	311	R-12.00-24/ F-550x275(22x11)	R-1180 F-550	R-288 F-275	16km/h
	HAP-045, HAP-045 Hydraulic Conveyor Drive, UAP-045, ESP-03, VM-45, VM-45 with hydraulic drive for conveyor, UAP-04	UNIPAVE , Uniter	Rear -11.00 x 20	1080	290	R-12.00-20/ F-550x175(22x7)	R-1080 F-550	R-255 F-175	16km/h
	UWM-05 , VP-05 , WP-05	UNIPAVE , Uniter	Rear -10.00 x 20	1050	254	R-10.00 -20/ F- 550x175(22x7)	R-1000 F-550	R-258 F-175	16km/h
	SPF - 45	Speedcrafts	Rear -10.00 x 20	1050	254	R-10.00-20/ F-560x405x150(22x16x6)	R-1000 F-560	R-258 F-405	16km/h
	AP 1000 B	CAT	18.00 - 25	1675	457	R-18.00x25/ F-559x409(22x16)	R-1540 F-559	R-490 F-409	
	AP 300 D	CAT	365/85 R 20	1189	388	R-48.5x14-24/ F-455x260(18x10)	R-1216 F-455	R-377 F-260	

SOLIDO

SOLID SKID STEER





FRONT LOADER



AUGER



SNOW PLOW



TRENCHER



HAMMER



TELEHANDLER

WARRANTY					
QUALITY	WORKING HOURS PER DAY	NO. OF MONTHS	TOTAL HOURS	FLOOR CONDITION	APPLICATION
STANDARD	8 Hrs	6 MONTHS	1440	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
PREMIUM	15 Hrs	6 MONTHS	2700	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
HEAVY DUTY	18 Hrs	6 MONTHS	3240	ROUGH FLOOR	HARD APPLICATION
HEAVY DUTY HEAT RESISTANTS (HDHR)	20 Hrs	6 MONTHS	3600	ROUGH FLOOR	HOT APPLICATION
CUT AND CHIP RESISTANTS (CCR)	20 Hrs	3 MONTHS	1800	ROUGH FLOOR	SCRAP YARD, STEEL & MINING APPLICATION
FIRE RESISTANTS (FR)	20 Hrs	3 MONTHS	1800	FIRE AREAS	STEEL, FURNACE & UNDER GROUND MINING APPLICATION

Tyre Size	Rim Size (Metric)	Tyre Dimensions in mm		Load Capacity (kg)					
		Outer Dia	Side wall Width	Counter balanced lift trucks 25km/h		Other Vehicles			Equivalent Pneumatic Tyre Size
				Load Wheel	Steer Wheel	6 km/h	10 km/h	25 km/h	
5.70-12	4.00-12	570	146	2340	1900	2340	2125	1800	10 x 16.5
23 x 8.5-12	5.00-12	580	200	3445	2650	3445	3125	2650	10 x 16.5
27 x 8.5-15	5.50-15	675	200	3550	2900	3550	3320	3000	10 x 16.5
27 x 12-15	8.50-15	675	280	5525	4250	5525	5325	5150	10 x 16.5
750 x 16	550-16 & 600-16	794	210	3500	4200	4200	3750	3500	10 x 16.5
8.25 x 16	550-16	830	210	4600	5520	5520	4960	4600	12 x 16.5
9.00 x 16	7.50-16	975	240	4800	5600	5600	5200	4800	12 x 16.5
30 x 8 x 16	6.00-16	762	200	3965	3050	3965	3600	3050	10 x 16.5
30 x 9-16	6.00-16	760	240	3000	3600	3600	3240	3000	10 x 16.5
30 x 10 x 16	6.00-16	760	255	3000	3600	3600	3240	3000	10 x 16.5
30 x 10 x 18	6.00-18	760	255	3000	3600	3600	3240	3000	10 x 16.5
30 x 10 x 20	6.50-20	760	255	3000	3600	3600	3240	3000	10 x 16.5
31 x 10 x 16	6.00-16	807	255	2400	2900	2900	2750	2400	10 x 16.5
31 x 10-18	7.00-18	807	255	2400	2900	2900	2750	2400	10 x 16.5
31 x 10 x 20	7.00-20	807	255	2400	2900	2900	2750	2400	10 x 16.5
32 x 10-20	7.00-20	820	255	2500	3000	3000	2800	2600	12 x 16.5
33 x 12 x 16	8.00-16	826	280	2400	2900	2900	2750	2400	12 x 16.5
33 x 15-16	11.25-16	826	374	5600	5900	5600	5850	5400	12 x 16.5
33 x 12 x 20	7.50-20	826	305	4900	5850	5850	5290	4900	12 x 16.5
34 x 10 x 20	7.00-20	860	255	4500	5400	5400	4950	4650	12 x 16.5
34 x 12 x 20	8.00-20	860	305	5200	6100	6100	5700	5450	12 x 16.5
36 x 12 x 20	8.00-20	915	305	4200	5040	5040	4530	4200	14 x 17.5
36 x 12 x 20	8.00-20	915	305	4200	5040	5040	4530	4200	15-19.5
385/65D-20	8.00-20	915	305	4200	5040	5040	4530	4200	385/65D-19.5
36 x 14 x 20	11.00-20	915	350	4200	5040	5040	4530	4200	14 x 17.5
15.00 x 20	11.00-20	965	345	4400	5240	5240	4780	4400	14 x 17.5
15.00 x 20	11.00-20	965	345	4400	5240	5240	4780	4400	355/70D-17.5
38 x 14-20	11.00-20	970	350	5200	5600	5200	5300	5200	14 x 17.5
40 x 14 x 20	11.00-20	1015	350	6200	6900	6900	6500	4955	15 x 19.5
18.00 x 20	12.00-20	1060	430	6800	7500	7500	7300	5755	18-19.5
13.00 x 24	8.50 x 24/9.00-24	1300	315	6350	7700	7700	7000	6350	13.00 x 24
14.00 x 24	10.00 x 24	1320	390	14000	16800	16800	15120	14000	14.00 x 24
14.00 x 25	10.00 x 25/11.25 x 25	1320	390	14000	16800	16800	15120	14000	14.00 x 24




GRAPPLE ATTACHED



BROOM ATTACHED

SOLIDO

OTR Tyres

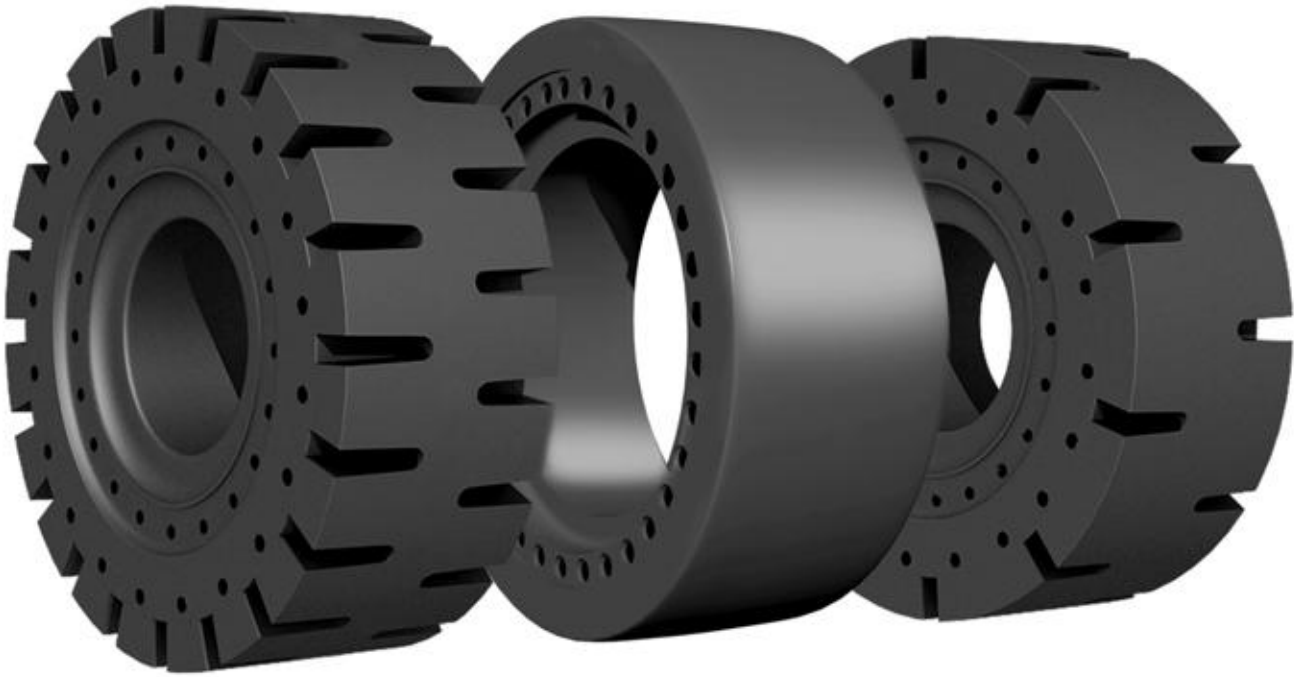



GRADER



MOBILE CRANE



FRONT LOADER



WHEEL LOADER



BACKHOE LOADER



DUMPER

Our "SOLIDO" brand solid otr tyres suitable for below major manufacturers.

CAT , VOLVO , KOMATSU , JCB , DOOSAN , BOBCAT , JOHN DEERE , KUBOTA , BECO, L&T , KAWASAKI , SDLG , CATERPILLER , COYOTE LOADERS , LIEBHERR , TEREX , CASE , NEW HOLLAND , MUSTANG , THOMAS GEHL , BOMAG , KOBELCO, KALMAR , SENNEBOGEN, HINDUSTAN , HECON, KRESS , TOMAC, LEEBOY, BEML, KAMAG, LIUGONG, KIROW, SANY, etc.

SOLID OTR SPECIFICATION								
TYRE SIZE	RIM SIZE	TYRE DIMENSIONS		LOAD CAPACITY				
		OUTER DIAMETER	TYRE WIDTH	STEERING WHEELS Kg	LOAD WHEELS Kg	6 Km/h	10 Km/h	25 Km/h
12.00 - 20	8.00"x20"&8.50"x20"&10.00"x20"	1080 mm	255 mm	6300	7560	7560	6865	6300
12.00 - 24	8.50" x 24" & 9.00" x 24"	1210 mm	300 mm	7500	9500	9500	8500	7500
13.00 - 24	8.50" x 24" & 9.00" x 24"	1300 mm	315 mm	6350	7700	7700	7000	6350
14.00 - 20	10.00"x20"	1320 mm	390 mm	14000	16800	16800	15120	14000
14.00 - 24	10.00"x24"	1320 mm	390 mm	14000	16800	16800	15120	14000
14.00 - 25	10.00" x 25" & 11.25" x 25"	1320 mm	390 mm	14000	16800	16800	15120	14000
16.00 x 25	11.25" x 25"	1500 mm	430 mm	7000	8800	8800	7800	7000
17.50 - 25	14.00" x 25"	1340 mm	440 mm	8000	9800	9800	8800	8000
18.00 x 25	13.00" x 25"	1540 mm	490 mm	8500	10300	10300	9300	8500
20.50 - 25	17.00" x 25"	1450 mm	495 mm	9000	10890	10890	9900	9000
23.50 - 25	19.50" x 25"	1650 mm	575 mm	10000	12100	12100	11000	10000
26.50 - 25	22.00" x 25"	1730 mm	635 mm	15000	18150	18150	16500	15000
29.50 - 25	25.00" x 25"	1860 mm	740 mm	22500	27000	27000	24300	22500
35/65 - 33	28.00" x 33"	2030mm	850 mm	26000	31200	31200	28080	26000

WARRANTY					
QUALITY	WORKING HOURS PER DAY	NO. OF MONTHS	TOTAL HOURS	FLOOR CONDITION	APPLICATION
STANDARD	8 Hrs	6 MONTHS	1440	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
PREMIUM	15 Hrs	6 MONTHS	2700	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
HEAVY DUTY	18 Hrs	6 MONTHS	3240	ROUGH FLOOR	HARD APPLICATION
HEAVY DUTY HEAT RESISTANTS (HDHR)	20 Hrs	6 MONTHS	3600	ROUGH FLOOR	HOT APPLICATION
CUT AND CHIP RESISTANTS (CCR)	20 Hrs	3 MONTHS	1800	ROUGH FLOOR	SCRAP YARD, STEEL & MINING APPLICATION
FIRE RESISTANTS (FR)	20 Hrs	3 MONTHS	1800	FIRE AREAS	STEEL, FURNACE & UNDER GROUND MINING APPLICATION

"SOLIDO" SOLID OTR TYRE SUITABLE APPLICATION:

1. Pattern suitable for dirt, ground, sand, mud, snow or quarry & mining, concrete, asphalt, cement, rock, scrap, debris, etc..,

2. Recycling industry

3. Waste management industry

4. Scrap handling industry

Our solid OTR tires are capable to replace pneumatic OTR tyres

SOLIDO

Under Ground Mining Tyres





UNDERGROUND
SCISSOR LIFT



MINING TRUCK



SCOOPTRAM



UNDERGROUND
DRILLING MACHINE



UNDERGROUND
BOOM LIFTER



ROOF SUPPORT CARRIER

SIZE (Inch)	OUTTER DIA (mm)	SECTION WIDTH (mm)	MAX LOAD (kg) 25km/h	PATTERN
47.5 x 11.8	1205	300	20500	LUG, RIB, TRACTION
59 x 18.5	1495	470	25300	LUG, RIB, TRACTION
56 x 22	1423	560	41200	LUG, RIB, TRACTION
44 x 20	1100	510	25300	LUG, RIB, TRACTION
48 x 22	1205	560	26500	LUG, RIB, TRACTION
53 x 28	1350	710	45800	LUG, RIB, TRACTION
53 x 22	1350	560	35300	LUG, RIB, TRACTION
53 x 25	1350	635	36500	LUG, RIB, TRACTION
53 x 26	1350	660	37100	LUG, RIB, TRACTION
55 x 28	1400	710	37600	LUG, RIB, TRACTION
60 x 18.5	1516	470	38000	LUG, RIB, TRACTION
63 x 18	1600	455	38400	LUG, RIB, TRACTION
66 x 26.5	1680	675	39000	LUG, RIB, TRACTION
69 x 18	1750	455	39500	LUG, RIB, TRACTION
69 x22.5	1750	567	40500	LUG, RIB, TRACTION
69 x 23.5	1750	600	42300	LUG, RIB, TRACTION

We manufacture solid wheels for the following machines:

Caterpillar SH660 LHD

Caterpillar SH640 LHD

Caterpillar SH150 Chock Trailer

Sandvik TS490 LHD

Sandvik ED40 LHD

Sandvik 50 tonne trailer

Bucyrus MH40 LHD

Eimco 936 LHD

37 tonne Chock trailer

Scaler

Under ground mining scissor lift

Scooptram

Shotcreter

Shuttle Car

Transmixer

Water truck (Giant mining type)

Load haul dumper

Telescopic handler

Boom lifter

We designs and manufactures solid wheels specifically to suit customers' equipment.

SOLIDO

PRESS-ON-BAND‘S





4 WHEEL ELECTRIC TRUCKS



3 WHEEL ELECTRIC TRUCKS



AERIAL WORK PLATFORMS



VERY NARROW AISLE TRUCKS



INDUSTRIAL TRAILER

Tyre Size's		Load Capacity in Kg										
		Counter Balanced Lifting Equipment						Other Vehicles				
Inch	mm	10 Km/h		16 Km/h		20 Km/h						
		Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	6 Km/h	10Km/h	16 Km/h	20 Km/h	Trailer
8 ½ x4x4	216-102-101.6	700	575	625	525	525	415	750	550	500	375	750
9x5x5	229-127-127.0	960	790	855	720	720	570	1030	755	685	515	1030
10½x5x6 ½	267-127-165.1	1075	885	960	810	810	640	1155	845	770	575	1155
10½x6x6 ½	267-152-165.1	1335	1095	1190	1000	1000	795	1430	1050	955	715	1430
10½x7x6 ½	267-178-165.1	1600	1315	1430	1200	1165	955	1715	1260	1145	860	1715
10x4x6 ½	254-127-165.1	780	640	695	585	585	465	835	610	555	415	835
10x4x6 1/4	254-102-158.8	785	615	700	590	590	465	840	615	560	420	840
10x5x6 ½	254-127-165.1	1015	835	905	760	760	605	1085	795	725	545	1085
10x5x6 1/4	254-127-158.8	1025	845	915	770	770	610	1100	805	735	550	1100
10x6x6 1/4	254-152-158.8	1265	1040	1130	950	950	755	1360	995	905	680	1360
12x4½x8	305-114-203.2	1040	855	930	780	780	620	1115	820	745	560	1115
12x4x8	305-102-203.2	905	745	810	680	680	540	970	710	645	485	970
12x5½x8	305-140-203.2	1340	1100	1195	1005	1005	795	1435	1050	955	715	1435
12x5x8	305-127-203.2	1190	975	1060	890	890	710	1275	935	850	635	1275
12x6½x8	305-165-203.2	1620	1330	1450	1215	1215	965	1740	1275	1160	870	1740
13½x4½x8	343-114-203.2	1145	940	1020	860	860	680	1225	900	820	615	1225
13½x5½x8	343-140-203.2	1510	1240	1350	1135	1135	900	1620	1185	1080	810	1620
13x3½x8	330-89-203.2	870	715	775	645	645		1030	680	60	470	1030
13x4½x8	330-114-203.2	1115	920	995	840	840	665	1195	880	800	600	1195
13x5x8	330-127-203.2	1290	1060	1150	965	965	765	1380	1010	920	690	1380
14x4½x8	356-114-203.2	1165	955	1040	875	875	695	1250	915	830	625	1250
14x5x10	356-127-254.0	1335	1100	1195	1000	1000	795	1430	1050	955	715	1430
15½x5x10	394-127-254.0	1475	1210	1315	1105	875	1580	1580	1155	1050	790	1580
15½x6x10	394-152-254.0	1865	1530	1665	1395	1395	1110	1995	1465	1330	1000	1995
15x4x11 1/4	381-102-285.8	1065	875	950	800	775	635	1140	835	760	570	1140
15x5x11 1/4	381-127-285.8	1390	1145	1240	1045	1045	830	1490	1095	995	745	1490
15x6x11 1/4	381-152-285.8	1720	1410	1535	1290	1290	1025	1840	1350	1225	920	1840
16 1/4x5x11 1/4	413-127-285.8	1525	1250	1360	1145	1145	905	1635	1200	1090	815	1635
16 1/4x6x11 1/4	413-152-285.8	1915	1570	1710	1435	1435	1140	2050	1505	1365	1025	2050
16 1/4x7x11 1/4	413-178-285.8	2320	1905	2070	1740	1740	1380	2485	1820	1655	1245	2485
16 1/4x8x11 1/4	413-203-285.8	2710	2225	2420	2030	2030	1615	2905	2130	1935	1450	2905
16x5x10 ½	406-127-266.7	1505	1240	1345	1130	1130	895	1615	1185	1075	805	1615
16x6x10 ½	406-152-266.7	1905	1565	1700	1430	1430	1135	2040	1495	1360	1020	2040
16x7x10 ½	406-178-266.7	2320	1905	2070	1740	1740	1380	2485	1820	1655	1245	2485
17x5x12 1/8	432-127-308.0	1575	1295	1405	1180	1180	940	1690	1240	1125	845	1690
17x6x12 1/8	432-152-308.0	1975	1620	1765	1480	1480	1175	2115	1550	1410	1060	2115
18x5x12 1/8	457-127-308.0	1640	1350	1465	1230	1230	980	1760	1290	1175	880	1760
18x6x12 1/8	457-152-308.0	2090	1715	1865	1565	1565	1245	2240	1640	1490	1120	2240
18x7x12 1/8	457-178-308.0	2555	2100	2280	1915	1915	1520	2735	2005	1825	1370	2735
18x8x12 1/8	457-203-308.0	3000	2456	2680	2250	2250	1785	3215	2355	2145	1605	3215
18x9x12 1/8	457-228-308.0	3465	2845	3095	2600	2600	2060	3710	2720	2475	1855	3710
20x8x15	508-203-381.0	3165	2600	2825	2375	2375	1885	3390	2485	2260	1695	3390
20x8x16	508-203-406.4	3010	2470	2685	2255	2255	1790	3225	2365	2150	1610	3225
20x9x15	508-229-381.0	3635	2985	3245	2725	2725	2165	3895	2855	2600	1950	3895
20x9x16	508-229-406.4	3445	2830	3075	2580	2580	2050	3690	2705	2460	1845	3690
21x5x15	533-127-381.0	1840	1510	1645	1380	1380	1095	1970	1445	1315	985	1970
21x6x15	533-152-381.0	2345	1925	2095	1760	1760	1395	2515	1845	1675	1255	2515
21x7x15	533-178-381.0	2870	2360	2565	2155	2155	1710	3075	2255	2050	1540	3075
21x8x15	533-203-381.0	3375	2775	3015	2530	2530	2010	3620	2655	2410	1810	3620
21x9x15	533-229-381.0	3900	3205	3485	2925	2925	2320	4180	3065	2785	2090	4180
22x10x16	559-254-406.4	4570	3755	4080	3430	3430	2720	4895	3590	3265	2450	4895
22x12x16	559-305-406.4	5640	4635	5035	4230	4230	3355	6045	4430	4030	3020	6045
22x12x17 3/4	559-305-451.0	5155	4235	4600	3865	3865	3070	5520	4050	3680	2760	5520
22x14x16	559-356-406.4	6710	5510	5990	5030	5030	3995	7190	5270	4795	3595	7190
22x16x16	559-406-406.4	7760	6375	6925	5820	5820	4620	8315	6095	5540	4155	8315
22x6x16	559-152-406.4	2430	1995	2170	1825	1825	1445	2605	1910	1735	1300	2605
22x6x17 3/4	559-152-451.0	2345	1930	2095	1760	1760	1395	2515	1845	1675	1255	2515
22x7x16	559-178-406.4	2975	2445	2660	2230	2230	1770	3190	2340	2125	1595	3190
22x7x17 3/4	559-178-451.0	2825	2320	2520	2120	2120	1680	3025	2220	2015	1515	3025
22x8x16	559-203-406.4	3500	2875	3125	2625	2625	2085	3750	2750	2500	1875	3750
22x8x17 3/4	559-203-451.0	3285	2695	2930	2460	2460	1955	3515	2580	2345	1760	3515
22x9x16	559-229-406.4	4045	3325	3615	3035	3035	2140	4335	3180	2890	2170	4335
26x6x20	660-152-508.0	2755	2260	2460	2065	2065	1640	2950	2165	1965	1475	2950
26x7x20	660-178-508.0	3370	2770	3010	2530	2530	2005	3610	2650	2405	1805	3610
26x8x20	660-203-508.0	3965	3255	3540	2970	2880	2360	4245	3115	2830	2125	4245
28x10x22	711-254-559.0	5470	4495	4885	4105	4105	3255	5860	4300	3905	2930	5860
28x12x22	711-305-559.0	6750	5545	6025	5060	5060	4015	4230	5305	4820	3615	7230
28x14x22	711-356-559.0	8030	6595	7170	6020	6020	4780	8600	6310	5735	4300	8600
28x16x22	711-406-559.0	9280	7625	8290	6960	6960	5525	9945	7295	6630	4975	9945
40x12x30	1016-305-762.0	8760	7165	7620	6255	6255	5005	9100	6485	5685	4550	9100
40x14x30	1016-356-762.0	10610	8680	9230	7575	7575	6060	11020	7850	6890	5510	11020
40x16x30	1016-406-762.0	12420	10160	10850	8870	8870	7095	12905	9195	8065	6450	12905
40vx20x30	1016-508-762.0	16120	13190	14025	11515	11515	9210	16745	11930	10465	8375	16745

Tyre Size's		Load Capacity in Kg										
		Counter Balanced Lifting Equipment						Other Vehicles				
		10 Km/h		16 Km/h		20 Km/h						
Inch	mm	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	6 Km/h	10 Km/h	16 Km/h	20 Km/h	Trailer
	125x50x75	578	470	502	419	419	343	520	425	365	254	520
	150x130x100	585	480	525	440	424	347	600	480	360	300	600
	150x50x100	250	203	217	181	181	148	225	180	160	110	225
	150x75x100	417	339	362	302	302	247	375	300	230	190	375
	160x50x100	278	226	242	201	201	165	250	200	170	122	250
	170x75x100	472	384	411	342	342	280	425	340	260	210	425
	180x50x120	361	294	314	262	262	214	325	260	185	140	325
	180x75x120	528	429	459	382	382	313	475	380	290	240	475
	200x130x105	880	725	785	660	638	523	750	600	450	380	750
	200x50x140	389	316	338	282	282	231	350	280	206	171	350
	200x75x100	556	452	483	403	403	330	500	400	300	250	500
	200x85x105	611	497	531	443	443	363	550	440	330	280	550
	220x60x160	500	407	435	362	362	297	450	360	270	230	450
	220x70x150	611	497	531	443	443	363	550	440	330	280	550
	230x50x170	444	361	386	322	322	264	400	320	235	195	400
	230x75x120	611	497	531	443	443	363	550	440	330	280	550
	230x75x170	694	565	604	503	503	412	625	500	380	310	625
	230x85x170	772	628	671	560	560	459	695	560	420	340	695
	250x100x140	765	625	680	575	554	454	695	555	425	355	695
	250x100x190	690	565	615	520	500	410	875	7000	535	435	875
	250x105x170	785	645	700	590	569	466	845	640	510	420	845
	250x100x170	740	610	660	555	536	440	800	620	480	400	800
	250x130x140	1065	780	590	490	772	633	975	780	590	490	975
	250x50x190	500	407	435	362	362	297	450	360	270	230	450
	250x60x190	583	474	507	423	423	346	525	420	320	260	525
	250x75x140	694	565	604	503	503	412	625	500	380	310	625
	250x80x170	750	610	652	543	543	445	675	540	410	340	675
	250x85x190	828	673	720	600	600	492	745	595	455	370	745
	250x90x150	744	605	647	539	539	442	670	545	395	285	670
	250x90x170	844	687	734	612	612	502	760	605	460	380	760
	260x105x170	825	675	735	615	598	490	875	700	530	440	875
	260x130x170	4065	875	950	795	2946	2414	1050	840	630	520	1050
	260x60x170	583	474	507	423	423	346	525	420	320	260	525
	260x85x170	861	700	749	624	624	511	775	620	465	390	775
	265x160x160	1420	1165	1265	1065	1029	843	1150	920	690	580	1150
	265x85x190	690	570	620	515	500	410	825	540	495	425	825
	270x100x120	780	600	450	380	565	463	750	600	450	380	750
	270x105x170	855	705	765	640	620	508	900	720	540	450	900
	285x100x203	820	675	730	615	594	487	960	765	575	480	960
	285x50x220	435	380	275	190	315	258	525	420	320	260	525
	285x75x220	595	490	530	445	431	353	710	465	425	350	710
	290x105x185	905	745	810	680	656	538	950	770	580	490	950
	300x100x230	825	680	735	620	598	490	890	710	530	440	890
	300x120x203	1044	858	930	780	757	620	1150	930	708	588	1150
	300x100x203	870	715	775	650	630	517	975	780	590	490	975
	300x90x203	835	685	745	625	605	496	995	655	600	450	995
	310x120x200	1135	930	1010	850	822	674	1080	900	650	550	1080
	310x120x220	1100	905	985	830	797	653	1050	840	630	530	1050
	310x60x220	722	587	628	523	523	429	650	520	390	330	650
	313x130x203	1260	1035	1125	945	913	748	1150	920	690	580	1150
	330x120x220	1180	975	1060	890	855	701	1100	880	660	550	1100
	340x60x250	750	610	652	543	543	445	675	540	410	340	675
	343x114x225	1150	945	1025	860	833	683	1090	870	650	540	1090
	350x90x280	895	740	800	665	649	532	1065	700	640	500	1065
	360x60x270	550	450	490	410	399	327	650	430	395	320	650
	360x75x270	1056	858	918	765	765	627	950	760	570	430	950
	360x85x270	890	730	795	665	645	529	1060	700	635	560	1060
	450x120x300	1650	1355	1475	1235	1196	980	1710	1295	1180	960	1710
	460x135x300	1790	1470	1600	1340	1297	1063	1820	1405	1280	1080	1820
	400x60x305	1133	921	986	821	821	673	1020	820	715	498	1020
	405x130x305	1510	1240	1350	1135	1094	897	1350	1190	1080	950	1350
	405x260x305	3325	2730	2970	2495	2409	1975	3160	2610	2375	2050	3160
	405x65x305	1000	813	870	725	725	594	900	710	600	439	900
	300x75x240	625	515	560	465	453	371	740	490	445	390	740
	415x100x305	1115	915	995	835	808	665	1195	875	795	595	1195
	415x75x305	820	675	730	610	594	487	975	645	585	445	975
	415x90x305	1065	875	950	795	772	633	1265	835	760	575	1265
	425x96x305	1910	1570	1705	1435	1390	1135	2045	1500	1365	1025	2045

Tyre Size's		Load Capacity in Kg										
		Counter Balanced Lifting Equipment						Other Vehicles				
		10 Km/h		16 Km/h		20 Km/h						
Inch	mm	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	6 Km/h	10 Km/h	16 Km/h	20 Km/h	Trailer
	425x260x305	3625	2975	3235	2720	2630	2155	3885	2845	2590	1940	3885
	425x300x305	4245	3490	3790	3185	3085	2530	4550	3335	3035	2275	4550
	445x75x305							1050	840	630	530	
	445x75x335							1000	800	600	500	
	450x300x305	4640	3810	4145	3480				3650	3320		
	500x100x370	1270	1040	1135	955			1500	1200	900	750	
	500x140x370	2000	1640	1785	1500				1570	1430		
	500x280x370	4535	3725	4050	3405			4535	3725	3405	2700	
	500x85x370							1300	1050	780	650	
	510x65x410							1100	880	660	550	
	520x100x370	1275	1050	1140	955			1525	1225	920	760	
	520x120x370	1670	1370	1490	1255			1775	1420	1065	890	
	540x200x410	3270	2685	2920	2450	2375	3500	2570	2335	1750	3500	
	550x120x410	1750	1440	1565	1315	1270	1040	1875	1375	1250	940	1875
	550x150x370	2350	1930	2100	1760				1845	1680		
	550x160x410	2555	2095	2280	1915	1855	1520	2735	2005	1825	1370	2735
	560x100x410	1350	1110	1205	1015			1600	1275	960	800	
	610x100x410	1265	1040	1130	950			1675	1350	1000	840	
	610x150x410	2505	2055	2235	1880			2250	1800	1350	1125	
	620x200x410	3790	3110	3380	2840			3000	2400	1800	1500	
	630x180x410	3300	2710	2945	2475			2500	2000	1500	1250	
	645x220x410	4055	3320	3530	2895	2845	2315	4215	3000	2635	2105	4215
	645x200x480	3865	3175	3450	2900			3100	2475	1850	1550	
	645x250x410	4805	3935	4185	3435	3370	2745	4995	3560	3120	2495	4995
	645x300x410	6060	4960	5275	4330	4250	3465	6300	4485	3935	3150	6300
	645x350x410	7315	5985	6365	5225	5130	4180	7600	5415	4750	3800	7600
	660x203x480	3695	3025	3215	2640	2590	2110	3840	2735	2400	1920	3840
	660x250x480	4785	3915	4160	3415	3355	2735	4970	3540	3105	2485	4970
	660x280x480	5480	4480	4765	3915	3840	3130	5690	4055	3555	2845	5690
	705x180x485	3590	2950	3205	2695			2650	2125	1600	1325	
	710x200x485	4180	3435	3730	3135			2975	2375	1775	1500	
	760x250x500	5440	4450	4730	3885	3815	3110	5650	4025	3530	2825	5650
	760x250x500	5440	4450	4730	3885			3800	3050	2275	1900	
	760x265x500	5880	4810	5115	4200			4000	3200	2400	2000	
	780x200x555	4485	3685	4000	4485			3325	2650	2000	1675	
	790x150x555	2920	2400	2610	2190	2120	1735			2085		
	840x350x559	9100	7445	7920	6500	6380	5200	9455	6735	5910	4725	9455
	920x250x670											
	900x200x720	4580	3760	4090	3435				3600	3720		
	920x400x670											
	980x200x870											
	980x300x870											

✷✷ *Specifications are Subject to Change without notice.*



Dimensional tolerances as per E.T.R.T.O.

Nominal section width +4%

Nominal overall diameter +/- 1.5%

Nominal rim diameter +0.005"/ - 0"(designated sizes) H11 according to ISO 286-2

Nominal rim diameter (metric sizes) H11 according to ISO 286-2

SOLIDO

Ground Support Equipment (GSE) Tyres







AERIAL & MAINTENANCE PLATFORM LIFTS



CONVEYOR BELT LOADER



PUSH BACK TRACTORS



FORKLIFTS



BAGGAGE CARTS



BAGGAGE TOW TRACTORS



CONTAINER DALLY

Tyre Size	Tyre Size (Metric)	Rim Size	Tread	Tyre Dimensions in mm			Load Capacity (kg)					
							Counter balanced		Other Vehicles			STATIC 0 km/h
				Outer Dia	Side wall Width	Tread Width	Load Wheel	Steer Wheel	6 km/h	10 km/h	25 km/h	
4.00-4		2.10-4,2.50-4	LUG	300	92	84	535	410	535	485	410	620
3.50-5		3.00	RIB	298	101	90	520	400	520	470	400	605
	140/55-6	4.50	LUG	310	140	130	1075	825	1075	975	825	1245
4.00-6		2.50A-6	LUG	300	92	84	535	410	535	485	410	620
4.00-8		2.75, 3.00	LUG, RIB	402	103	93	950	730	950	860	730	1100
4.00-8		3.00D-8	RIB	410	113	103	950	730	730	860	730	1100
4.00-8		3.75	RIB	405	119	110	950	730	950	860	730	1100
12X3 1/2-8		3.00D-8	SM	308	98	87	850	650	850	700	625	950
	100/80-8	2.50A-8	SM	359	104	90	755	580	755	685	580	875
15X4X1/2-8	125/75-8	3.00D-8	LUG,SM	374	114	104	1040	800	1040	940	800	1210
5.00-8		3.00	LUG	450	114	104	1415	1090	1415	1285	1090	1645
5.00-8		3.75	RIB	450	114	104	1415	1090	1415	1285	1090	1645
17X7-8		4.33	SM	430	150	140	2000	1540	2000	1800	1700	2300
18X7-8	180/70-8	4.33	LUG, RIB	450	156	142	2145	1650	2145	1945	1650	2490
6.00-9		4.00	LUG	514	154	140	1885	1450	1885	1710	1450	2190
6.50-10		5.00, 5.50	LUG	566	160	150	2340	1800	2340	2125	1800	2720
7.50-10		5.00,5.50	LUG	631	180	170	3070	2360	3070	2785	2360	3565
7.00-12		5.00	LUG	645	175	150	2920	2240	2920	2645	2240	3380
23X5-13	150/100-13	3.75-13	LUG	621	146	136	1715	1320	1715	1560	1320	1995
28X9-15(8.15-15)	225/75-15	6.50, 7.00	LUG	690	218	280	3770	2900	3770	3420	2900	4380
3.00-15	315/70-15	8.00	LUG	809	258	248	5850	4500	5850	5650	5500	6300
	355/65-15	9.75-15	LUG	810	285	275	8970	6900	8970	8800	8670	9500
7.50-16		5.50, 6.00, 6.50	LUG	794	210	200	3965	3050	3965	3600	3050	4605
10.00-20		6.50, 7.00,8.00, 8.50	LUG	1000	258	203	5850	4875	5850	5315	4875	7360
PRESS- ON BAND												
12X5X8	905/127-203	8.00-5	LUG	1190	975	1060	890	710	1275	935	850	365
18X9X12 1/8	457/229-308	12 1/8-9	LUG	3465	3095	2600	2600	2060	3710	2720	2475	1855

WARRANTY					
QUALITY	WORKING HOURS PER DAY	NO. OF MONTHS	TOTAL HOURS	FLOOR CONDITION	APPLICATION
STANDARD	8 Hrs	6 MONTHS	1440	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
PREMIUM	15 Hrs	6 MONTHS	2700	SMOOTH FLOOR	INDUSTRIAL APPLICATION LIKE WARE HOUSE
HEAVY DUTY	18 Hrs	6 MONTHS	3240	ROUGH FLOOR	HARD APPLICATION
CUT AND CHIP RESISTANTS (CCR)	20 Hrs	3 MONTHS	1800	ROUGH FLOOR	SCRAP YARD, STEEL & MINING APPLICATION

SOLIDO

PASSENGER BOARDING BRIDGE (PBB) TYRES



Boarding Bridge (PBB) or Aero Bridge Tyre

We replace the passenger boarding bridge (PBB) tyres for the bridges manufactured by **Thyssenkrupp, FMC, Shinmaywa, Team, FMT, Aerotech, Bukaka, CIMC-TianDa** and many more.

Tyre Size's		Load Capacity in Kg										
		Counter Balanced Lifting Equipment						Other Vehicles				
		10 Km/h		16 Km/h		20 Km/h						
Inch	mm	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	6 Km/h	10 Km/h	16 Km/h	20 Km/h	Trailer
22x14x16	559-356-406.4	6710	5510	5990	5030	5030	3995	7190	5270	4795	3595	7190
28x10x22	711-254-559.0	5470	4495	4885	4105	4105	3215	5860	4300	3905	2930	5860
28x12x22	711-305-559.9	6750	5545	6025	5060	5060	4015	4230	5305	4820	3615	7230
28x16x22	711-406-559.0	9280	7625	8290	6960	6960	5525	9945	7295	6630	4975	9945
36x16x30	914-406-762.0	10610	8680	9230	7575	7575	6060	11020	7850	6890	5510	11020
40x16x30	1016-406-7620	12420	10160	10850	8870	8870	7095	12905	9195	8065	6450	12905

SOLIDO

Industrial Rims








RIM SIZE	TYRE SIZE	NO PCS	VEHICLE APPLICATIONS
2.50-8	4.00-8	2P	INDUSTRIAL TRAILER/ BATTERY FORKLIFT
3.00-8	4.00-8/5.00-8/ 15 x 4.5-8	2P	INDUSTRIAL TRAILER/ BATTERY FORKLIFT
3.25-8	4.00-8/5.00-8/ 15 x 4.5-8	2P	INDUSTRIAL TRAILER/ BATTERY FORKLIFT
3.50-8	5.00-8	2P	INDUSTRIAL TRAILER/ BATTERY FORKLIFT
3.75-8	4.00-8/ 5.00-8	2P	INDUSTRIAL TRAILER/ BATTERY FORKLIFT
4.33-8	18 x 7-8/ 16 x 6-8	2P/ 3P	FORKLIFT
4.00-9	6.00-9	2P/ 3P	FORKLIFT
5.00-10	6.50-10	2P/ 3P	FORKLIFT
6.50-10	23 x 8/9-10	2P/ 3P	FORKLIFT
5.00-12	7.00-12	2P/ 3P	FORKLIFT
8.00-12	23 x 10-12/ 27 x 10-12	3P/ 4P	FORKLIFT
6.50-15	8.25 x 15	3P/ 4P	FORKLIFT
7.00-15	8.15 x 15	3P/ 4P	FORKLIFT
9.75-15	355/ 50-20	3P/ 4P	FORKLIFT
6.00 x 16	7.50-16	2P/ 3P	BACKHOE LOADER
7.50 x 20	10.00-20	2P/ 3P	PICK & CARRY CRANE/ WHEEL LOADER/ EXCAVATOR
8.00 x 20	11.00-20	2P/ 3P	PICK & CARRY CRANE/ WHEEL LOADER/ EXCAVATOR
10.00-20	355/ 50-20	2P/ 3P	FORKLIFT/ SLAG POT CARRIER
13.00 x 20	16/70-20	2P/ 3P	CONCRETE MIXTURE/ENGINEERING VEHICLE
10.00/1.7-24	14.00-24	3P	MOTOR GRADER
10.00/1.5-25	14.00-25	3P	BACKHOE LOADER/ AIRPLANE TRACTER/ WHEEL LOADER/25 TON MOBILE CRANE
11.25/2.0-25	16.00-25	5P	MOBILE CRANE/ CRANE MACHINE
13.00/2.5-25	18.00-25	5P	GRADER/WATER SPRINKLER/ LOADER/ OTHER ENGINEERING VEHICLE/ DUMPER/MOBILE CRANE/ REACH STACKER
14.00/1.5-25	17.50-25	3P	WHEEL LOADER/ GRADER/ MOTOR GRADER/ MOBILE CRANE
17.00/1.7-25	20.50-25	3P	WHEEL LOADER/ GRADER
17.00/2.0-25	20.50-25	5P	WHEEL LOADER/ GRADER/ MOBILE CRANE
19.50-2.5-25	23.50-25	3P	WHEEL LOADER/ GRADER/ MOBILE CRANE
22.00/3.0-25	26.50-25	3P	WHEEL LOADER/ COLD REGENERATION MACHINE
25.00/3.5-25	29.50-25	3P	WHEEL LOADER/ LOAD ROLLER/ ROUGH TERRAIN CRANE(55TON)/ MOBILE CRANE

SOLIDO

OTR TYRE FITMENT PRESS



MODEL	IRC - 175	IRC - 250	IRC - 350	IRC - 450
FOR ALL TYRES FITTED TO RIMS	FROM 25" UP TO 51"	FROM 35" UP TO 57"	FROM 35" UP TO 63"	FROM 35" UP TO 75"
SPIN FORCE, TONS	200	250	350	450
OVERALL DIMENSIONS, mm	2800 x 2800 x 2300	3300 x 3300 x 2700	4400 x 4400 x 3500	5000 x 5000 x 3800
WEIGHT, TONS	11	13	18	22

SOLIDO

SOLID TYRE FITMENT PRESS



MODEL	IRC - 80	IRC - 120	IRC - 160	IRC - 200	IRC - 240
CAPACITY (TONS)	IRC 80	IRC 120	IRC160	IRC 200	IRC 240
MAX. TYRE DIMENSION (INCH)	12 INCH	15 INCH	20 INCH	24 INCH	25 INCH
WORKING PRESSURE (BAR)	250	250	250	250	250
NO. OF CLINDER	ONE	ONE	ONE	ONE	ONE
STROKE	400	400	400	500	600
MOTOR	3 PH, 5 HP, 415 V AC, 50 Hz	3 PH, 5 HP, 415 V AC, 50 Hz	3 PH, 7.5 HP, 415 V AC, 50 Hz	3 PH, 7.5 HP, 415 V AC, 50 Hz	3 PH, 10 HP, 415 V AC, 50 Hz
CONSTRUCTION	FABRICATED H FRAME	FABRICATED H FRAME	FABRICATED H FRAME	FABRICATED H FRAME	FABRICATED H FRAME

WARRANTY POLICY

- As Per Global Solid Tyre Industry Norms (ISO, ETRTO, ETC.) A Solid Tyre Shall Be Used In All Industrial Application Vehicles Subject To The Following Restrictions:
- The Tyres Cannot Be Used For Climbing Slopes Or Gradients Exceeding 5 Degrees
- The Maximum Distance That Can Be Run On A Solid Tyre Is Only 2 Kilometers Whether In Loaded Or Unloaded Condition.
- The Tyres Cannot Be Used For Long Distance Rides Like Other Automotive Vehicles, Even Within The Factory.
- The Vehicle Speed Cannot Exceed 25 Kmph, In Any Case.
- The Tyre Temperature Should Be Monitored To Be Less Than 60 Degrees.
- If It Exceeds 60 Degrees, Then The Tyre Must Be Allowed To Cool Down To Room Temperature Before Further Use.
- Non Fulfilment Of The Above Conditions Will Naturally Vitiate (or) Cancel Our Warranty Admissibility.
- In 'SOLIDO TYRES' We Admit Warranty Claims Upto A Service Life Of 6 Months (or) Usage Hours, If And Only If It Is Established By Us
- If There Is Any Manufacturing Defect, The Tyres Would Fail Within 1 Week For The Above Situations, We Provide 100% Replacement Warranty, Without Any Investigations.
- **For Other Warranty Claims:-**

  We Only Admit That The Tyre Had Not Performed To The Expectations Of The Customer: Either The Tread Gets Worn Out Faster Or The Customer Has Been Using The Tyre Without Noticing That The Tyre Is Getting Over-heated: Ultimately, The Tyre Would Fail With A Blow Out On The Side-wall Or Through The Worn-out Tread. Strictly Speaking There Is No Warranty Claim For Both The Above Situation. However, In Order To Help And Encourage Our Customers, We Offer A Pro-rated Warranty Based On The Tread Wear Or The No.of Hours Used As Evidenced By Log Book.

- **Standard Quality:-**

  The 'SOLIDO' Standard Tyre Has To Be Used On Smooth Well-paved Floor, Predominantly Indoors & Ware House For Single Shift (8 Hrs).

- **Premium Quality:-**

  The 'SOLIDO' Premium Tyre Has To Be Used On Smooth Well-paved Floor, Predominantly Indoors & Ware House For Double Shifts (15 Hrs).

- **Heavy Duty & Heat Resistant Quality (HD & HR):-**

  We Recommend A Heavy-duty & Heat Resistant Tyre Over A Standard Or Premium Tyre Only When: The Tyres Are Used On Indsutrial Vehicles Running More Or Less Continuously For 24 Hours Per Day. 'SOLIDO' Heavy-duty & Heat Resistant Tyre Manages Internal Heat Better On Continuous Usage.

  'SOLIDO' Heavy-duty & Heat Resistant Tyres Are Used On Industrial Vehicle That Run On Hard Cement Or Blue-metal Reinforced Concrete Floors Like Docks / Wharfs / Open Container Yards / Scrap Yards. In This Case The Normal Tread Gets Abraded Faster: So We Introduced A Much Durable Tread, Which Is More Abrasion-resistant.

- **Heavy Duty Cut & Chip Resistant Quality (HDCCR):-**

  'SOLIDO' Heavy Duty Tyre Is Still Not Recommended For High Cut & Chip Regions Like Glass, Metal Scrap Yards, Stone Mining & Steel Industries. Where The Tyre Tread Gets Cut Or Torn Or Chipped Off, If In That Case There Is Another Grade Called: Heavy-duty Cut & Chip Resistant Tyre Which Can Be Used Under All The Above Situation & Circumstance, Since The Heavy-duty Cut & Chip Resistant Are Used Under Special Application, But The Life Of The Tyre Is 3 Months.

- **Heavy Duty Fire Resistant Quality (HDFR):-**

  'SOLIDO' HD & HDCCR Tyre Is Not Recommended For Fire Resistant Regions Like High Temperature Steel Plant, Near To Furnance, Road Construction Laydown, Where Tyre Gets Melted Or Damaged Or Peel Off Membrane, If In That Case There Is Another Grade Called: Heavy-duty Fire Resistant Tyre Which Can Omits The Priming Of Substrate. So For All The Above Condition And Situation, HDFR Can Be Used & More Or Less It Would Work Under Very Hot Regions; So The Life Of The Tyre Is 3 Months Only.

- **Our Warranty Claim Limitation Period Would Remain As**

  Hours Of Duly Logged Service (or) 6 Months From Date Of Invoice To Our Customer(whichever Occurs Earlier.)

SOLIDO



SOLID TRACTION SOLID SMOOTH SOLID RIB



GSE RIB TYRE GSE TRACTION



SOLID OTR SHORT LUG SOLID OTR SMOOTH SOLID OTR LONG LUG



SOLID SKID STEER SOLID SMOOTH SKID STEER



SOLID CROSS (UG MINING) SOLID RIB (UG MINING) SOLID Z (UG MINING)



POB SOLID SMOOTH POB SOLID LUG



PBB SOLID (FLANGE TYPE) PBB SOLID (BEARING TYPE) PBB SOLID (FLANGE TYPE)



CURED ON WHEEL

