
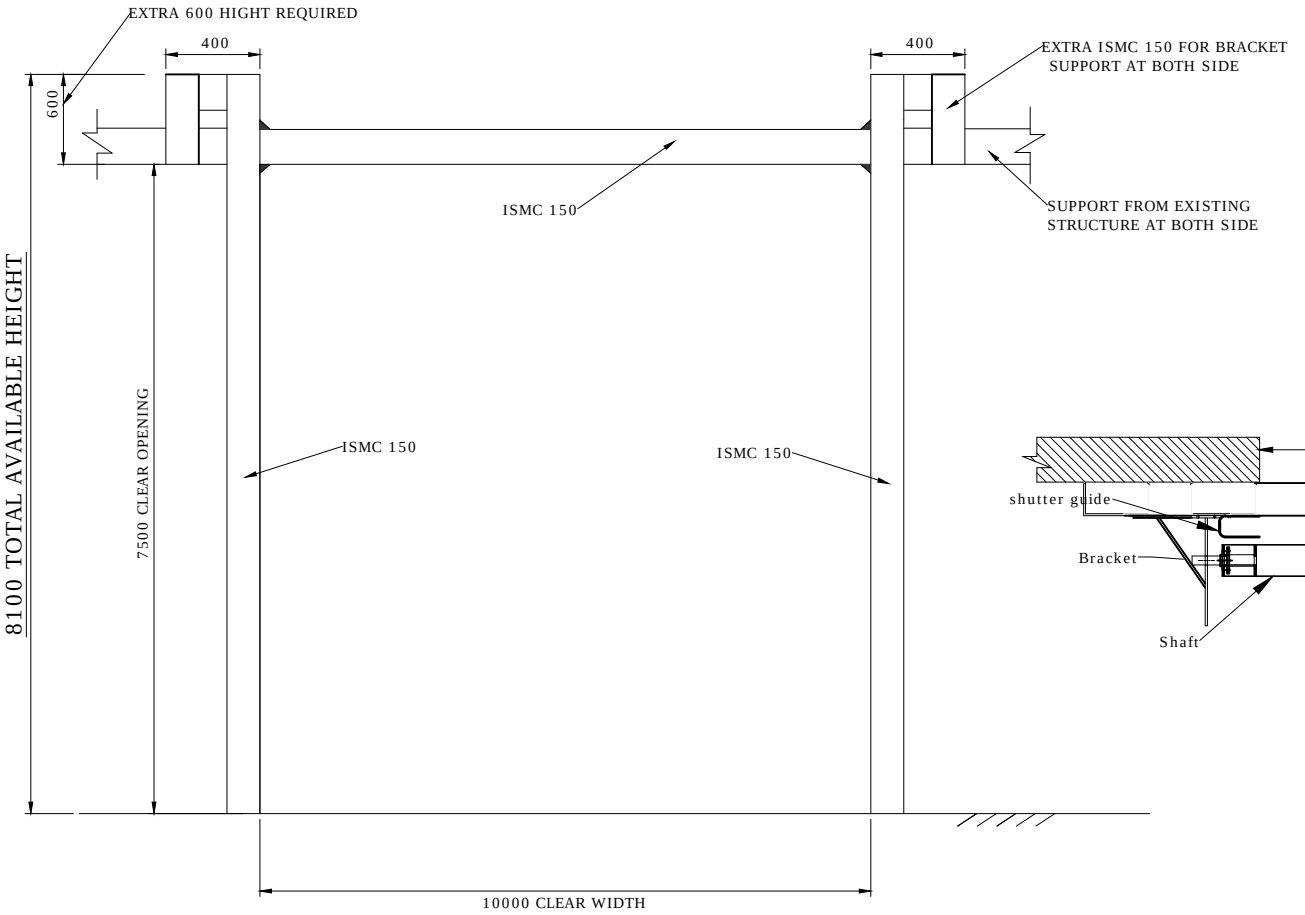


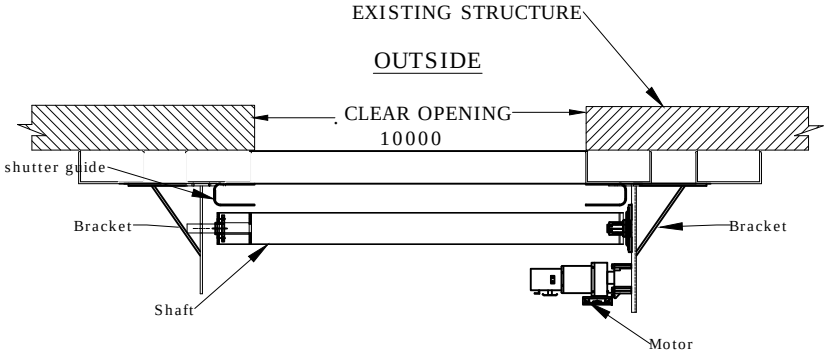

INSIDE

DETAIL VIEW A

(CLEAR OPENING (W)10000X(H)7500)

(NOTE: REQUIRED STRUCTURE FOR DOOR SHOULD BE IN CLIENT SCOPE.)

structure should bear approx.2500 k.g. weight. (wind pressure included). While Door is in operation, structure should not vibrate and bear/sustain all movements of rolling shutter.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE

STRUCTURE FOR ROLLING SHUTTER

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	SIGN	DATE
DRAWN	ABHIJIT	20/10/15
CHECK	ANIL	20/10/15
ENG		
APPRD.		
MFG		
Ref. No.		

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - MUKUND CONSTRUCTION

PROJECT- NEUMAN AND ESSER

SITE - BHOSARI MIDC

DWG. NO. - NIHVA/15-16/148

SCALE: 01 | WT: | SHEET: 01

If any queries contact : projects@nihva.com