

HYD CYL - Ø50 (Bore) X 25(Rod)X 140 (Stroke length) (Single Acting Spring Return)

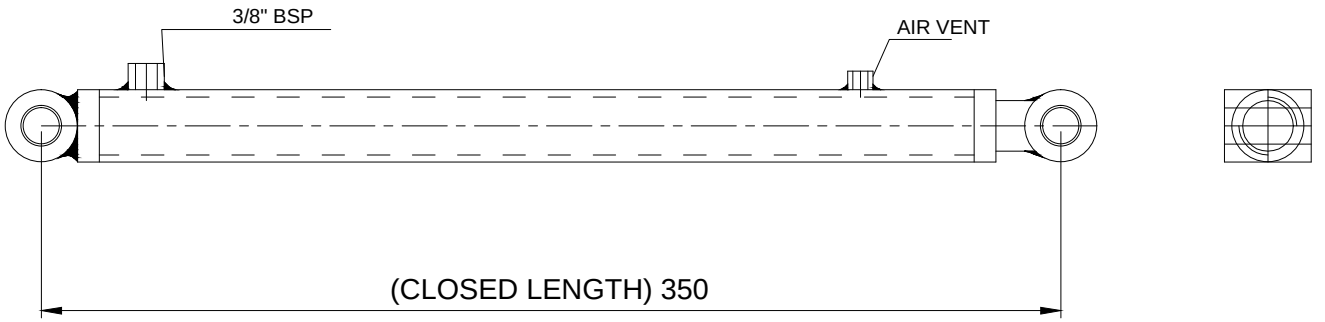

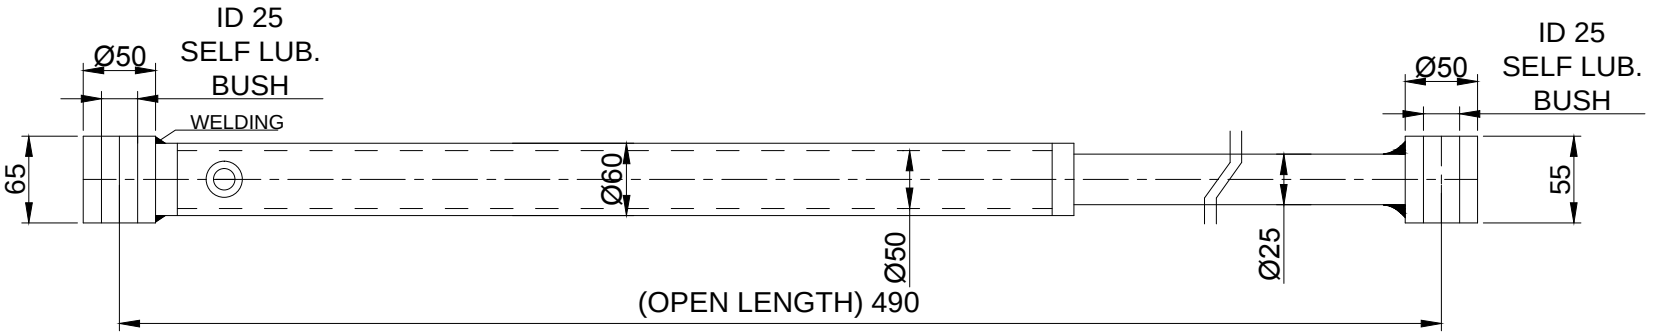

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 140 mm
- PISTON ROD :-Ø25mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 160 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 03 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: LIP CYLINDER			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE
DRAWN	S.M.S.		22.1.21
CHECK	S.M.S.		22.1.21
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -			
PROJECT -			
SITE LOCATION -			
If any queries contact : design@nihva.com	DWG. NO. : NIHVA/20-21/DR/0108		REV- 0
ALL DIMENSION ARE IN mm	SCALE: NTS	WT:	SHEET: 01 OF 01