Fire doors

Teckentrup
Doors · Frames

Standard program overview fire doors

Fire-resistant and fire-proof steel doors

Product	Dimensions in mm width/height (clear opening)	Tested as fire-resistant door in acc. with DIN 4102 / EN 1634-1 leaf/sheet thickness	Tested as fire-proof door in acc. with DIN 4102 / EN 1634-1 leaf/sheet thickness	Tested as smoke-proof door as per DIN 18095-3 / EN 1634-3	min. headroom	min. lateral projection left/right	Approval	Page
T 30-1-FSA “Teckentrup 72 E“ sliding door	W 1000 - 8500 H 2000 - 6000	72 mm/ 1.0 mm		W 1000 - 7000 H 2000 - 4500	see drawing	see drawing	Z-6.20-2137	197-198
T 30-2-FSA “Teckentrup 72 E“ sliding door	W 1500 - 8500 H 2000 - 6000	72 mm/ 1.0 mm		W 1500 - 7000 H 2000 - 4500	see drawing	see drawing	Z-6.20-2137	199-200
T 90-1-FSA “Teckentrup 72 E“ sliding door	W 1000 - 8500 H 2000 - 6000		72 mm/ 1.0	W 1000 - 7000 H 2000 - 4500	see drawing	see drawing	Z-6.20-2103	201-202
T 90-2-FSA “Teckentrup 72 E“ sliding door	W 1500 - 8500 H 2000 - 6000		72 mm/ 1.0	W 1500 - 7000 H 2000 - 4500	see drawing	see drawing	Z-6.20-2103	203-204
T 30-1-FSA “Teckentrup S“ sectional door	W 1000 - 5000 H 2000 - 3630	40 mm/ 0.4 mm			see drawing	see drawing	Z-6.20-2195	205-206
T 90-1 “Teckentrup HT-E“ vertical lift gate	W 1000 - 3700 H 2000 - 2950		62 mm/ 1.0 mm				Z-6.20-2185	207-208

Fire-resistant sliding steel door
T 30-1-FSA "Teckentrup 72 E"

Optionally with wicket door, optionally with glazing

Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		Fire-proof sliding steel door T 30-1-FSA, tested in accordance with DIN 4102/EN 1634-1. Single-leaf door opening to the left. Galvanized door leaf, 72 mm thick (element design). With 3-sided door seal, galvanized. Door suspension consisting of tubular guide rail with double twin running gears. Automatic closing of the door due to counterweights in the protective box. „Teckentrup 72 E" (approval no. Z-6.20-2137) or equivalent.		
		Ordering dimensions: modular dimensions: ____ mm wide and ____ mm high Ordering details: wall and header thickness (concrete ____ mm/masonry ____mm / autoclaved aerated concrete ___mm). Type of wall in the slide-back area at the guide rail concrete/masonry thickness_____. Door opens left/right (seen from the fixing side of the door). Headroom ___ mm (min. 210 mm for wall installation) left-hand space _____ mm (clear width + 440 mm or 700 mm - slide-back area) right-hand space _____ mm (min. 310 mm). With/Without wicket door		

Technical data

Building authority approval: Fire-proof sliding steel door **T 30-1-FSA "Teckentrup 72 E"** Z-6.20-2137 tested as per DIN 4102/EN 1634-1

Approved wall types:

Guide rail area:
- Concrete — min. 140 mm
- Masonry, only slide-back area: — min. 175 mm
- Covered steel beams — F60-A

Lateral walls:
- Concrete — min. 140 mm
- Masonry — min. 175 mm
- Aerated concrete — min. 200 mm
- for reinforced autoclaved aerated concrete slabs — min. 175 mm
- covered steel beams and — F60-A

Approved dimensions:
Clear width: 1000 - 8500 mm
Clear height: 2000 - 6000 mm

Installation: Lintel mounting or ceiling mounting

Opening direction: Door opens to the left or right

Door leaf: Door leaf consisting of individual elements (number of elements acc. to opening width), double-skinned
Insulation: mineral fibre and gypsum boards
Sheet thickness: 1.0 mm
Element weight: approx. 38 kg/m²

Door leaf thickness: 72 mm

Door seal:
- Galvanized seal profiles, 2 mm thick, on 3 sides
- Guide rollers (lower door guide)
- Weight box with counterweights (behind the run-in side)

Special equipment: weight box slide-back area

Surface: Door leaf and seal galvanized
Special equipment: prime coat (similar to RAL 9002), version stainless steel, RAL of choice

Fittings:
- Tubular guide rails with height-adjustable double twin running gears on ball bearings
- 2 damping cylinders
- 1 radial damper
- 1 recessed handle/1 push handle
- Guide rail cover, insulated
- Guide rail cover in the opening area

Also available in STAINLESS STEEL

Wicket door: Between two door leaf elements
- Door leaf: double-skinned, rebated on 3 sides, without threshold. Opening to both sides possible. Clear dimensions of door: 1005 x 2009 mm (755 x 1800 mm)
- Insulation: mineral fibre and gypsum boards
- Sheet thickness: 1.0 mm
- Door leaf thickness: 72 mm
- Fitting: 2 three-piece 3D-hinges, mortice lock with latch lever as per DIN 18250, prepared for profile cylinder, special handle set, black, slide rail door closer according to DIN EN 1154. Special equipment: profile cylinder 45 + 30, panic lock, optionally two wicket doors.


Glazing for door leaf and wicket door: Fire-resistant glass "Promaglas 30", 17 mm thick with steel glass holding strips


Special equipment:
- Complete hold-open device consisting of: ___ smoke detectors, number of smoke detectors according to DIBt guidelines, issued 1988. 1 magnetic clamp 1 mains rectifier 220/24 V, 1 emergency release button. Acoustic alarm signal
- Complete electric drive (opener)
- Free-wheel function
- Hook lock Profile cylinder 40 + 40 mm
- Niche flap
- Recess shutter
- Artifical buffer
- Artifical headroom


Further qualifications (special equipment):
- **Smoke-proof** in acc. with DIN 18095 / EN 1634-3 (except VA)
  NEW available with wicket door


Fire-resistant sliding steel door
T 30-1-FSA “Teckentrup 72 E“

Optionally with wicket door, optionally with glazing

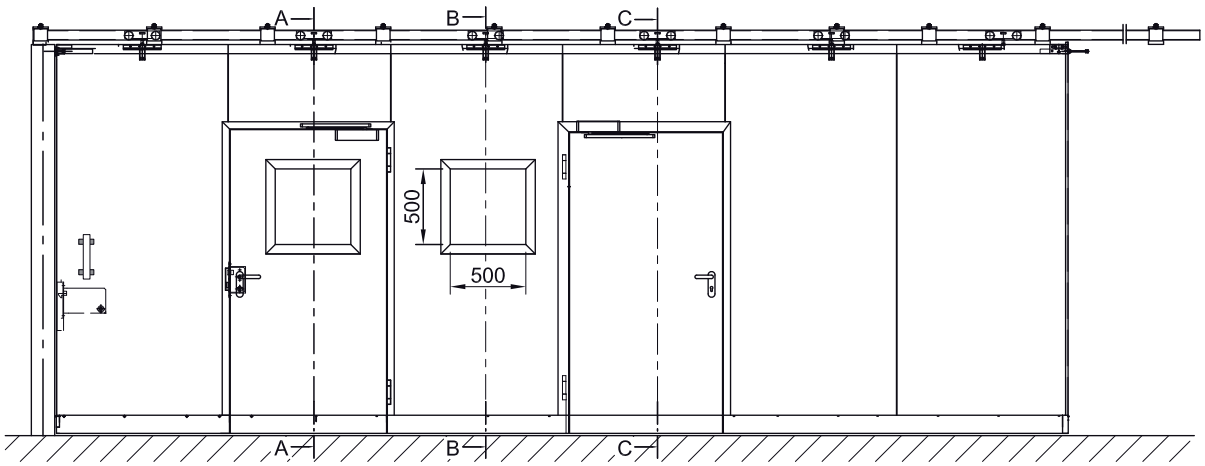

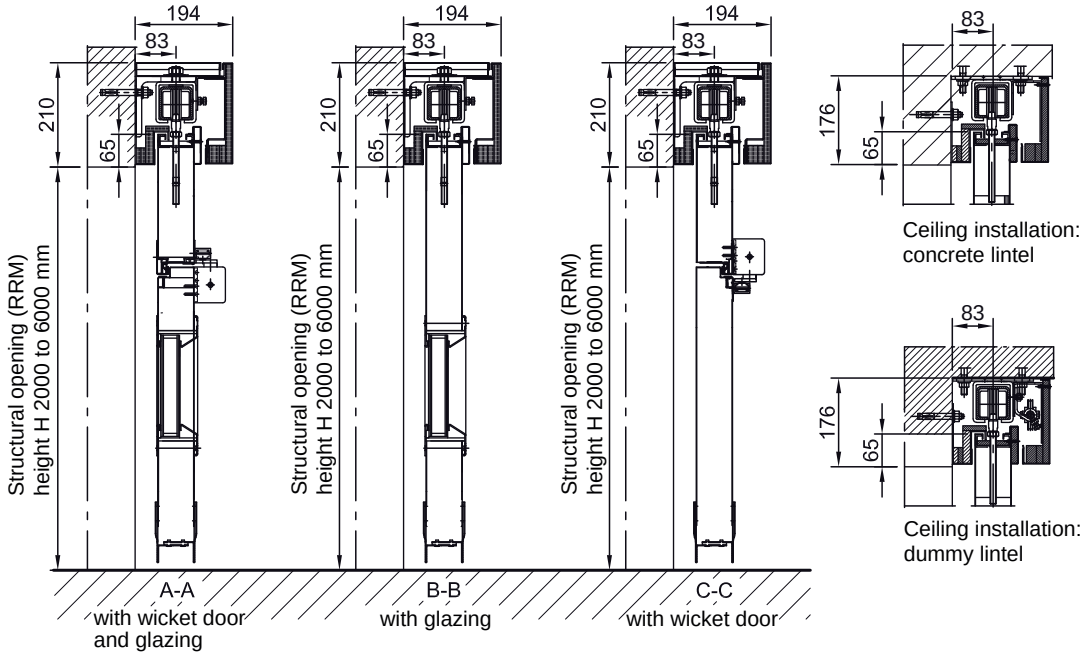

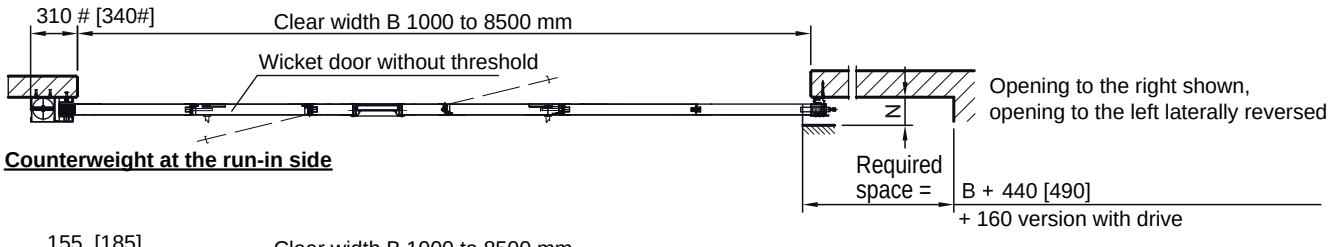

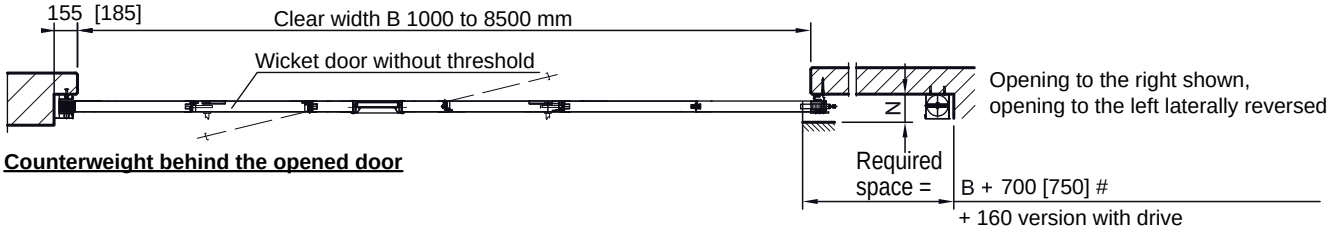

Installion of the guide rail:
1. Through bolts M12 for masonry
2. Steel expansion plugs for concrete
3. Weld-on assembly to concreted anchor plates
4. Screw-on assembly on covered steel beam

Dimension N:
- for columns min. 200 mm
- for recess shutter min. 280 mm
- and ceiling cover min. 300 mm

[ ] For autoclaved aerated concrete walls
on B:H > 2:1 = + 175 mm (doubled counterweights)

Subject to technical changes.

Fire-resistant sliding steel door
T 30-2-FSA “Teckentrup 72 E“

Optionally with wicket door, optionally with glazing

Teckentrup Doors · Frames

Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		Fire-proof sliding steel door T 30-2-FSA, tested in accordance with DIN 4102-5/EN 1634-1. Double-leaf door opening to the left. Galvanized door leaf, 72 mm thick (element design). With 3-sided door seal, galvanized. Door suspension consisting of tubular guide rail with double twin running gears. Automatic closing of the door due to counterweights in the protective box. „Teckentrup 72 E” (approval no. Z-6.20-2137) or equivalent.		
		Ordering dimensions: modular dimensions: ____ mm wide and ____ mm high Ordering details: wall and header thickness (concrete ____ mm/masonry ____mm / autoclaved aerated concrete ___mm). Type of wall in the slide-back area at the guide rail concrete/masonry thickness_____. Door opens left/right (seen from the fixing side of the door). Headroom ___ mm (min. 210 mm for wall installation) left-hand space _____ mm (clear width/2 + 650 mm - slide-back area) right-hand space _____ mm (min. 310 mm). With/Without wicket door		

Technical data

Also available in STAINLESS STEEL

Building authority approval: Fire-proof sliding steel door **T 30-2-FSA “Teckentrup 72 E”** Z-6.20-2137 tested as per DIN 4102-5/EN 1634-1

Approved wall types:

Guide rail area:
- Concrete — min. 140 mm
- Masonry
  only slide-back area: — min. 175 mm
- Covered steel beams — F60-A

Lateral walls:
- Concrete — min. 140 mm
- Masonry — min. 175 mm
- Aerated concrete — min. 200 mm
  for reinforced autoclaved aerated concrete slabs — min. 175 mm
- covered steel beams and — F60-A

Approved dimensions:
Clear width: 1500 - 8500 mm
Clear height: 2000 - 6000 mm

Installation: Lintel mounting or ceiling mounting

Opening direction: Door opens to the left or right

Door leaf: Door leaf consisting of individual elements (number of elements acc. to opening width), double-skinned
Insulation: mineral fibre and gypsum boards
Sheet thickness: 1.0 mm
Element weight: approx. 38 kg/m²

Door leaf thickness: 72 mm

Door seal:
- Galvanized seal profiles, 2 mm thick, on 3 sides
- Guide rollers (lower door guide)
- 2 weight boxes with counterweights (behind the run-in side)

Surface: Door leaf and seal galvanized
Special equipment: prime coat (similar to RAL 9002), version stainless steel, RAL of choice

Fittings:
- Tubular guide rails with height-adjustable double twin running gears on ball bearings
- 4 damping cylinders
- 2 radial damper
- 2 recessed handles, 2 push handles
- Guide rail cover, insulated
- Guide rail cover in the opening area

Wicket door: Between two door leaf elements
- Door leaf: double-skinned, rebated on 3 sides, without threshold. Opening to both sides possible. Clear dimensions of door: 1005 x 2009 mm (755 x 1820 mm)
- Insulation: mineral fibre and gypsum boards
- Sheet thickness: 1.0 mm
- Door leaf thickness: 72 mm
- Fitting: 2 three-piece 3D-hinges, mortice lock with latch lever as per DIN 18250, prepared for profile cylinder, special handle set, black, slide rail door closer according to DIN EN 1154. Special equipment: profile cylinder 45 + 30, panic lock, optionally two wicket doors.


Glazing for door leaf and wicket door: Fire-resistant glass “Promaglas 30“, 17 mm thick with steel glass holding strips


Special equipment:
- Complete hold-open device consisting of: ___ smoke detectors, number of smoke detectors according to DIBt guidelines, issued 1988. 2 magnetic clamps 1 mains rectifier 220/24 V, 1 emergency release button. Acoustic alarm signal
- Complete electric drive (opener)
- Free-wheel function
- Hook lock Profile cylinder 40 + 40 mm
- Niche flap
- Recess shutter
- Artifical buffer
- Artifical headroom


Further qualifications (special equipment):
- **Smoke-proof** as per DIN 18095 / EN 1634-3 (without wicket door/ max. 30.35 m²/except VA)

Fire-resistant sliding steel door
T 30-2-FSA “Teckentrup 72 E“

Optionally with wicket door, optionally with glazing

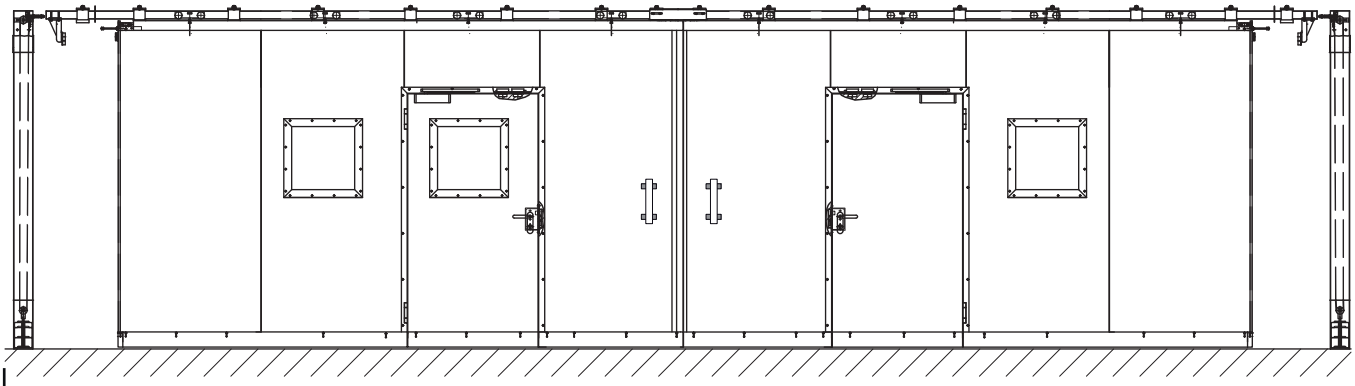

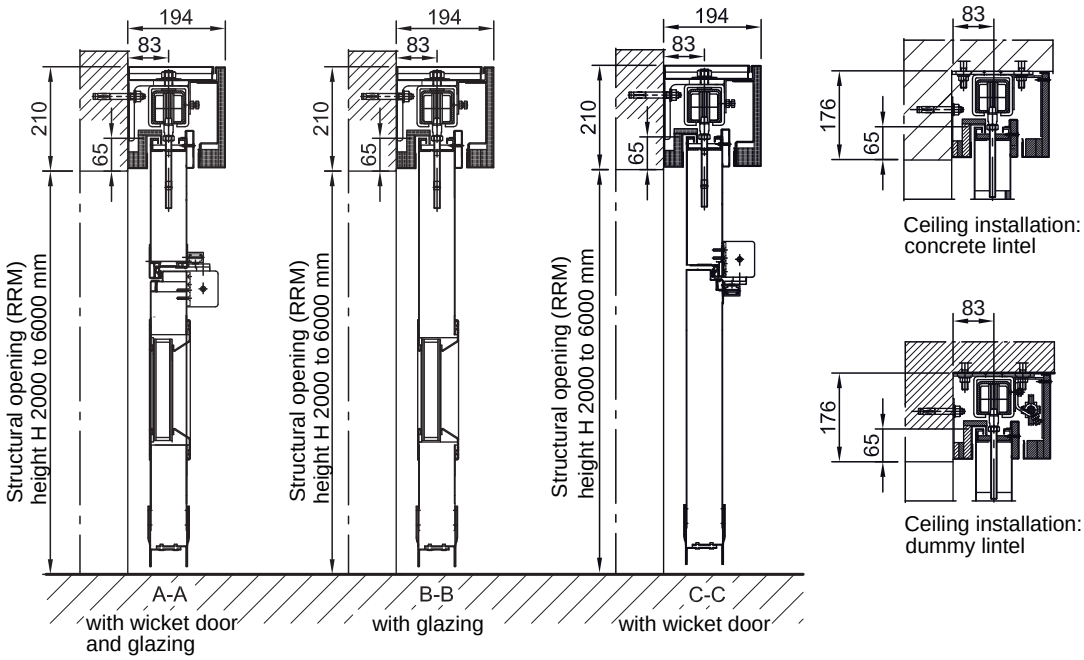

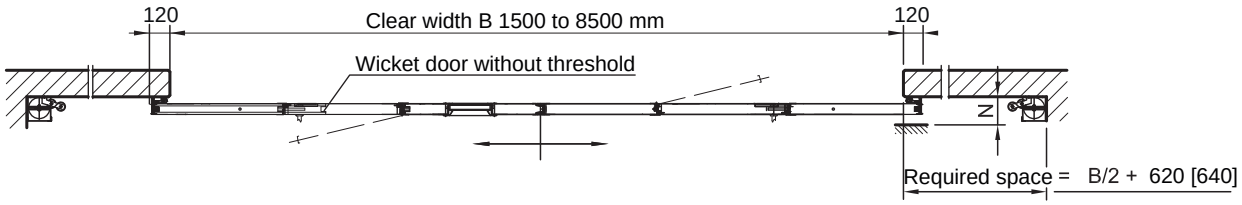

Installion of the guide rail:
1. Through bolts M12 for masonry
2. Steel expansion plugs for concrete
3. Weld-on assembly to concreted anchor plates
4. Screw-on assembly on covered steel beam

Dimension N:
- for columns min. 200 mm
- for recess shutter min. 280 mm
- and ceiling cover min. 300 mm

[ ] For autoclaved aerated concrete walls

Subject to technical changes.

Fire-resistant sliding steel door
T 90-1-FSA “Teckentrup 72 E“

Optionally with wicket door, optionally with glazing

Teckentrup
Doors · Frames

Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		Fire-proof sliding steel door T 90-1-FSA, tested in accordance with DIN 4102-5/EN 1634-1. Single-leaf door opening to the left. Galvanized door leaf, 72 mm thick (element design). With 3-sided door seal, galvanized. Door suspension consisting of tubular guide rail with double twin running gears. Automatic closing of the door due to counterweights in the protective box. „Teckentrup 72 E” (approval no. Z-6.20-2103) or equivalent.		
		Ordering dimensions: modular dimensions: ____ mm wide and ____ mm high Ordering details: wall and header thickness (concrete ____ mm/masonry ____mm / autoclaved aerated concrete ___mm). Type of wall in the slide-back area at the guide rail concrete/masonry thickness_____. Door opens left/right (seen from the fixing side of the door). Headroom ___ mm (min. 210 mm for wall installation) left-hand space _____ mm (clear width + 440 mm or 700 mm - slide-back area) right-hand space _____ mm (min. 310 mm). With/Without wicket door		

Technical data

Also available in STAINLESS STEEL

Building authority approval: Fire-proof sliding steel door **T 90-1-FSA “Teckentrup 72 E”** Z-6.20-2103 tested as per DIN 4102-5/EN 1634-1

Approved wall types:

Guide rail area:
- Concrete — min. 140 mm
- Masonry — only slide-back area: min. 175 mm
- Covered steel beams — F90-A

Lateral walls:
- Concrete — min. 140 mm
- Masonry — min. 175 mm
- Aerated concrete walls — min. 200 mm
- reinforced aer. concrete slabs — min. 175 mm
- covered steel beams and — F90-A

Approved dimensions:
Clear width: 1000 - 8500 mm
Clear height: 2000 - 6000 mm

Installation: Lintel mounting or ceiling mounting

Opening direction: Door opens to the left or right

Door leaf: Door leaf consisting of individual elements (number of elements acc. to opening width), double-skinned
Insulation: mineral fibre and gypsum boards
Sheet thickness: 1.0 mm
Element weight: approx. 44 kg/m²

Door leaf thickness: 72 mm

Door seal:
- Galvanized profiles, 2 mm thick, on 3 sides
- Guide rollers (lower door guide)
- Weight box with counterweights (behind the run-in side)

Special equipment: weight box slide-back area

Surface: Door leaf and seal galvanized
Special equipment: prime coat (similar to RAL 9002), version in stainless steel, RAL of choice

Fittings:
- Tubular guide rails with height-adjustable double twin running gears on ball bearings
- 2 damping cylinders
- 1 radial damper
- 1 recessed handle/1 push handle
- Guide rail cover, insulated
- Guide rail cover in the opening area

Wicket door: Between two door leaf elements
- Door leaf: double-skinned, rebated on 3 sides, without threshold. Opening to both sides possible. Clear dimensions of door: 1005 x 2009 mm
- Insulation: mineral fibre and gypsum boards
- Sheet thickness: 1.0 mm
- Door leaf thickness: 72 mm
- Fitting: 2 three-piece 3D-hinges, mortice lock with latch lever as per DIN 18250, prepared for profile cylinder, special handle set, black, slide rail door closer according to DIN EN 1154. Special equipment: profile cylinder 45 + 30, panic lock, optionally two wicket doors.


Glazing for door leaf and wicket door: Fire-resistant glass “Promaglas 90“, 35 mm thick with steel glass holding strips


Special equipment:
- Complete hold-open device consisting of: ___ smoke detectors, number of smoke detectors according to DIBt guidelines, issued 1988. 1 magnetic clamp 1 mains rectifier 220/24 V, 1 emergency release button. Acoustic alarm signal
- Complete electric drive (opener)
- Free-wheel function
- Hook lock Profile cylinder 40 + 40 mm
- Niche flap
- Recess shutter
- Artifical buffer
- Artifical headroom


Further qualifications (special equipment):
- **Smoke-proof** in acc. with DIN 18095 / EN 1634-3 (except VA)
  NEW available with wicket door


Fire-resistant sliding steel door
T 90-1-FSA “Teckentrup 72 E“


Optionally with wicket door, optionally with glazing

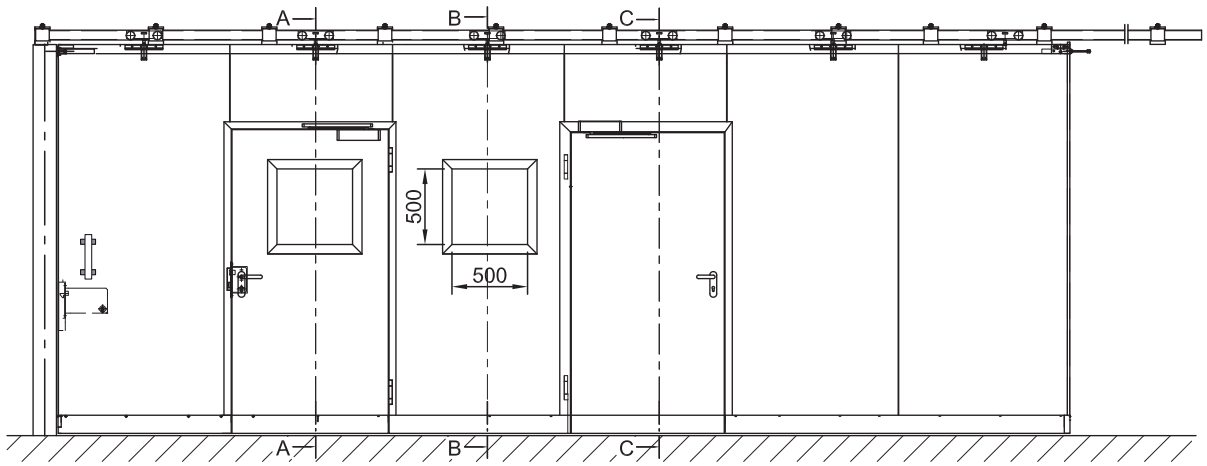


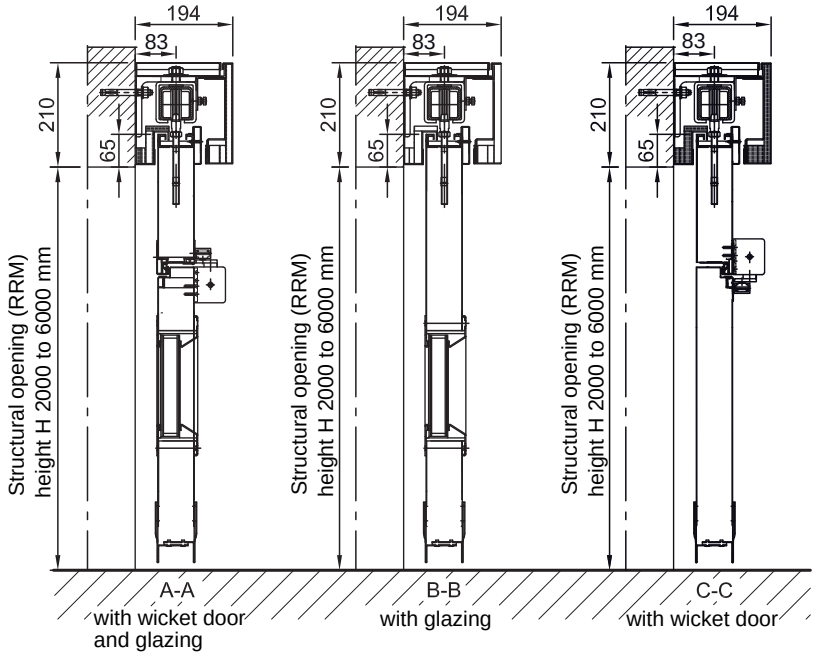





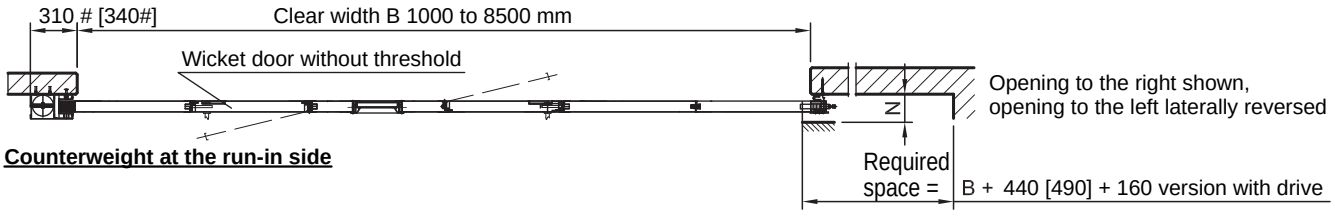

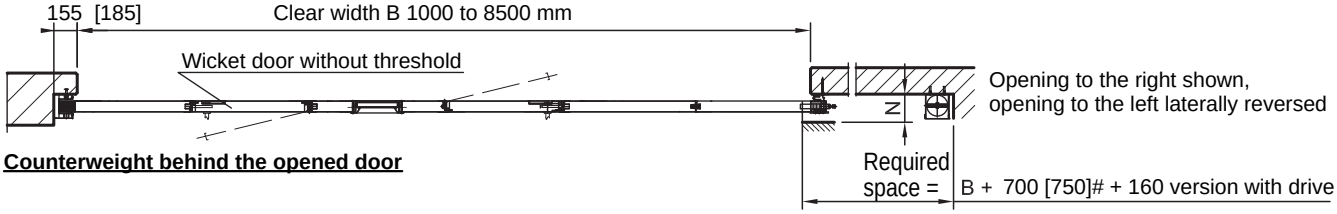

Installion of the guide rail:
1. Through bolts M12 for masonry
2. Steel expansion plugs for concrete
3. Weld-on assembly to concreted anchor plates
4. Screw-on assembly on covered steel beam

Dimension N:
- for columns min. 200 mm
- for recess shutter min. 280 mm
- and ceiling cover min. 300 mm

[ ] For autoclaved aerated concrete walls
on B:H > 2:1 = + 175 mm (doubled counterweights)

Subject to technical changes.

Fire-resistant sliding steel door
T 90-2-FSA "Teckentrup 72 E"

Optionally with wicket door, optionally with glazing

Teckentrup Doors · Frames

Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		Fire-proof sliding steel door T 90-2-FSA, tested in accordance with DIN 4102-5/EN 1634-1. Double-leaf door opening to the left. Galvanized door leaf, 72 mm thick (element design). With 3-sided door seal, galvanized. Door suspension consisting of tubular guide rail with double twin running gears. Automatic closing of the door due to counterweights in the protective box. „Teckentrup 72 E" (approval no. Z-6.20-2103) or equivalent.		
		Ordering dimensions: modular dimensions: ____ mm wide and ____ mm high Ordering details: wall and header thickness (concrete ____ mm/masonry ____mm / autoclaved aerated concrete ___mm). Type of wall in the slide-back area at the guide rail concrete/masonry thickness_____. Door opens left/right (seen from the fixing side of the door). Headroom ___ mm (min. 210 mm for wall installation) left-hand space _____ mm (clear width/2 + 650 mm - slide-back area) right-hand space _____ mm (min. 310 mm). With/Without wicket door		

Technical data

Building authority approval: Fire-proof sliding steel door **T 90-2-FSA "Teckentrup 72 E"** Z-6.20-2103 tested as per DIN 4102-5/EN 1634-1

Approved wall types:

Guide rail area:
- Concrete — min. 140 mm
- Masonry — only slide-back area: min. 175 mm
- Covered steel beams — F90-A

Lateral walls:
- Concrete — min. 140 mm
- Masonry — min. 175 mm
- Aerated concrete — min. 200 mm
- reinforced aer. concrete slabs — min. 175 mm
- Covered steel beams — F90-A

Approved dimensions:
Clear width: 1500 - 8500 mm
Clear height: 2000 - 6000 mm

Installation: Lintel mounting or ceiling mounting

Opening direction: Door opens to the left or right

Door leaf: Door leaf consisting of individual elements (number of elements acc. to opening width), double-skinned
Insulation: mineral fibre and gypsum boards
Sheet thickness: 1.0 mm
Element weight: approx. 44 kg/m²

Door leaf thickness: 72 mm

Door seal:
- Galvanized seal profiles, 2 mm thick, on 3 sides
- Guide rollers (lower door guide)
- 2 weight boxes with counterweights (behind the run-in side)

Surface: Door leaf and seal galvanized
Special equipment: prime coat (similar to RAL 9002), version in stainless steel, RAL of choice

Fittings:
- Tubular guide rails with height-adjustable double twin running gears on ball bearings
- 4 damping cylinders
- 2 radial damper
- 2 recessed handles, 2 push handles
- Guide rail cover, insulated
- Guide rail cover in the opening area

Also available in STAINLESS STEEL

Wicket door: Between two door leaf elements
- Door leaf: double-skinned, rebated on 3 sides, without threshold. Opening to both sides possible. Clear dimensions of door: 1005 x 2009 mm (755 x 1800 mm)
- Insulation: mineral fibre and gypsum boards
- Sheet thickness: 1.0 mm
- Door leaf thickness: 72 mm
- Fitting: 2 three-piece 3D-hinges, mortice lock with latch lever as per DIN 18250, prepared for profile cylinder, special handle set, black, slide rail door closer according to DIN EN 1154. Special equipment: profile cylinder 45 + 30, panic lock, optionally two wicket doors.


Glazing for door leaf and wicket door: Fire-resistant glass "Promaglas 90", 35 mm thick with steel glass holding strips


Special equipment:
- Prime coat (similar to RAL 9002)
- Complete hold-open device consisting of: ___ smoke detectors, number of smoke detectors according to DIBt guidelines, issued 1988. 2 magnetic clamps 1 mains rectifier 220/24 V, 1 emergency release button. Acoustic alarm signal
- Complete electric drive (opener)
- Free-wheel function
- Hook lock Profile cylinder 40 + 40 mm
- Niche flap
- Recess shutter
- Artifical buffer
- Artifical headroom


Further qualifications (special equipment):
- **Smoke-proof** as per DIN 18095 / EN 1634-3 (without wicket door/ max. 30.35 m²/except VA)

Fire-resistant sliding steel door
T 90-2-FSA “Teckentrup 72 E“


Optionally with wicket door, optionally with glazing

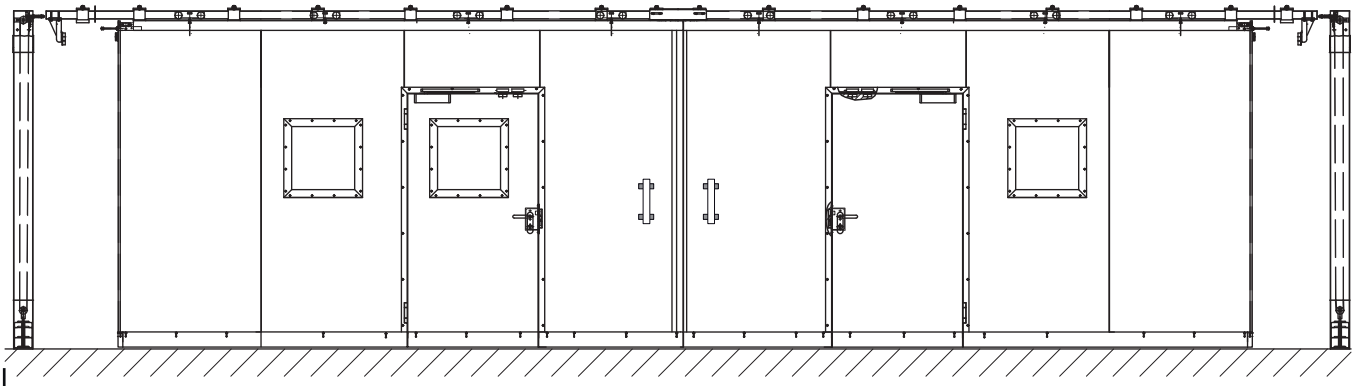

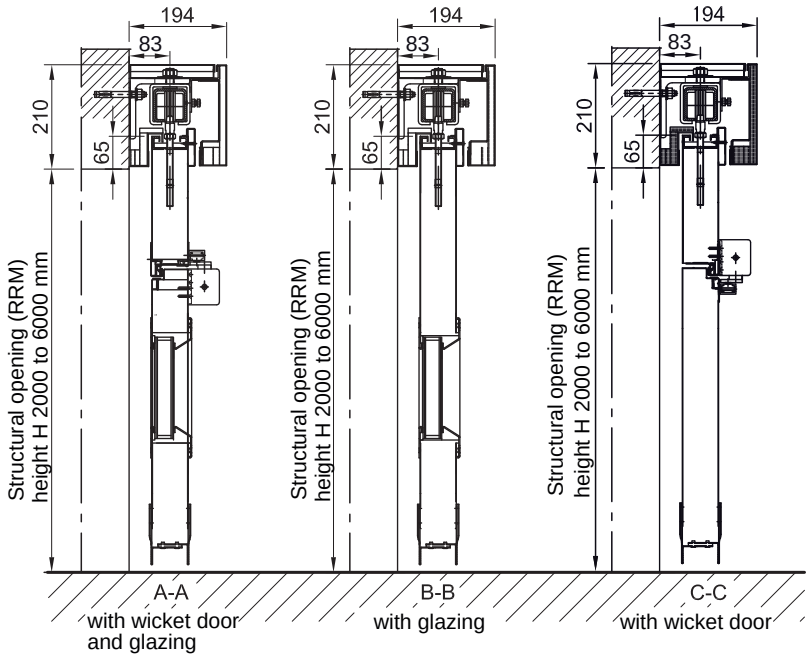




Ceiling installation:
concrete lintel



Ceiling installation:
dummy lintel

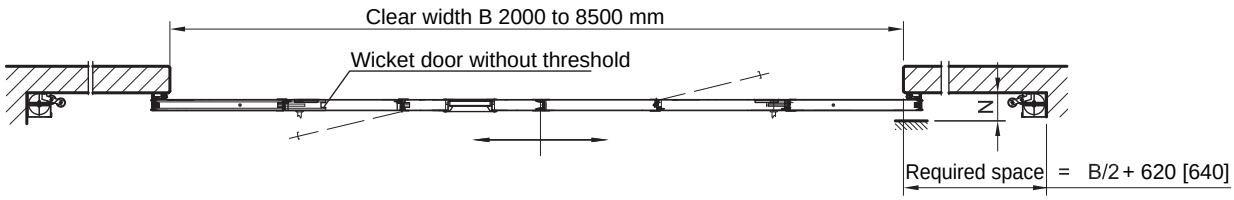

Installion of the guide rail:
1. Through bolts M12 for masonry
2. Steel expansion plugs for concrete
3. Weld-on assembly to concreted anchor plates
4. Screw-on assembly on covered steel beam

Dimension N:
- for columns min. 200 mm
- for recess shutter min. 280 mm
- and ceiling cover min. 300 mm

[ ] For autoclaved aerated concrete walls

Subject to technical changes.

Fire-resistant sectional door
T 30-FSA „Teckentrup S“

Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		T30 sectional steel door, tested in accordance with DIN 4102. Made of various overlapping panel elements. Panel thickness 40 mm, surface on both sides consisting of coated, full-surface bonded steel plates 0.4 mm thick. Stucco design on the outer and inner surface. Panel elements filled with mineral wool. The individual panel elements are interconnected hinges. The hinge area is protected on the outside via patented finger pinch protection and on the inside via cover strips. EDPM lateral protective strips and bottom floor seal. Screwed hinges made of galvanized steel, lateral guide roller with adjustable steel guide rails on ball bearings guided in lateral C-shaped profiles. Weight compensation with torsion spring shaft with lateral load-bearing cables. Alternatively with opener or with VDS approved fire protection drive for non-counterbalanced door. “Teckentrup S” (approval no.: Z-6.20-2195) or equivalent.		
		Ordering dimensions: modular dimensions: ___mm width and ___mm height Ordering details: wall and header thickness (concrete ___mm, masonry ___mm, autoclaved aerated concrete ___mm; Concrete ≥ 100 mm, masonry ≥ 175 mm, autoclaved aerated concrete ≥ 200 mm and steel concrete lintel. Headroom: ___mm (depending on the type of fitting and static requirements) Type of fitting: Normal fitting Winding shaft front or rear High lift guide rail fitting Right or left-hand drive Vertical fitting		

Technical data

Building authority approval: Fire-resistant sectional steel door
T30-FSA “Teckentrup S”
Approval no.: Z-6.20-2195,
tested as per DIN 4102

Installation in: Walls made of:
- Masonry min. 175 mm *
- Concrete min. 140 mm *
- Autoclaved aerated concrete min. 200 mm and steel concrete lintel *
- Reinforced autoclaved aerated concrete slabs min. 175 mm and steel concrete lintel *

* and according to static requirements

Approved dimensions: Modular dimensions
width: 1000 – 5000 mm
height: 2000 – 3630 mm

Door leaf: Door leaf consisting of horizontally arranged, overlapping panel elements, interconnected with hinges. Number of panel elements according to the door height. Double-skinned, sheet thickness 0.4 mm. Insulation: mineral wool bonded over the entire surface

Leaf thickness: 40 mm

Frame: The supporting structure consists of profiled, galvanized steel plate, galvanized guide rail as a C-shaped profile, frame cover made of smooth, galvanized steel plate. The horizontal wall smoke seal is located at the lower edge of the header. With a normal fitting, the door is installed in horizontally arranged guide rails on the ceiling (observe static values of the ceiling construction). With a vertical fitting, the frame for the slide-back area is located above the clear opening.

Weight compensation: Via torsion spring shaft. Alternatively, non-counterbalanced system with winding shaft and fire-protection drive.

Surface: Stucco design outside and inside (alternatively, woodgrain on the outside).
Prime coated door leaf (outside and inside RAL 9002)
If desired, RAL prime coating of your choice, limited selection (see price sheet).
Galvanized frame, torsion springs with basic coat of paint.

Fitting: Rollers running on ball bearings to guide the panel elements, torsion (winding) shaft on ball bearings, cable pulleys on ball bearings for rear drive, damping springs at the top, one suspension cable on the right and left-hand side, handles on both sides for manually operated door, hold-open device with smoke detectors

Types of fitting:
N: normal fitting **
HL: high lift guide rail fitting
VL: vertical fitting **
** (for required space see installation drawings)

Special equipment: Woodgrain outer structure,
frame panelling prime coated in RAL 9002.
Window with F30 glazing, max.
window size 820 x 335 mm,
max. 2 windows per panel,
max. glazing surface ≤ 2 m² per door
(lateral width min. 115 mm) with steel glass-holding strips.


Drives: Door counterbalanced with torsion spring shaft:
a) Spring shaft equipped with eddy current brake and immobilization brake. Using the eddy current brake it is possible to adjust the door speed range from 0.08 to 0.2 m/sec.. The immobilization brake is used to hold open the door in combination with a power supply unit and smoke detectors. Smoke detectors according to guidelines for hold-open devices. Handles are used to open the door (max. door height 2125 mm).
b) The same as a) but with additional chain hoist to open the door
c) The same as a) but a motor with spur gear unit functions as the opener 230V, IP 44


Control: **Counterbalanced door:**
a manually operated door is held open via the immobilization brake. Door release via the close button, via the smoke detector or during a power cut ensures that the door closes at a regulated speed and in a counterbalanced manner. An alarm sounds at the same time. As a drive opener, the door can be opened and closed in deadman mode.

Safety standard and performance classes:
- Tested in acc. with safety standard EN 12604
- Resistance to wind load tested in acc. with EN 12424 class 2 (max. 450 N/m² wind load)
- According to the certification fire sectional doors are manufactured for 2-3 operations daily

Fire-resistant sectional door
T 30-FSA „Teckentrup S”


Standard: standard fitting front drive

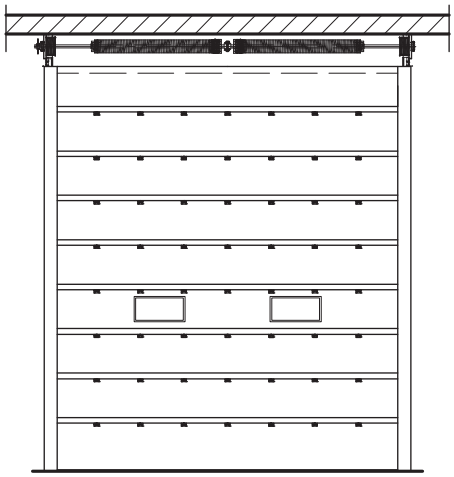

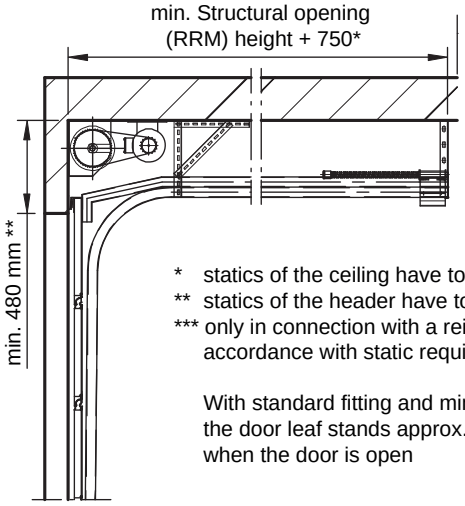


* statics of the ceiling have to be adjusted to the door weight
** statics of the header have to be adjusted to the door weight
*** only in connection with a reinforced concrete lintel in accordance with static requirements


With standard fitting and minimum headroom, the door leaf stands approx. 50 mm in the opening when the door is open

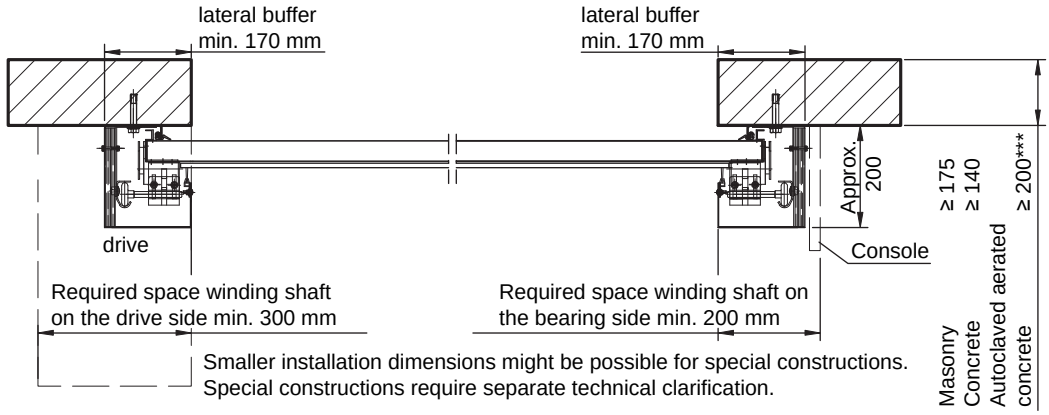


Smaller installation dimensions might be possible for special constructions.
Special constructions require separate technical clarification.

Normal fitting rear drive

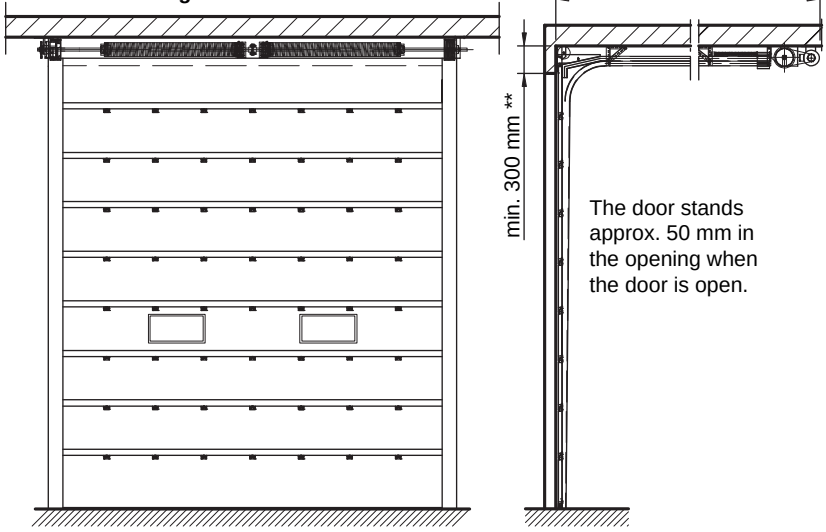

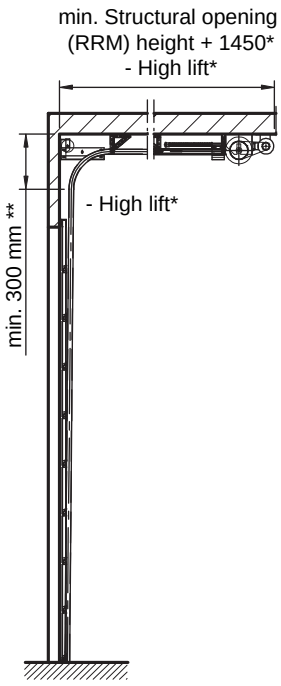

High lift fittingrear drive

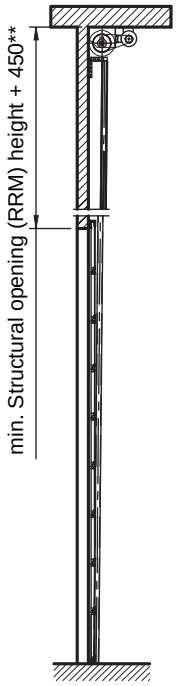

Vertical fittingfront drive

Minimum installation dimensions are specified for the maximum door size.
Smaller installation dimensions might be possible for smaller door sizes.

Subject to technical changes.

Fire-resistant steel vertical lift gate T 90-1-FSA „Teckentrup HT-E“

Text example

Compile and tender according to requirements.
Please refer to technical data below for respective details.
Updated 1st June 2015

Position	No. of pieces	Item	Unit price €	Total price €
		Fire-proof steel vertical lift gate T 90-1-FSA tested in accordance with DIN 4102. Single-leaf door opening upwards. Galvanized door leaf, 63 mm thick (element design). With 3-sided door seal, galvanized. Lateral guide rails with element guide rollers. Automatic closing of the door due to dead weight of the door leaf. Manual opening with the aid of counterweights in the protective box. “Teckentrup HT-E“ or equivalent.		
		Ordering dimensions: modular dimensions: _____ mm width and _____ mm height Ordering details: wall and header thickness (concrete _____mm/masonry _____mm), headroom (concrete ___ mm/masonry ____ mm - but min. opening height + 1000 mm), right-hand space _____mm, left-hand space _____mm		

Technical data

Building authority approval: Fire-resistant steel vertical lift gate
T 90-1-FSA “Teckentrup HT-E”
Z-6.20-2185
tested as per DIN 4102-5/EN 1634-1

Installation in: walls made of:
- Masonry min. 240 mm
- Concrete min. 140 mm
- Autoclaved aerated concrete
  · to DIN 4165 min. 175 mm
  · for reinforced min. 200 mm

Approved dimensions: modular dimensions
width: 1000 – 3700 mm
height: 2000 – 2950 mm

Opening direction: gate opens upwards

Door leaf: double-skinned
reinforcement: U-shaped steel
insulation: mineral fibre and gypsum boards
sheet thickness: 1 mm

Door leaf thickness: 62 mm

Door seal:
- Galvanized seal profiles, 3 mm thick, on 3 sides
- Lateral guide rails with element guide rollers

Counterweight box with counterweights (located on the right and left-hand side)


Surface: galvanized door leaf and seal


Fittings:
- 2 double wire cables with suspension and safety back-up cable
  double twin running gears
- 2 damping cylinders
- 1 radial damper
- 2 recessed handles


Special equipment:
- Complete hold-open device consisting of:
  · ___ smoke detectors,
  · 1 magnetic clamp, hold-open brake
  · 1 power inverter 220/24 V
  · 1 release key.
  Number of smoke detectors according to DIBt guidelines, issued 1988.
  · Acoustic alarm signal
- Electric drive as an opener in deadman mode


According to approval, fire protection lifting doors are suitable for 2-3 actuations per day.

Fire-resistant steel vertical lift gate
T 90-1-FSA „Teckentrup HT-E“

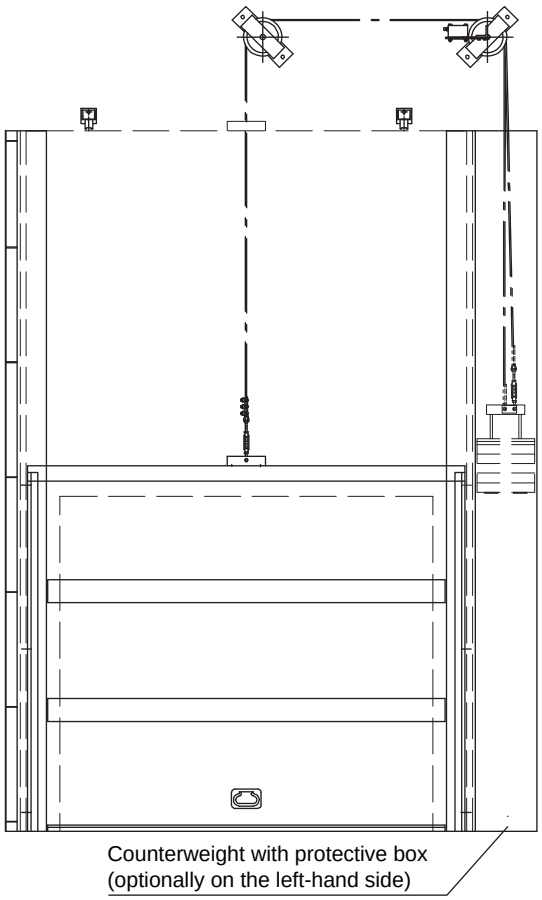

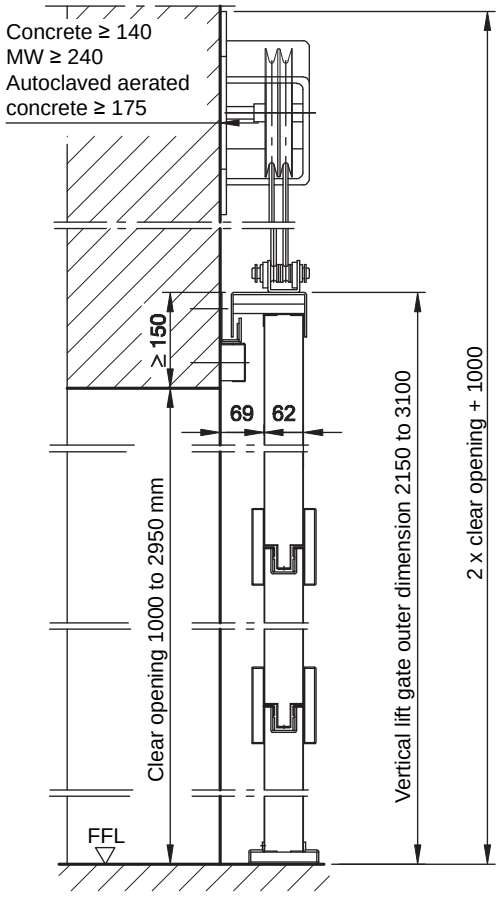

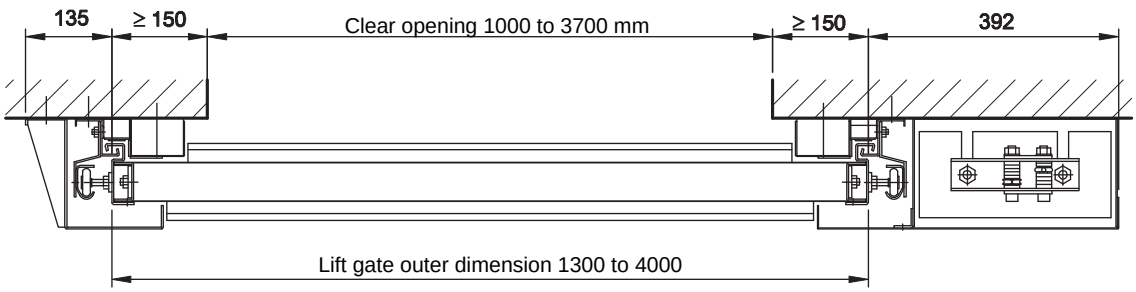

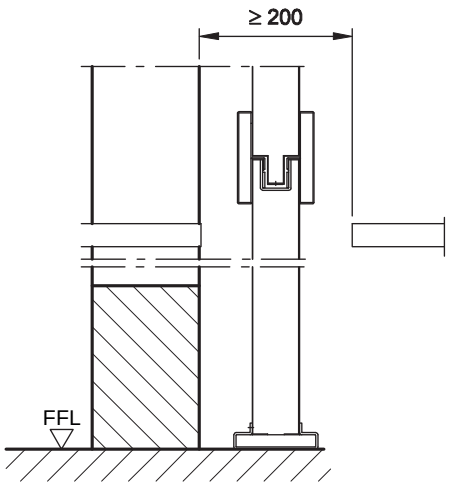

Subject to technical changes.