



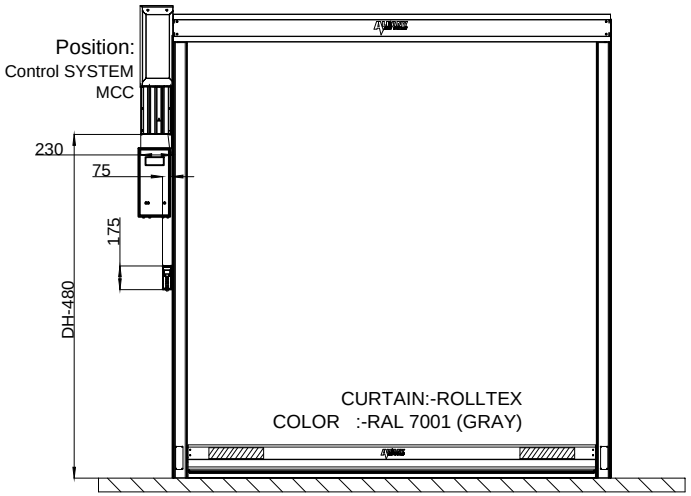


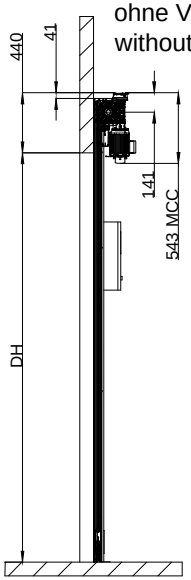


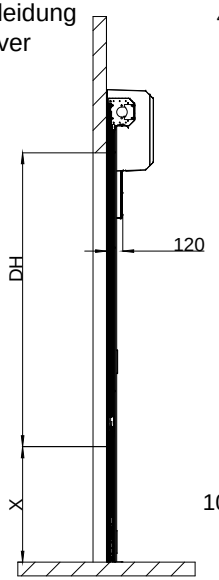

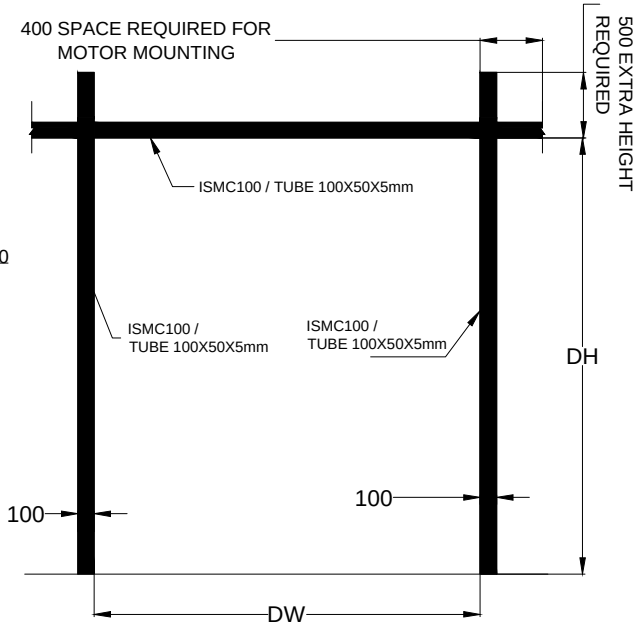

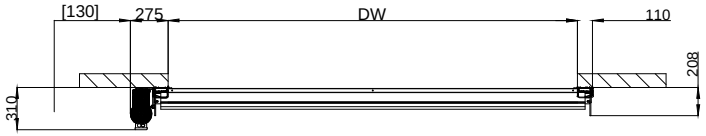

ohne Verkleidung
without cover

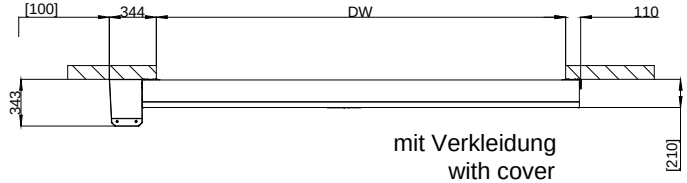

mit Verkleidung
with cover

NOTE :
1. CURTAIN : ROLLTEX.
2. COLOR : RAL 7001 (GRAY).
3. SAFETY EDGE AVAILABLE.
4. DOOR LINE (PRE RUNNING) PHOTOCELL AVAILABLE.
5. SUPPLY VOLTAGE REQUIRED : 415 VOLT, 3 PHASE (PAPL SCOPE).
6. CABLE REQUIRED : 4 CORE(PAPL SCOPE) FOR SUPPLY.
7. STD CABLE REQUIRED FOR MOTOR & PUSH BUTTON PENDENT FROM CONTROL BOX : NIHVA SCOPE.
8. STRUCTURE REQUIRED IS IN CLIENT SCOPE.
9. ALL DOOR SHOULD BE WITHOUT VISION WINDOW.

Tolerance ±3 mm (for all dimensions)

Dimensions in [ ] ==> clearance for installation

CURTAIN:-ROLLTEX
COLOR : RAL 7001 (GRAY).

SR. NO.	CLEAR WIDTH(DW)	CLEAR HEIGHT(DH)	QTY	MOTOR LOCATION	
				LEFT	RIGHT
1.	1800mm	2200mm	01 NOS		
2.	1200mm	1800mm	01 NOS		
3.	1900mm	1800mm	02 NOS		

REV NO	DRAWN	DATE	REMARK
R01	P.A	31.12.18	1. NOTE ADDED.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: HIGH SPEED DOOR RP300 & STRUCTURE

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	A.K.		24.12.18
CHECK	P.A.		24.12.18
APPV'ED	R.D.		24.12.18

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

CLIENT :- PAPL

PROJECT :-PAPL

LOCATION :- CHAKAN.

DWG. NO. :- NIHVA/18-19/0226/R01 REV.:- R01

SCALE: NTS WT: SHEET: 01 OF 01