



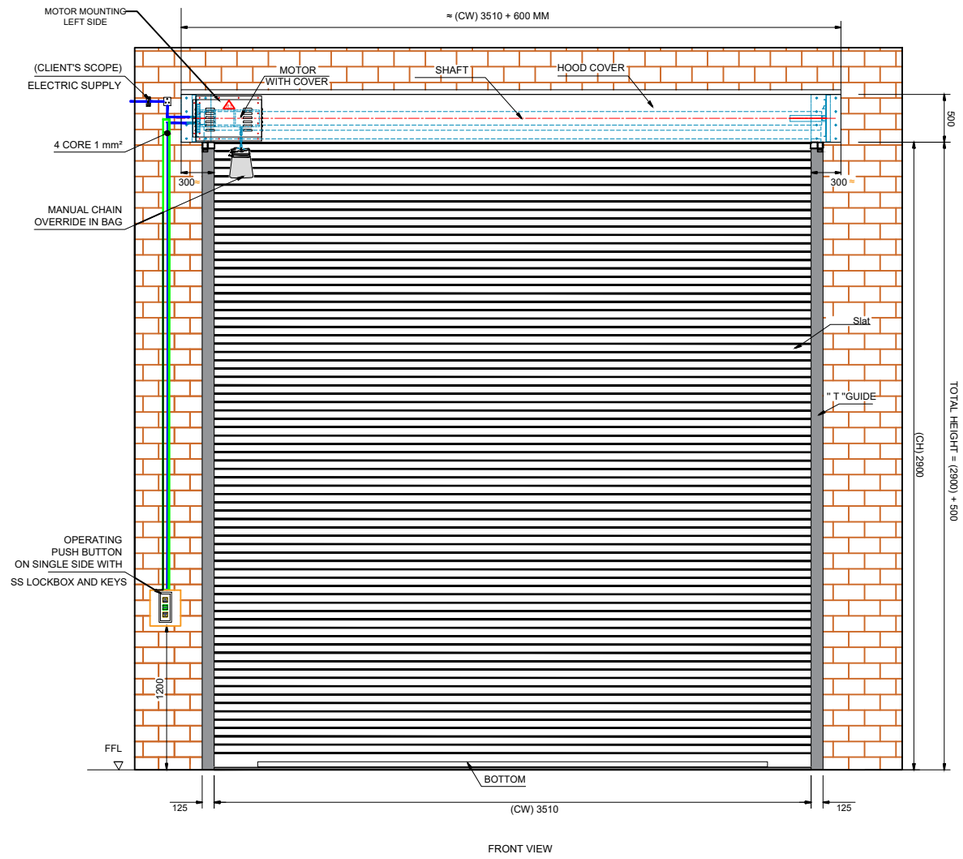

FRONT VIEW

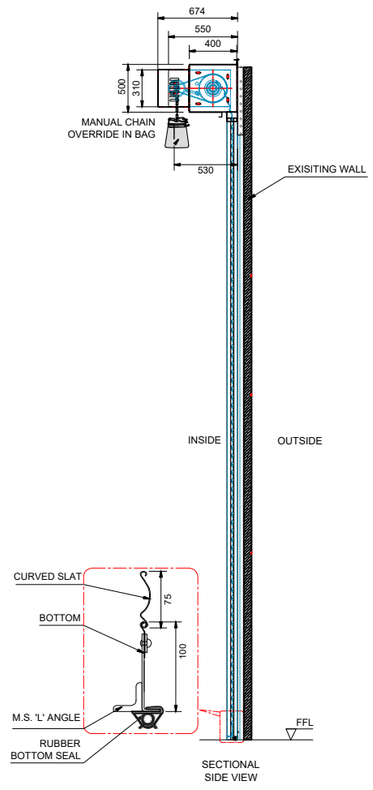

SECTIONAL SIDE VIEW

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside/Out side
3.	Mounting Surface	Side Brackets: Existing Wall With MS. tube
4.	Slat	Curved 75 mm GI Sheet - 1.2 mm Thk
5.	Bottom Profile	MS Plate 100 x 2.5 mm thick with Angle Stiffener with rubber seal
6.	Guide Profile	M.S." T " Shape profile 125 x 3.0 mm Thik.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Motor	Swift roll make
9.	Colour	Ral 7000 (one coat of zinc chromate primer)
10.	Push Botton	3 Way Push Baton on Single Side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3510 mm	2900 mm	01

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

Sr.No	DESCRIPTION	REV. NO	DATE
1.	MOTOR POSITION CHANGE RIGHT SIDE TO LEFT SIDE	REV. 01	25.11.2024
2.			

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	S.J.	05/10/2024
CHECK & APPROVAL	V.T.	22/11/2024

CLIENT - GABRIEL (CONSTRIX PVT.LTD)
PROJECT - MOTORISED ROLLING SHUTTER
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/24-25/GB/2411001 REV-01
SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm
If any queries contact : design@nihva.com