
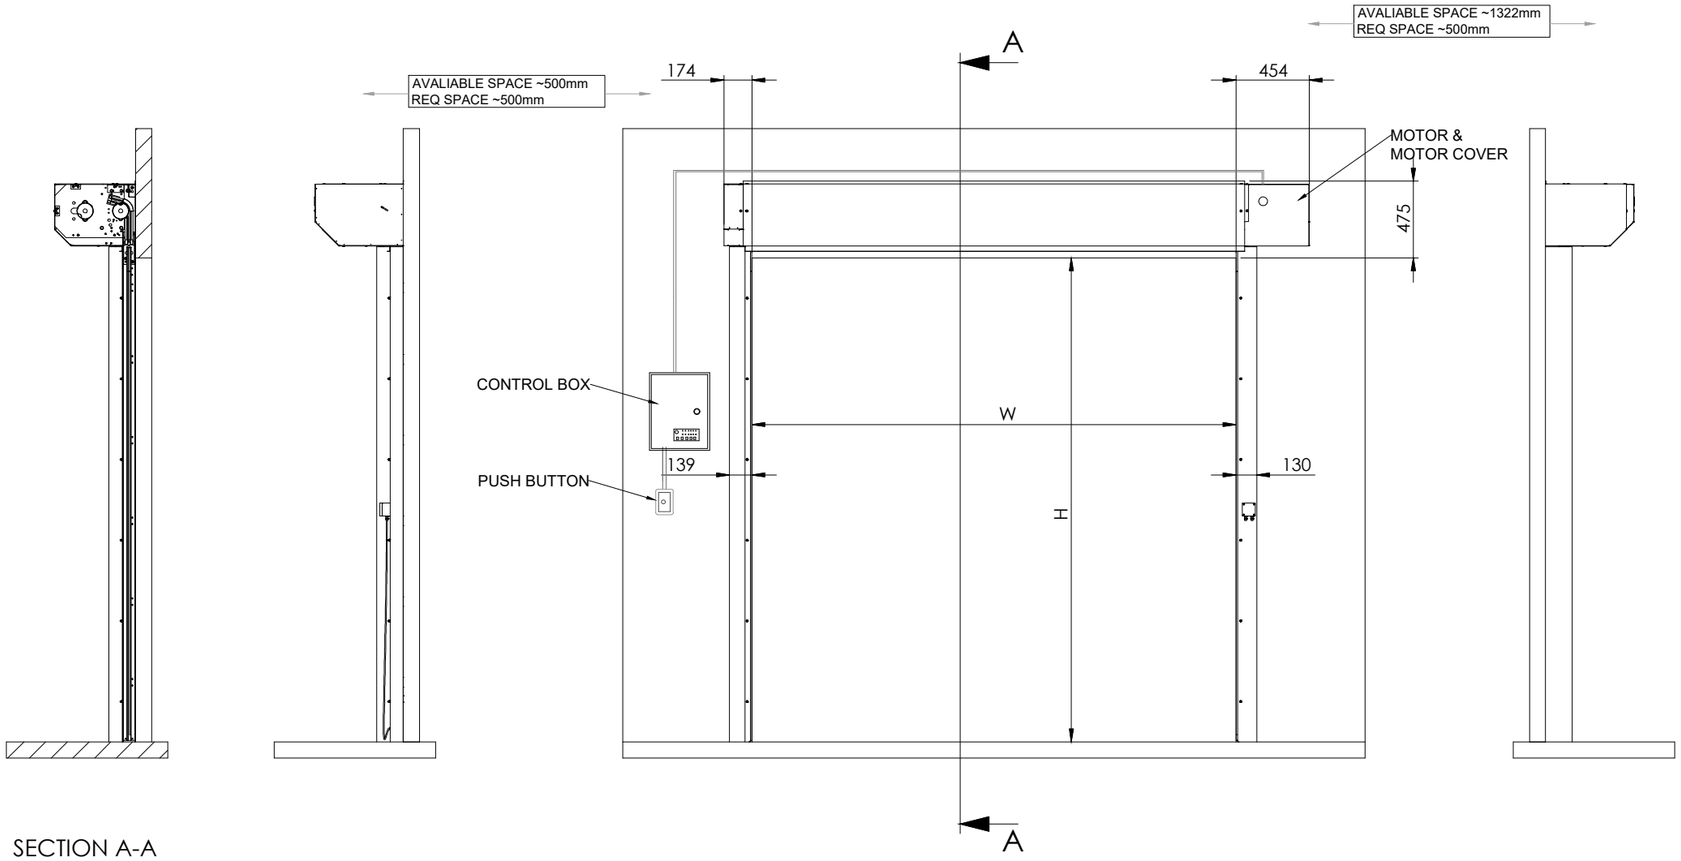


SECTION A-A

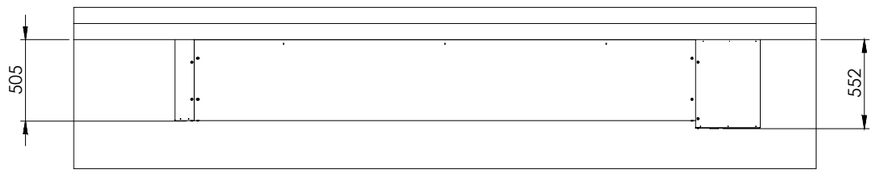

HIGH SPEED DOOR - ATEX CERTIFICATE FOR ZONE -1						
				OPENING SIZE		MOTOR LOCATION
	LOCATION	MOUNTING	QTY	W1	H1	
1	PLANT 01 (HSD 02)	INSIDE	01	2700	3500	RHS

TECHNICAL SPECIFICATION :

HIGH SPEED DOOR - ATEX CERTIFICATE FOR ZONE -1

SR.	SPECIFICATIONS	DETAILS
1	STANDARD EUROPEAN NORM AS PER	EN 13241-1
2	TYPE	SELF REPAIRING DYNACO HIGH SPEED DOOR.
3	MODEL	S-549 CAT.2 ATEX POWER CERTIFIED
4	EX	1) II 2 G EX DB EB H IA IIC T4 GB 2) II 2 D EX H IA TB IIIB T135°C DB
5	ZONE AREA	ZONE 1/ 21
6	MATERIAL	STRUCTURE STAINLESS STEEL 304 DOOR CURTAIN PVC ANTISTATIC BLACK COVERS OF THE 2 DOOR POSTS IN STAINLESS STEEL 304 (SMALL) MOTOR COVER IN STAINLESS STEEL 304 (SMALL) DRUM COVER IN STAINLESS STEEL 304 (SMALL) SHAFT + DRUM + BEARING IN STAINLESS STEEL VOLTAGE : SINGLE PHASED 230 V DYNALOGIC 5 PAINTED STEEL 500X500X250 SAFTEY EDGE EARTHING KIT + 5M CABLE
7	ANTISTATIC	ALL NON-METALLIC PARTS WITH A SURFACE LARGER THAN 20CM² ARE REPLACED BY ANTISTATIC OR CONDUCTIVE MATERIALS BOTTOM EDGE DETECTOR AND PHOTOCELLS ARE PROTECTED VIA AN INTRINSICALLY SAFE BARRIER (EX I). INCLUDES COMPLETE DOOR CURTAIN AND PULLEY IN ANTISTATIC MATERIAL
8	MOTOR POSITION	LATERAL, RIGHT HAND SIDE FROM INSIDE
9	OPENING SPEED & CLOSING SPEED	1.0 M/S
10	MOTOR	4 POLES, WITHOUT BRAKE. EXD POWER 1,5 KW-IP RATING: IP66
11	ADDITIONL ACCESSORIES	1) PHOTOCELL - 2 NOS 2) PUSH BUTTON - 2 NOS 3) PULL CHORD SWITCH - 2 NOS 4) RADAR - 2 NOS
12	FABRIC COLOUR	RAL 7038

HIGH SPEED DOOR SIZES :-

SR	WIDTH (W)	HEIGHT (H)	QTY
1	2700	3500	01

NOTE :-
1. All DIMENSIONS ARE IN MM.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE	DOOR AUTOMATION		NIHVA TECHNOLOGY PVT. LTD. PUNE
	SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD.
DRAWN	J.P	26/03/26	Email:- Sales@nihva.com Website:- www.nihva.com
CHECK	B.S	26/03/26	CLIENT - SIEGWERK INDIA PVT. LTD.
APPROVAL	V.T	26/03/26	PROJECT - HIGH SPEED DOOR
REV	00		SITE - BHIWADI
If any queries contact : Design@nihva.com			SCALE: - WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			DWG. NO. : NIHVA/25-26/180