




DRAWING

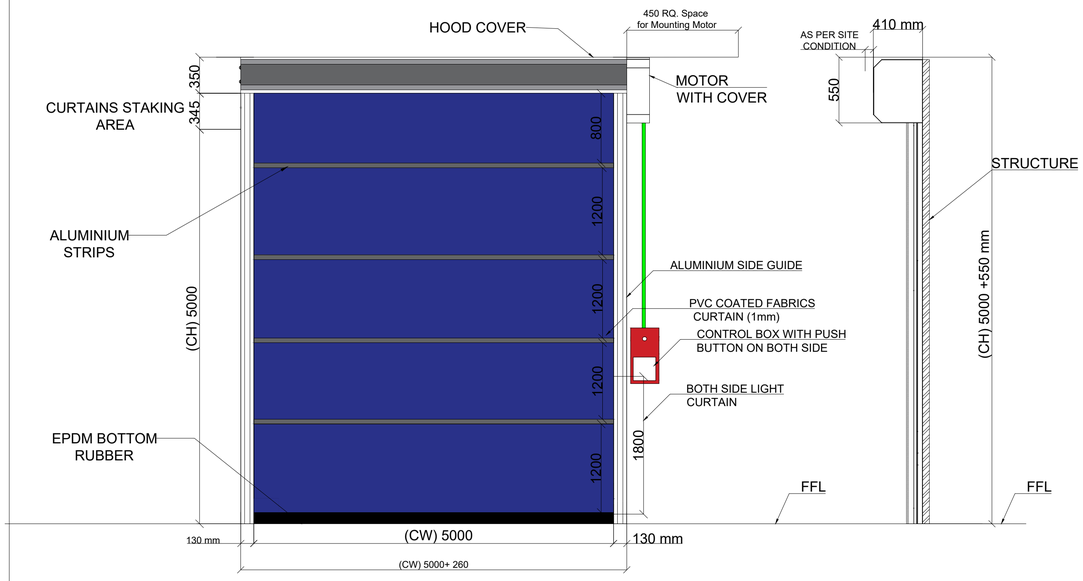

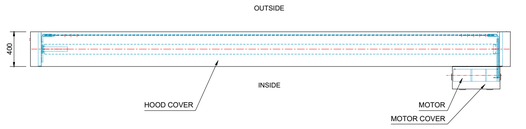

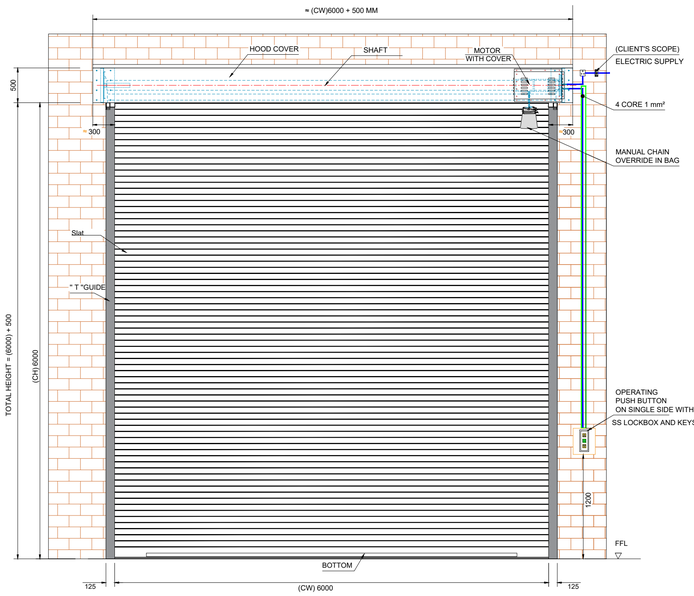



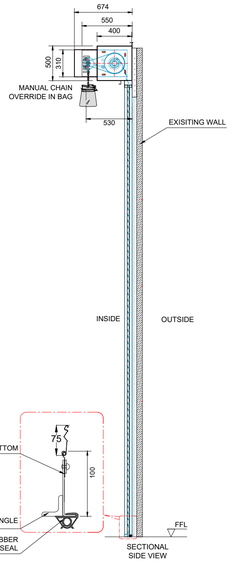

TECHNICAL SPECIFICATION ROLLING SHUTTER :-

SR.	SPECIFICATION	DETAILS
1.	SLAT	75 MM GALVALUME STEEL - 1 MM THK
2.	BOTTOM PROFILE	MS PLATE 100 x 2.5 MM THICK WITH ANGLE STIFFENER
3.	GUIDE PROFILE	M.S." T " SHAPE PROFILE 65 MM -150 x 3.0 MM THICK.
4.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM
5.	COLOR	RED OXIDE WITH COLOR

TECHNICAL SPECIFICATION HIGH SPEED DOOR :-

1.	CURTAIN	PVC FABRIC THICKNESS 1 MM
2.	GUIDE MATERIAL	ALUMINUM
3.	OPENING SPEED	UPTO 1.5 M/S
4.	CLOSING SPEED	0.8 M/S
5.	HOOD COVER & MOTOR COVER	GALVALUME STEEL
6.	EMERGENCY	CRANK HANDLE

NOTE :- ON THE SHUTTER GUIDE,WE ARE INSTALLING AN MS STRUCTURE,ON WHICH WE WILL BE MOUNTING THE HIGH-SPEED DOOR.

R01- IN THE PREVIOUS DRAWING,THE CLEAR WIDTH WAS RECORDED AS 6500 MM;THE ACTUAL CLEAR WIDTH IS 6000 MM,AS MENTIONED IN THE SITE REPORT.

SR	PRODUCT NAME	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	ROLLING SHUTTER	**6000**	**5720**	01
2	HIGH SPEED DOOR	**5000**	**5000**	01

NOTE :

SPECIAL INSTRUCTION'S :

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 287-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE		
DRAWN	B.S.		09-07-2025	PROJECT NO - NTPL- 287	REVISION - 00
CHK'D	V.T.		11-07-2025	SITE LOCATION - CHAKAN MIDC	WEIGHT - 784kg
APPV'D	V.T.		11-07-2025	MATERIAL - M.S.	QTY - 02

PRODUCT - MOTORIZED ROLLING SHUTTER

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

PROJECTION METHOD

SCALE :

SHEET 1 OF 1