



DRAWING

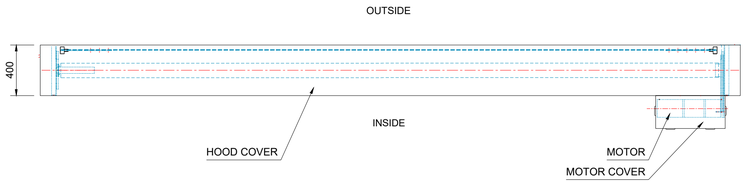



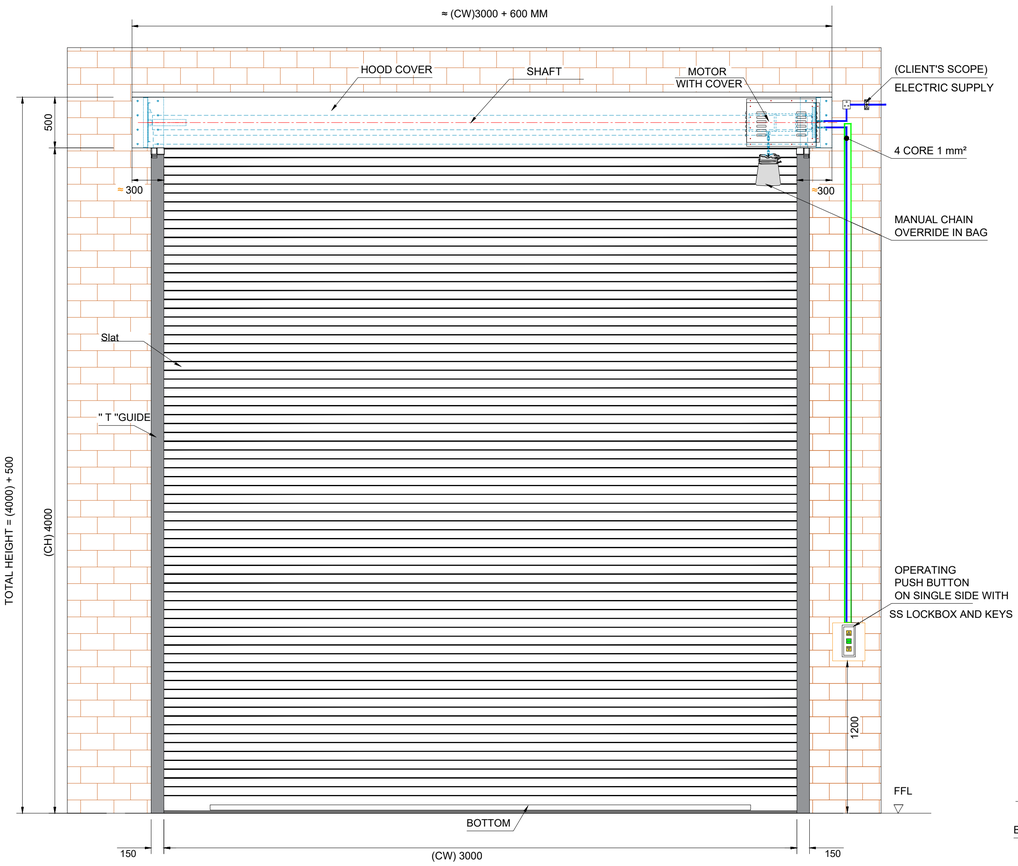

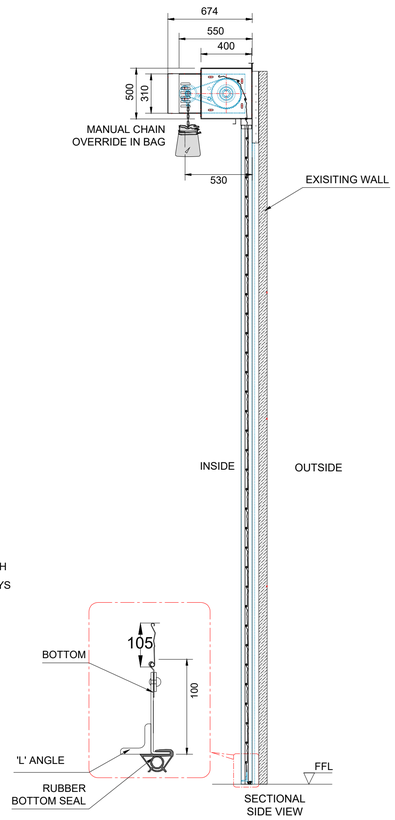

TECHNICAL SPECIFICATION:-

SPECIFICATION	DETAILS
DESCRIPTION & DRIVE	CE - CERTIFIED INDIRECT DRIVE MOTOR WITH EMERGENCY CHAIN .
LOCATION AREA	INSIDE
MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL+ON CONCRETE/STEEL&SIDE
SLAT	CURVED 105 MM GI SHEET - 1.2 MM THK
BOTTOM PROFILE	GI BOTTOM PROFILE WITH EPDM RUBBER SEALING
GUIDE PROFILE	M.S."T" SHAPE 65 MM - 150X3 MM THK .
HOOD COVER & MOTOR COVER	MADE OF MS SHEET THICKNESS 1.2 MM.
COLOUR	ONE COAT OF EPOXY PRIMER (DFT - 50±5 MICRON) AND TWO COATS OF EPOXY PAINT - RAL 7016 (DFT - 50±5 MICRON)
PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	6500 mm	6000 mm	02

IMPORTANT NOTES:-

1. THIS IS MOTORIZED ROLLING SHUTTER, HENCE NO NEED OF SPRING & BALL BEARING.
2. LOCKING PROVISION FOR MOTORIZED ROLLING SHUTTER , IT IS NOT FEASIBLE TO PROVIDE AN INTERNAL/EXTERNAL LOCK ON THE BOTTOM PROFILE DUE TO SAFETY CONCERNS.
3. STORM ANCHORS & SEALS ON GUIDE NOT NEEDED.

NOTE :

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 000

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE		
DRAWN	V.W.		16-07-2025	PRODUCT - MOTORIZED ROLLING SHUTTER	
CHK'D	B.S.		17-07-2025	PROJECT NO - NTPL- 000	REVISION - 00
APPV'D	V.T.		17-07-2025	SITE LOCATION -	WEIGHT -
				MATERIAL -	QTY -
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'		A2			SHEET 1 OF 1