easyE-50 - Standard stroke lengths

3D View


Order number: **EEL50-250G24C200003M**

HUB (Stroke length / mm)	250
HUBST (Rod position / mm)	250
G (Gearing)	G (4500N – 6mm/s)
V (Voltage)	24VDC
B (Brackets)	AISI316
SIP (Steel IP)	Steel, IP66
N (Noise reduction)	no
H (Hall)	no
CL (Cable length / m)	3
CN (Connector)	Molex Minifit
CNSMASSEXACT (Weight / g)	3420
CNSORDERNO (Order number)	EEL50-250G24C200003M

www.cad.bansbach.de

Bansbach easylift GmbH
Barbarossastraße 8
D-73547 Lorch
Tel. +49 (0) 7172/9107-0
Fax +49 (0) 7172/9107-44
info@bansbach.de
www.bansbach.de


easyE-50 - Standard stroke lengths

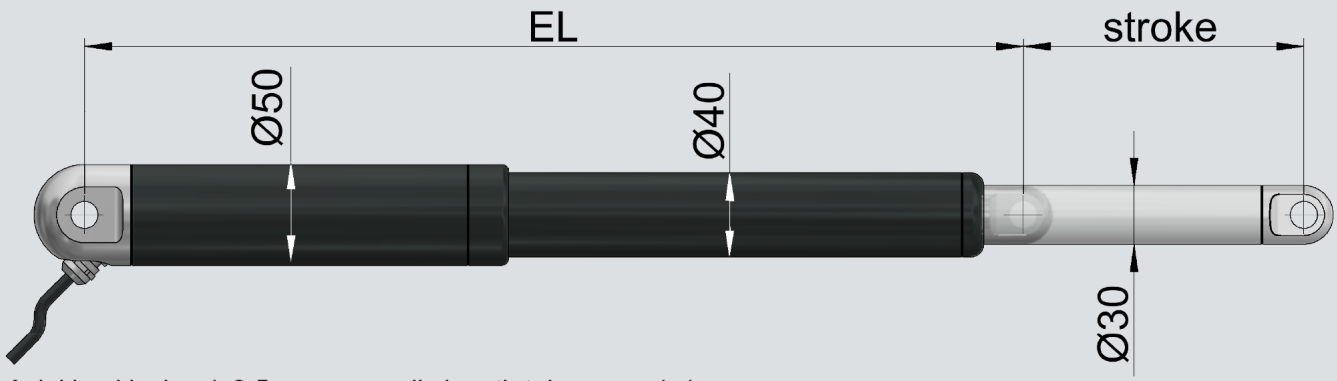



Axial backlash: +/- 0,5mm, generally length tolerance +/- 1mm


	EL	Clevis rear	Hall	UL/ EN60.601	harsh env.	Emergency lowering/spline
Gear ratio: C, D, E, F Gear ratio: G, H	stroke + 240* stroke + 255*	-	+15	+15	+14	+25 / +6

*If stroke > 750mm: EL + 100mm
Max. load limited for stroke >400mm: 2000N

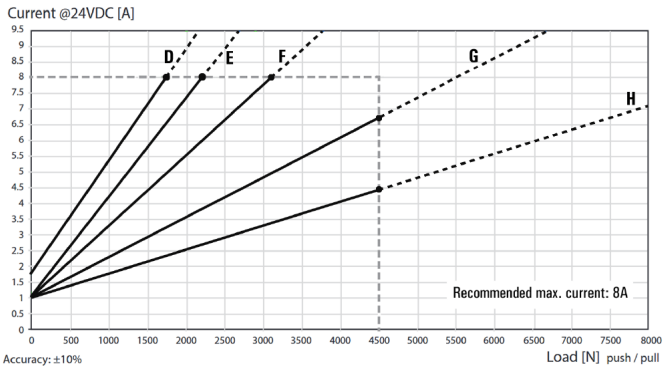

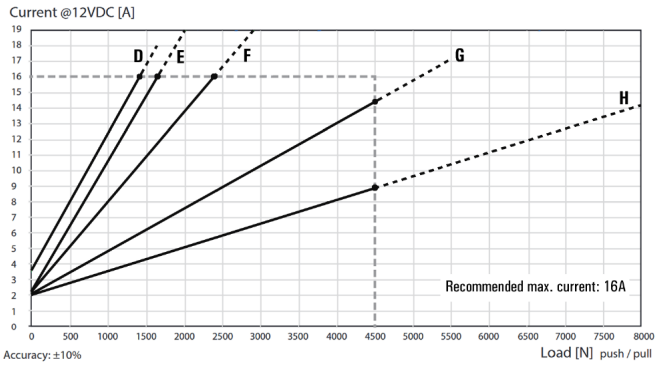

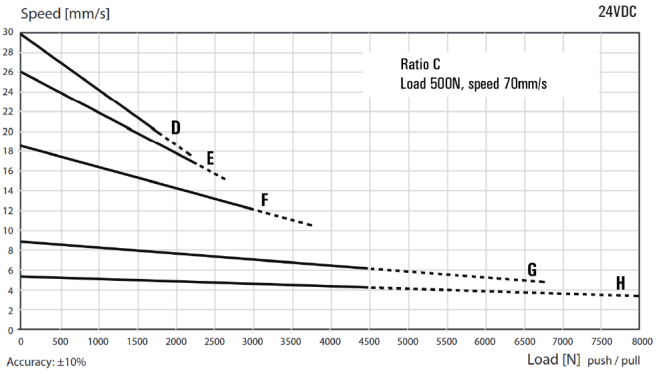

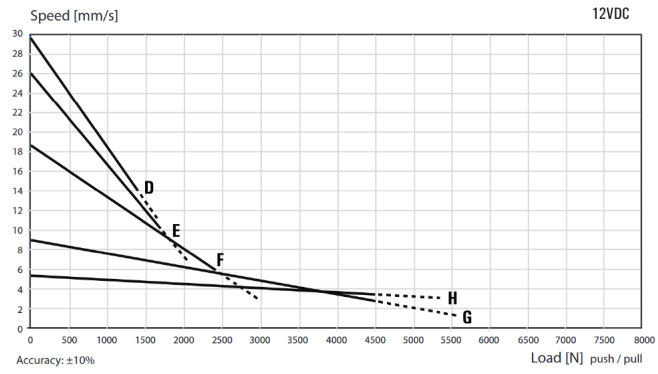

www.cad.bansbach.de

09/06/2022 06:51

Bansbach easylift GmbH
Barbarossastraße 8
D-73547 Lorch
Tel. +49 (0) 7172/9107-0
Fax +49 (0) 7172/9107-44
info@bansbach.de
www.bansbach.de