


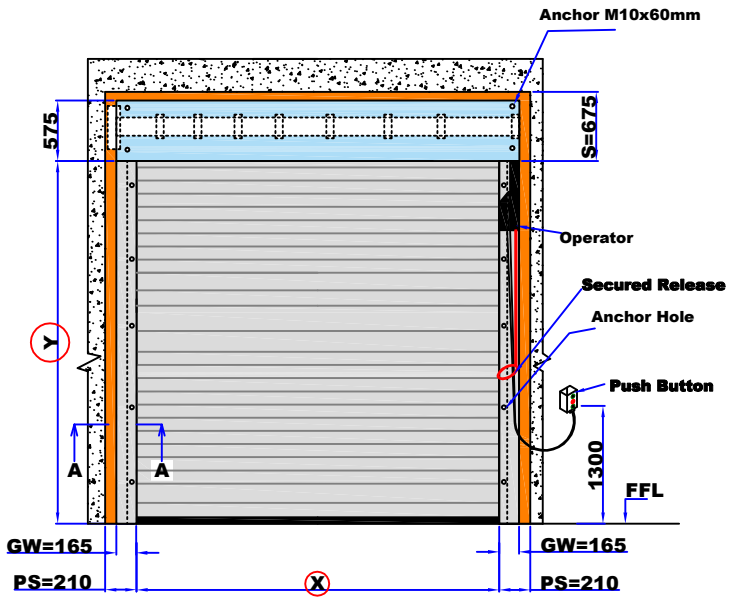





SECTION DETAIL'S




SECTION DETAIL'S
'A'A'



GW = Guide Width
ET = Min. fitting depth
(1.5 times of Cover width)
S = Required Head room.
PS = Side space for cover removal & maintenance purpose
C= Cover(450x450)

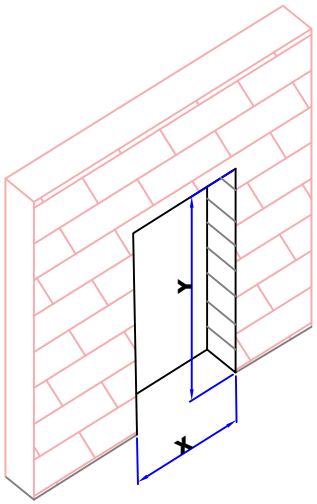

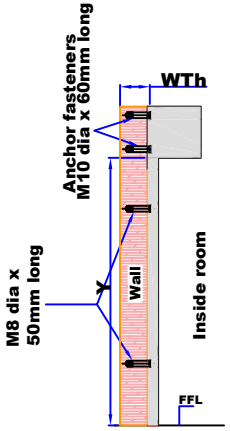

Concrete: Strength class C 20/25
Thickness 140 mm
Standard EN 206-1

Brickwork: Strength class 12/mortar group II
Thickness 240 mm
Standard DIN 1053-1

Door no.	✓/x

FIXING ON BRICK WALL/CONCRETE

Door no.	Clear X-width	Clear Y-Height	Qty.s	Motor side R or L	Colour RAL 9002
1	3000	3500	1		
2	2900	3530	1		
3					
4					
Total			2		

STANDARD ACCESSORIES:

1	Surface Mounted Push button	1 No Per Door

OPTIONAL ACCESSORIES: YES/NO

Surface Mounted Push button	
Controller 360	

Client scope

1) 16A 5 Pin Industrial type female socket Modal No:- 230V, 50Hz, with earth around 1/2 Meter From Controller/Operator
2) Clean Uninterrupted Power Supply WithOut Voltage Fluctuations Needed
3) Solid State Inline (UPS/Stabilizer) 2kva Capacity Required

Notes:
1) Operator is Always on Right side as Standard
2) Controller is Always On Operator Side
3) Steel Structure Procurement,Fixing and Strength is Client Responsibility (Minimum Dimensions are Shown in the Drawings)
4) Puff Panel Anchor bolt Length Would Change as based on Panel Thickness
5)Please Put ✓ Mark For Applicoble `X` If Not Required
6)For vision Panel Locations Follow The Brochure Standes Only

Note:All Doors To Be Fixed From The Inside Only

TITLE:ROLLING SHUTTER-SB (SPRING BALANCE)

DRAWN BY: N .R
CHECKED BY:T.R.B
APPROVED BY:

CLIENT :M/s.NIHVA Technologies Pvt Ltd.

DRAWING NOT TO SCALE

D R G. N O.9504 REV 1

Ref :

All Dimensions are in mm unless or otherwise specified

DATE:10-04-2018