
NIHVA

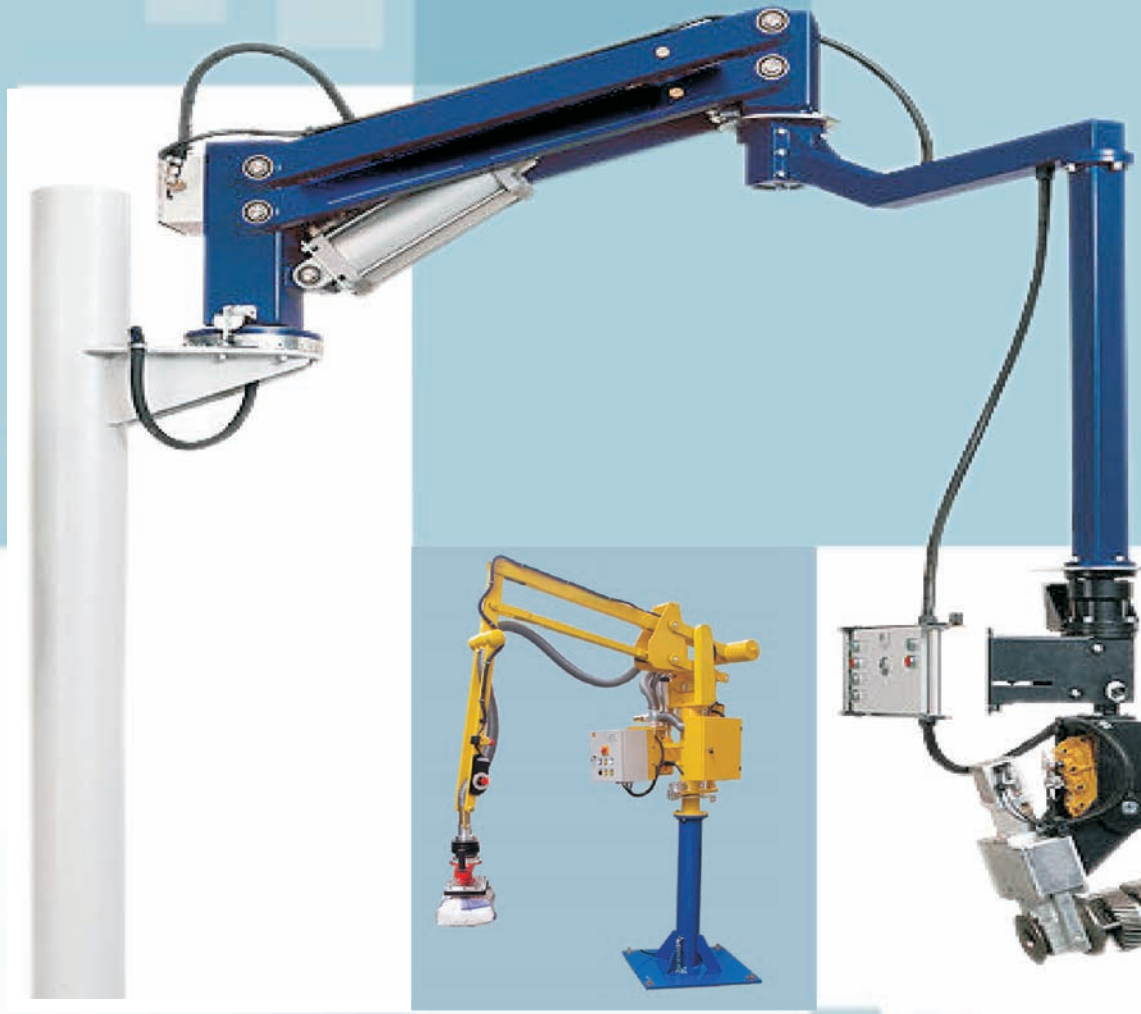

Manipulator

We Make Possible

www.nihva.com

MANIPULATOR devices are pneumatic articulated arm balancers in the ultimate load classes 50 kg to 300 kg with a max. Working radius upto 3000mm and a lifting range of 1500mm as standard features. Due to the specially designed lifting cylinder connection, we achieve a consistent balancing performance in the entire lifting area. The Manipulator can be operated as pillar device, hanging device or as a device that can be moved within the rail system. The devices can be combined easily or can be upgraded with different modules.

All gripper models (mechanical, vacuum, magnetic, tilt, rotary axis, etc) with pneumatic control models can be combined as well. Due to this extraordinary level of flexibility, each Manipulator can be modified in accordance to the specific application to achieve optimal performance



Specifications

- Compact construction.
- Smooth running for up and down motions
- Easy maintenance.
- Capacities from 50 to 300 kg.
- Pneumatic Brake in All Three Swivel Points
- All Pneumatic Balance Control can Accommodate
- Three different style of mounting
  a) Floor
  b) Over head Trolley
  c) Overhead fixed
- Equipped with precision bearings & components


Area of Applications


- Seat Handling
- Battery Handling
- Door Handling
- Tire Wheel Handling
- Other Mechanical Assemblies
- Cyl. Head & Block Handling
- Any Lifting Area


Technical Data

- Maximum Lifting Capacity.(Inclusive of Gripper weight.) : 300 Kg @ 6 bar air
- Maximum lifting Stroke : 650 mm – 1200mm
- Lifting speed: approx. 30 m/min.
- Lowering speed: approx. 30 m/min.
- Working radius (max) : 1650 mm – 2200mm
- Rotation around the main column. : 360°.
- Working air pressure: 6 bar.
- Air consumption per double stroke : 20 NL – 30 NL
- Noise generation : < 70 dB
- Working range Temperature – 0 to 50°C
- Equipment weight :Approx. 110 kg
  Approx. 300 Kg
  Approx. 400 Kg
  Approx. 475 Kg

Floor Mounted

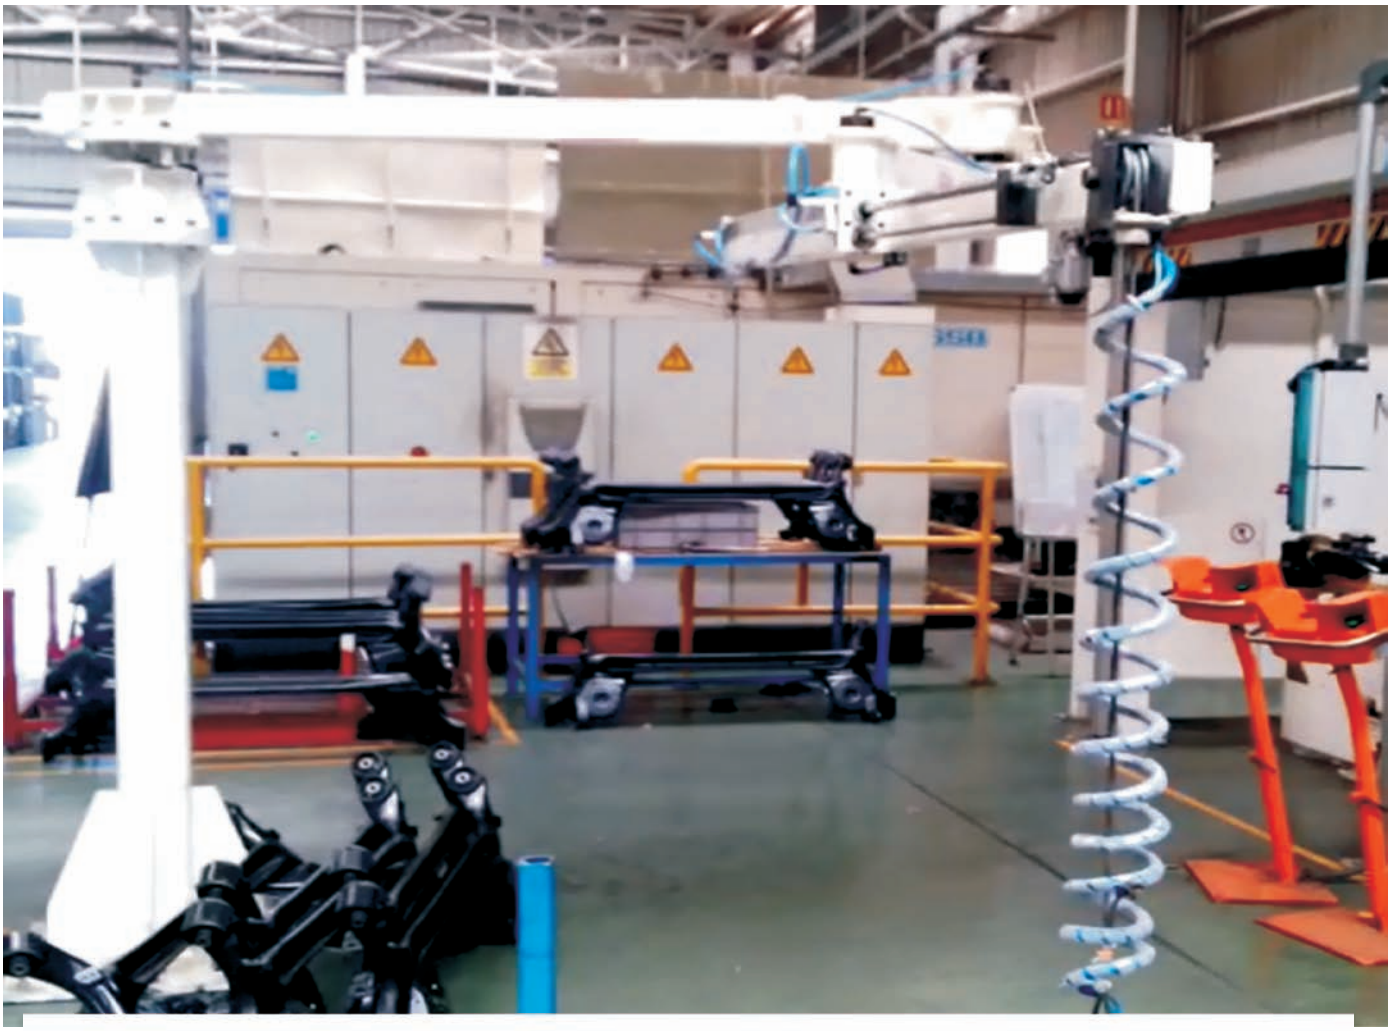


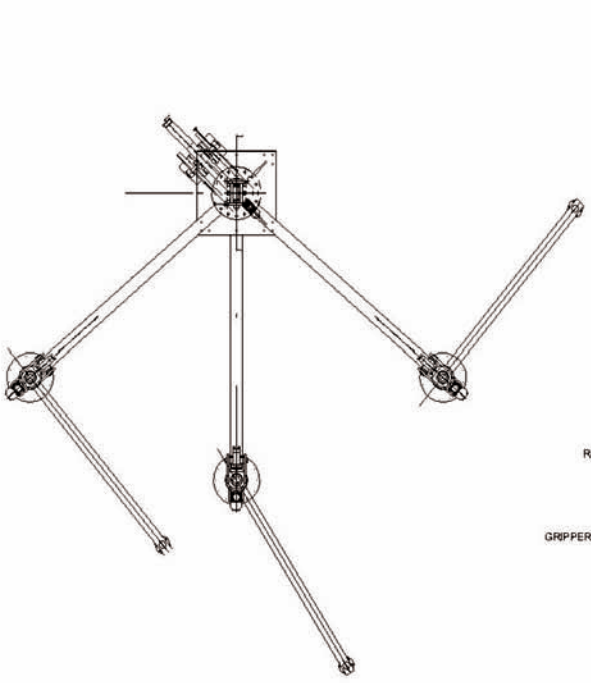

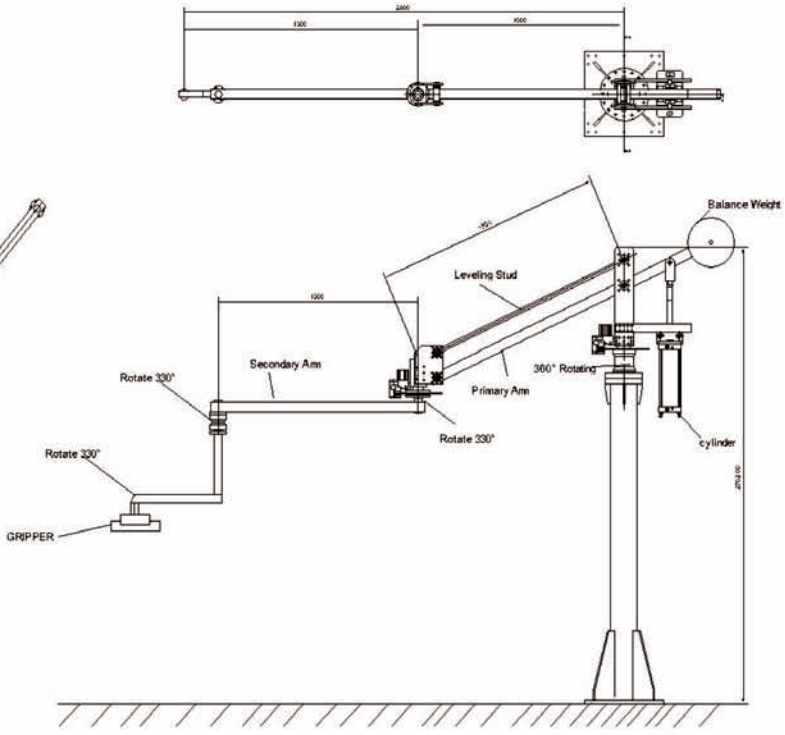

Rail Mounted



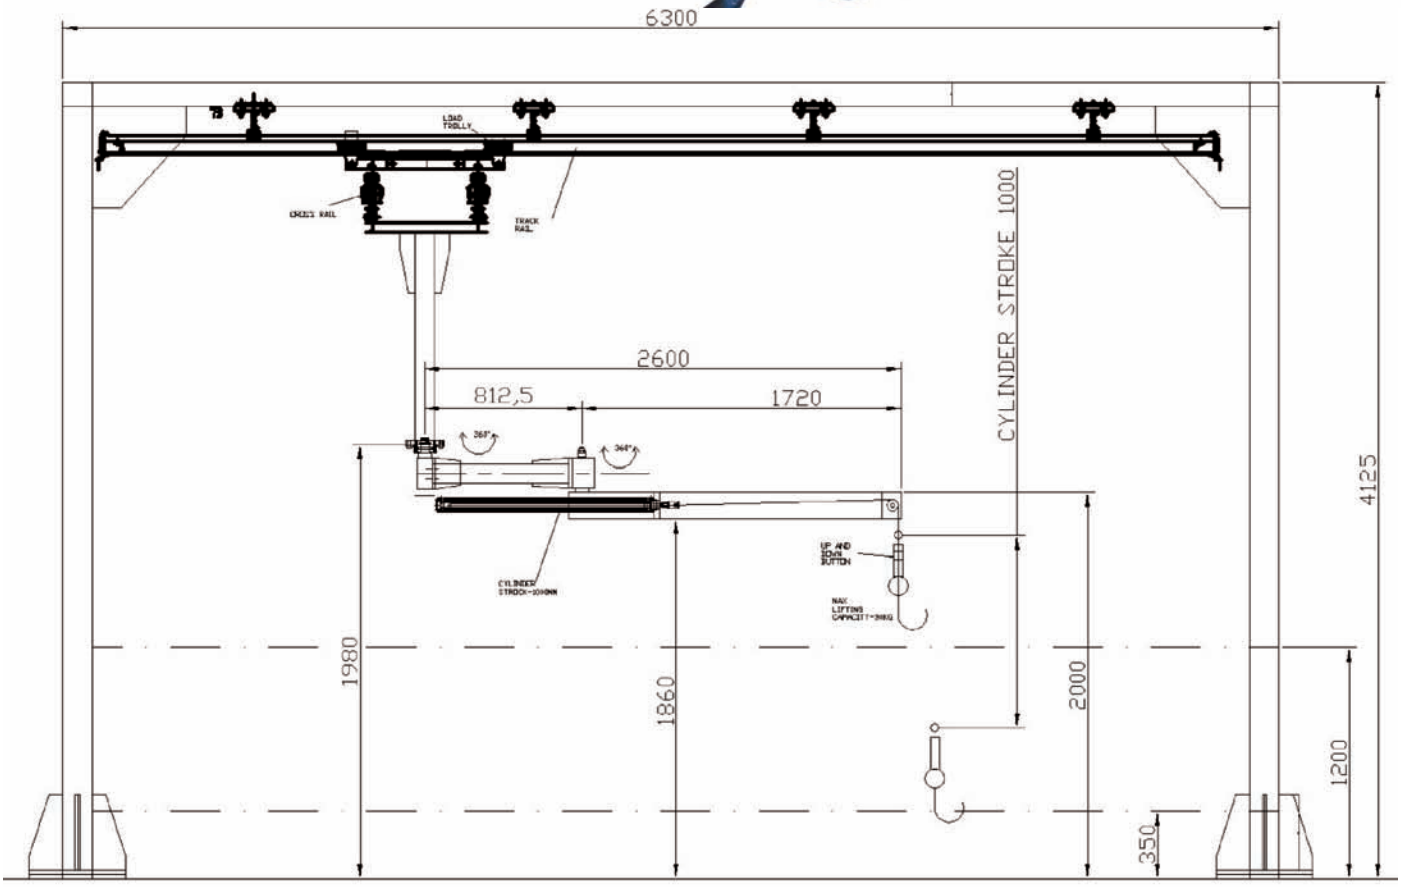

NIHVA

Automation Solutions	Material Handling Equipments	Door Automation
Automation Solutions	Dock Levellers	High speed doors / Sectional doors
Pick & Place Machines	Scissor lifts / Mobile ramp	Sliding doors / Folding Doors
SPM	Dock Shelters / Dock Seals / Dock House	Fire rated - Mot. Rolling shutters / Sliding doors
Wireless Automation (M2M)	Goods Lift	Hanger Doors / Extra large opening doors
Automation Softwares	Spiral Conveyors / Belt Conveyors	Boom barriers / Turnstiles / Bollards
Grease / Oil Separator	Telescopic Conveyors	Sliding / Cantilever Gates

International Business Partners

ALBANY ASSA ABLOY | MEGADOOR ASSA ABLOY | Crawford ASSA ABLOY | besam ASSA ABLOY | ACO

Head Office: G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019

NIHVA

NIHVA Technologies Pvt. Ltd.

+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com

NETWORKS

WEST	NORTH	SOUTH	EAST
Pune I Mumbai I Nashik I Nagpur Indore I Ahmedabad I Surat I Vadodara	Delhi I Chandigarh	Chennai I Hyderabad I Bengaluru	Kolkata I Bhubaneshwar