

# General drawing RapidRoll® 300 Plus Stainless Steel





without cover

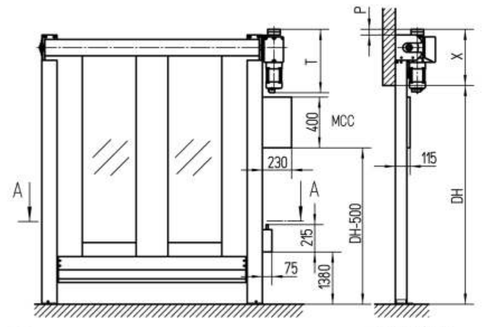



motor cover




motor and top roll cover
stainless steel - 30°/15°





without cover




with cover

A-A

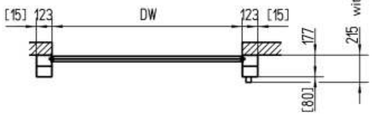


with emergency lever

| | Without motor cover |
|---|---|
| | ACS 50/MCC[VectorControl] without control |
| X | 443 |
| V | 285 |
| R | 315 |
| T | 500 |
| P | 45 |

| Available sizes | | DW | DH |
|---|---|---|---|
| | min.* | 1000 | 1000 |
| | max.** | 4000 | 4200 |
| | | | |
| Crash* | min.:* | 1300 | 1000 |
| with Top 1,3 mm** | max.: ** | 3500 | 3500 |

| | with motor cover | | |
|---|---|---|---|
| | Plastic | Steel | Stainless steel |
| Y | 470 | 465 | 515 |
| W | 366 | 362 | 362 |
| S | 340 | 340 | 340 |
| U | 610 | 600 | 650 |
| Q | 70 | 65 | 18(30°),115(0°) |


| Control Unit | | ACS 50 | MCC[VectorControl] |
|---|---|---|---|
| Opening speed | max.(m/s) | 1,2 | 2,2 |
| Closing speed | max.(m/s) | 1,2 | 0,9 |
| Dimensions WxHxD | mm | 300x400x210 | 220x380x100 |

NIHVA
Zg.-Nr. 8300R0020/9
Date: 28.08.2012

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

www.assaabloyentrance.com

# Fixing plan RapidRoll® 300 Plus Stainless Steel

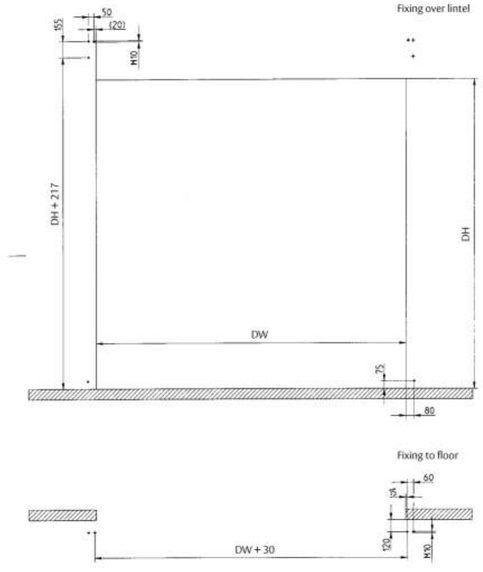


ASSA ABLOY Entrance Systems
**Albany Door Systems**

NIHVA
NIHVA Technologies Pvt. Ltd.

**www.albanydoors.com**

**QR-Code**
Get further information by scanning the QR-code with your smartphone and an appropriate application.

64 05 R 0985[12]12 EN Technical data subject to change without notice ©ASSA ABLOY Entrance Systems AB. All rights reserved.

# RapidRoll® 300 Plus Stainless Steel

## Economical door for a wide variety of interior applications

Technical data sheet

ASSA ABLOY, the global leader in door opening solutions



NIHVA

# RapidRoll® 300 Plus Stainless Steel



## DOOR MATERIAL

The Door (side frames and top roll cover) are made of stainless steel.

## DOOR CURTAIN

As standard the door is equipped with a transparent PVC curtain with blue reinforcement stripes. As option the reinforcement stripes are available in the RAL colours red (RAL 3002), orange (RAL 2011), grey (RAL 7035), yellow (RAL 1021), beige (RAL 1014), green (RAL 6018) and white (RAL 9016). Curtains with silicone-free reinforcement stripes are also available.



## ALTERNATIVE CURTAINS

In case of a higher demand more durable curtains made of RollTex® with or without window in the colours orange (RAL 2009), blue (RAL 5002) or grey (RAL 7001) as well as Norma Tex® with stripes in grey (RAL 7045) are available.



## ACTUATORS

Individual applications can include additional safety devices. Actuators such as infrared, radar detectors, push buttons, vehicle detector loops or radio transmitters can be added to the control system. Please contact us for additional information for your specific needs.

## KNOCK-OUT CAPABILITY

The door can be equipped with a knock-out capability option. In the event of a collision the bottom profile breaks-away, causing a sensor to stop the door. The door can be easily reset by hand. Doors with knock-out capability option include coiled cable.



## SAFETY FEATURES

The door has an electrical safety contact edge. A standard in-line photocell prevents the door from closing when an object is in the doorway. An optional integrated light curtain is available for doors with a minimum height of 1865 mm. The light curtain is not available in combination with a knock-out capability.



## RAPIDROLL® 300 PLUS STAINLESS STEEL ESCAPE AND RESCUE ROUTES

The RapidRoll® 300 Plus Stainless Steel can be amanded to a high performance door for escape and rescue routes to a max of 4000 x 4000 mm by adding special equippment.



Monitoring devices such as a radar motion control, automatic self opening and a regular test run are features for this door type.

## TOP ROLL COVER [1]

The top roll cover is not a standard door feature.

Delivery of the Escape and rescue routes version includes a top roll cover

Optional the top roll cover is available in stainless steel.

## MOTOR COVER [1]

A motor cover is not a standard door feature.

An optional motor cover is available in plastic RAL 7040 or stainless steel.



## MOTOR POSITION

Available left or right hand side.

## CONTROL BOX

As standard the door is equipped with an ACS 50.

The frequency converter control is optionally available and is installed underneath the motor requiring little space. The control panel for the MCC is equipped with a convenient foil keypad and a graphic display, providing extensive error messages. It is either installed on the side frame or on the wall.

Illustration shows MCC control.



## SELF OPENING

Manual or automatic egress opens the door up to 2.0 m in the event of a power failure. The door also opens automatically when the main switch is moved.



## BOTTOM PROFILE / FLEX EDGE

As standard the bottom edge is made of aluminum. Optionally a bottom edge made of stainless steel is available.

One further option is our Flex Edge Version (flexible bottom profile without aluminum extrusion and coiled cable).



# High performance door RapidRoll® 300 Plus Stainless Steel

ALBANY ASSA ABLOY

### ADVANTAGES OF ALBANY RAPIDROLL® 300 PLUS STAINLESS STEEL

- Space saving design enables installation into door openings with restricted space.
- Door curtain is constructed with transparent PVC and reinforcement stripes. Chemical and puncture resistant RollTex® fabric is available for more demanding applications (optional).
- Integrated balancing systems allows self opening.

### APPLICATION

- As an interior door to separate work areas
- For climate control and energy conservation
- In protected exterior applications
- In applications with strict hygiene requirements, the PVC curtain is easy to clean
- In distribution and warehouse applications

### DESIGN

Self supporting side frames and top roll covers are made of stainless steel. Top roll is made of aluminum with ball bearings at both shafts.

### DOOR CURTAIN

The door curtain is made of clear PVC material with reinforced vertical stripes (optional colors are available). RollTex® fabric is available for applications needing a more durable curtain material. The door curtain is equipped with special wind tabs that travel in the side frame guides and gives the RapidRoll® 300 Plus remarkable wind resistance.

### KNOCK-OUT CAPABILITY

The RapidRoll® 300 Plus can be equipped with a knock-out capability. In the event of a collision the bottom profile breaksaway, causing a sensor to stop the door. The door can be easily reset by hand.

### DRIVE UNIT

The drive unit is a gear motor and can be positioned on the right or left side of the door.

### CONTROL SYSTEM

The door comes as standard with an ACS 50 contactor control system. As option the frequency converter control system MCC$^{\text{VectorControl}}$ is available.

### SELF OPENING

- Manual activation: the door can be opened by manually releasing the brake on the balancing system.
- Automatic activation (option): the door opens automatically in the event of a power outage. Depending on the size the door opens completely or partly (up to approx. 2.0 m). The door also opens automatically when the main switch is moved to zero.

In both cases the springs of the balancing system are released and the door opens to a maximum height of approximately 2,0 m (depending on the size).

### SAFETY FEATURES

The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1.

### INDICATION OF RISK

The security of the door is designed for normal use and for vehicles in an industrial environment corresponding to the harmonised CE-Guidelines. In consideration of the on site situation – especially in case of pedestrian use – additional safety measures, such as additional actuators may be required. In addition, special environmental conditions may impact the choice of door type. For more information or to schedule an on-site inspection, please contact our sales engineer.

• Option
✓ Standard
– not possible

[1] For doors of height ≤ 2500 mm the use of top roll and motor cover is required according to standard EN 13241-1.
[2] Not in combination with knock-out capability.
[3] 16 A for 220/230V
[4] 10 A preferred, 16 A maximal
[5] Transformer necessary for 440/480/500V
[6] Transformer necessary for 220/230/500V

## TECHNICAL DATA

| | |
|---|---|
| **Interior door** | suitable |
| **Exterior door** | partially suitable |
| **Wind resistance** | class 1 (EN 12424) |
| **Door dimension (mm)** (DW min./max.) (DH min./max.) | For details please note general drawing! 1000 / 4000 mm 1000 / 4200 mm |
| **Opening direction** | vertical |
| **Surface** | |
| Side frames, stainless steel | ✓ |
| Bottom profile, aluminium anodised | ✓ |
| Bottom profile, stainless steel | • |
| Top roll | aluminium anodised |
| **Covers** (option) | |
| Top roll cover | •[1] |
| Motor cover | •[1] |
| **Door curtain** (alternatively) | |
| PVC with blue/red reinforcement stripes | ✓ |
| PVC with coloured reinforcement stripes | • |
| PVC with silicon free reinforcement stripes | • |
| RollTex® Plus* | • |
| RollTex® Original* | • |
| NomaTex® */** | • |
| * optional with windows | • |
| ** optinal with vision panels | • |
| **Wind tabs** | ✓ |
| **Curtain tension** | • |
| **Counterbalance** | ✓ |
| **Drive unit** | electrical |
| **Control systems** | |
| ACS 50 | ✓ |
| MCC$^{\text{Vector Control}}$ | • |
| **Safety** | |
| Electrical safety contact edge | ✓ |
| Door line photocell | ✓ |
| light curtain (integrated) | •[2] |
| Fall down protection | ✓ by tension springs |
| Knock-out capability | • |
| Manual activation | ✓ with bowden lever |
| Second bowden lever | • |
| Automatic egress | • |

| **Speed (m/s)** | **ACS 50** | **MCC$^{\text{Vector Control}}$** |
|---|---|---|
| Open/close to max. | 1,2/1,2 | 2,2/0,9 |
| Fuse protection | 10 A [3] | 10 A [4] |
| Control voltage | 24 V DC | 24 V DC |
| Protection | IP 55 | IP 55 |
| Motor power / kW | 0,75 kW | 0,75 kW |
| 3(L(N)PE/220/230/380/400/415V; 50 Hz | ✓[3] | |
| 3(L(N)PE/380/400/415/440/480V; 50/60 Hz | | ✓[6] |
| Potential free contacts max. 250 V | ✓ | • |
| **Traffic light function** | **ACS 50** | **MCC$^{\text{Vector Control}}$** |
| Without direction detection | ✓ | ✓ 24 V DC |
| With direction detection | – | ✓ 24 V DC |
| Flashing alarm light | ✓ | ✓ 24 V DC |
| Error message | ✓ LED | ✓ plain text |

NIHVA