

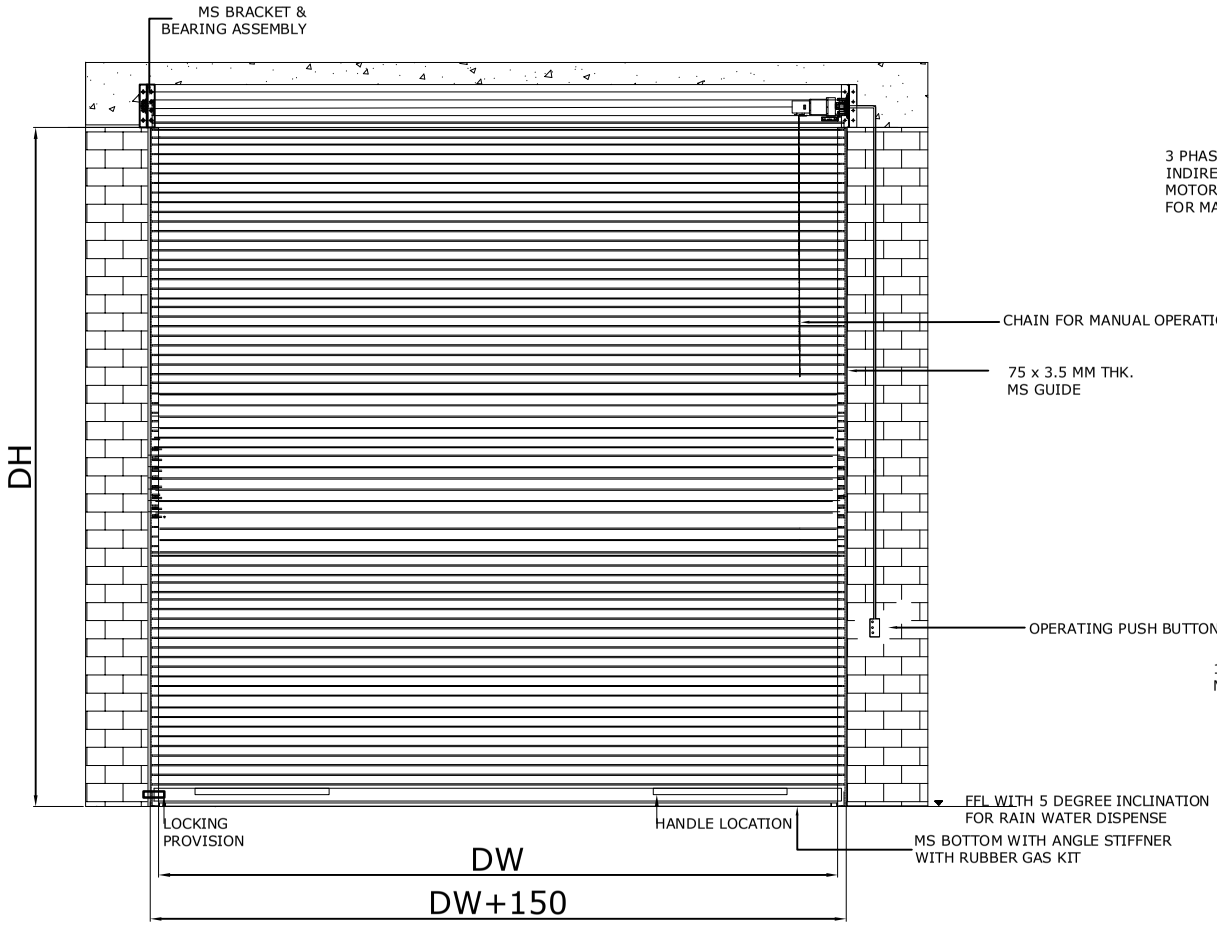



**ELEVATION**

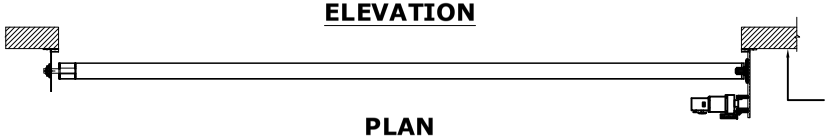

**PLAN**

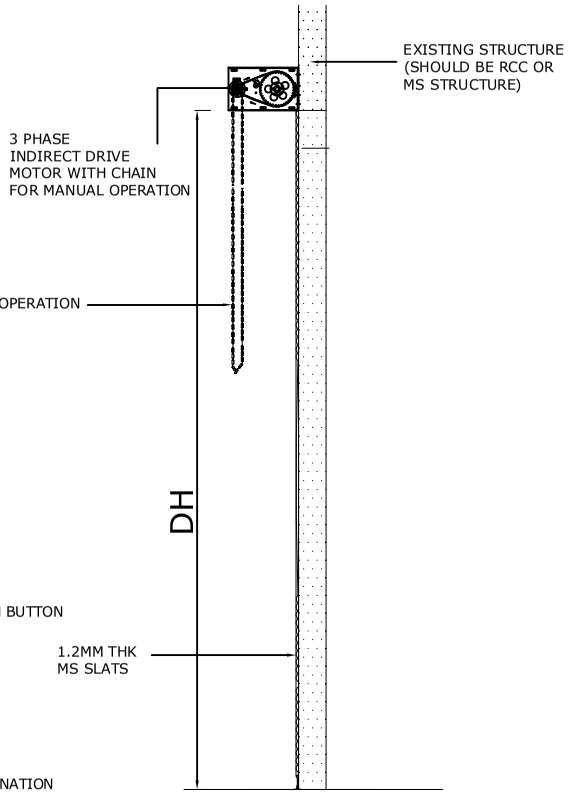


**SIDE VIEW**

| DW<br>Shutter Width | DH<br>Shutter Height | QUANTITY |
|---|---|---|
| 2000 mm | 2600 mm | 1 |

| Sr. | TECHNICAL SPECIFICATION |
|---|---|
| 1 | 3 Phase Indirect drive motor with chain for manual operation |
| 2 | G.I. Slats: Thickness 1.2 mm Width 75 mm. Length Clear Opening + 200 mm |
| 3 | Guide : G.I. sheet 3.51 mm Size 75-100 mm x 30 mm |
| 4 | G.I.Top COVER: Thickness 0.9mm Length Clear Opening + 600 mm |
| 5 | Manual handle provision at 2 positions |
| 6 | MS Support bracket 5 mm Thickness - 02 Nos |
| 7 | Bottom Rail : Thickness 2 mm<br>Angle (25 x 25 x 5) welded at bottom. |

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD.
Email:- info@nihva.com
Website:- www.nihva.com

| | SIGN | DATE |
|---|---|---|
| DRAWN | S.J. | |
| CHECK | A.K. | |
| REV. | 00 | |
| APPRD. | | |
| MFG | | |
| Ref. No. | | |

CLIENT - TATA MOTORS

DRG -GA DRG OF MOTORISED ROLLING SHUTTER

SITE -

DWG. NO. -

SCALE: 01:01 | WT: | SHEET: 01 OF 01