



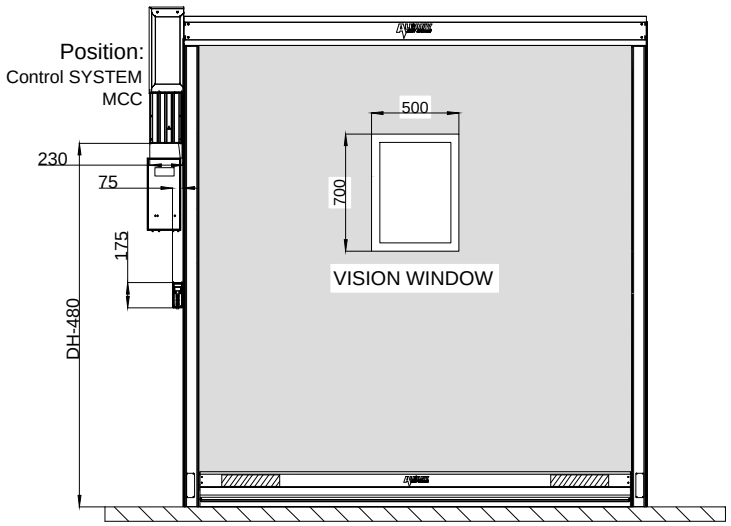


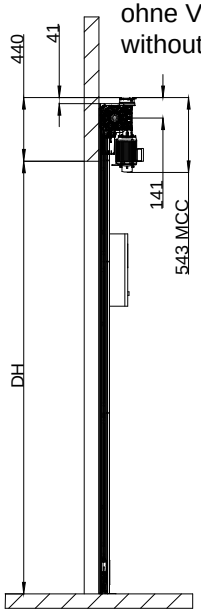


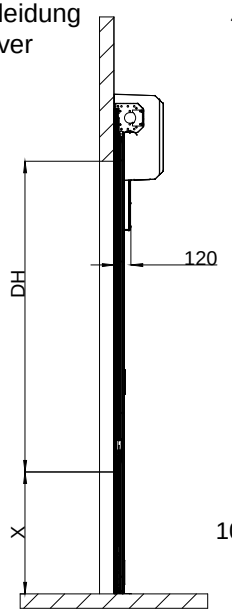

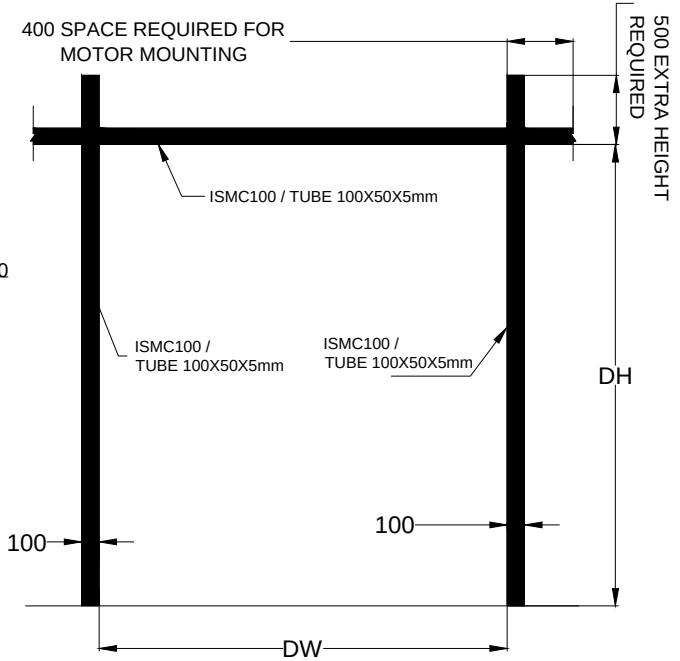

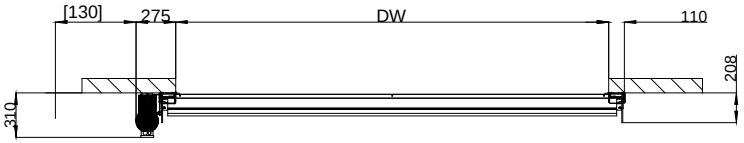

ohne Verkleidung
without cover

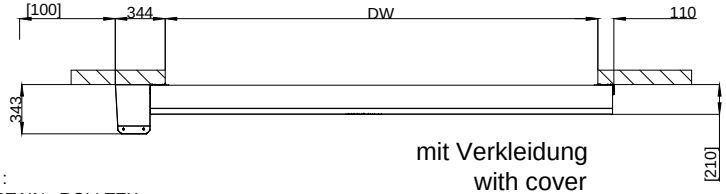

mit Verkleidung
with cover

NOTE :
1. CURTAIN : ROLLTEX.
2. COLOR : RAL 7001 (GRAY).
3. SAFETY EDGE AVAILABLE.
4. DOOR LINE (PRE RUNNING) PHOTOCELL AVAILABLE.
5. SUPPLY VOLTAGE REQUIRED : 415 VOLT, 3 PHASE (PAPL SCOPE).
6. CABLE REQUIRED : 4 CORE(PAPL SCOPE) FOR SUPPLY.
7. STD CABLE REQUIRED FOR MOTOR & PUSH BUTTON PENDENT FROM CONTROL BOX : NIHVA SCOPE.
8. STRUCTURE REQUIRED IS IN CLIENT SCOPE.
9. ETHERNET COMPATIBLE WITH ALLEN BRADLY PLC

SR. NO.	CLEAR WIDTH(DW)	CLEAR HEIGHT(DH)	QTY	MOTOR LOCATION
1.	1200mm	1800mm	01 NO	LEFT SIDE

Tolerance ±3 mm (for all dimensions)

Dimensions in [ ] ==> clearance for installation

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: HIGH SPEED DOOR RP300 & STRUCTURE

	NAME	SIGN	DATE
DRAWN	P.V.A		15.03.19
CHECK	V.M.T		15.03.19
APPV'ED			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT :- PAPL

PROJECT :-PAPL

LOCATION :- CHAKAN.

DWG. NO. :- NIHVA/18-19/0290 REV.:- R00

SCALE: NTS WT: SHEET: 01 OF 01