

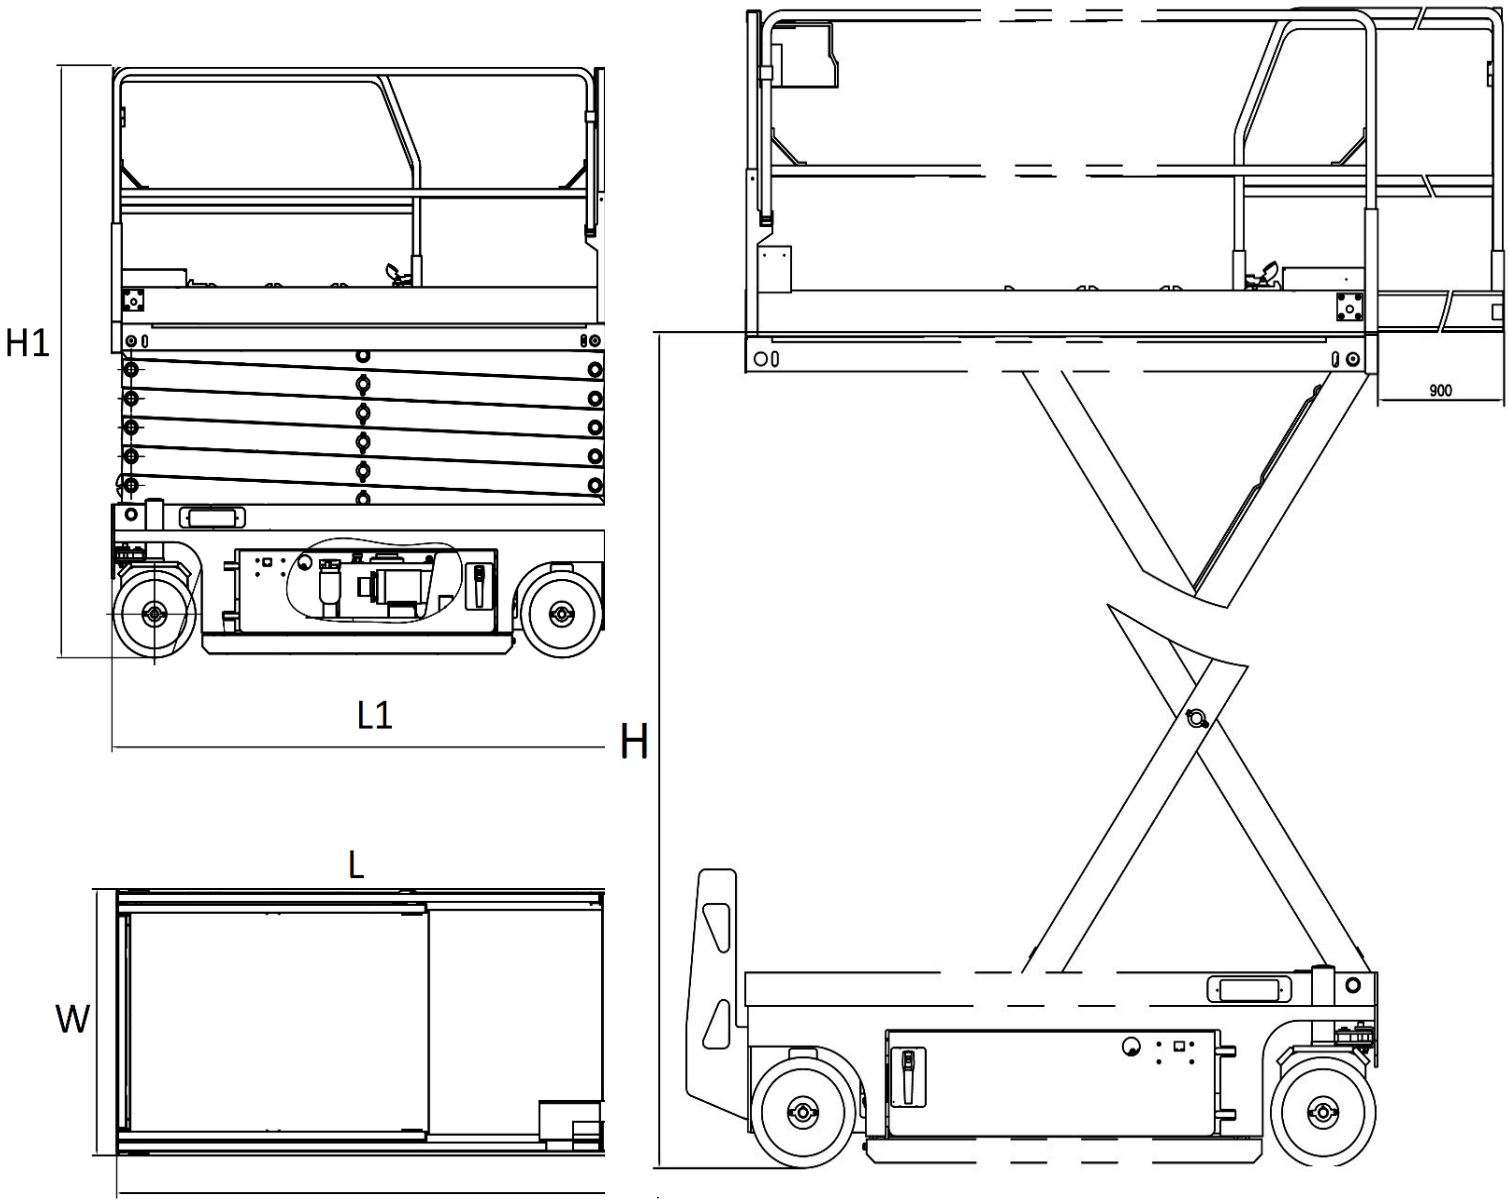
NIHVA

We Make Possible

NIHVA SELF PROPELLED SCISSOR LIFT

NIHVA self-propelled scissor lift are widely used to provide temporary access to high, inaccessible areas on a variety of job sites such as maintenance and construction work. Indoor use is preferred. Capable of being fully operated by single person. The scissor structure enables reliable stability when lifts rise, the broad platform and high loading capacity get the aerial working more efficient and safety.

Technical Drawing



Technical Specification

Model No.		ND-SL-SP-12
S.W.L.	kg	320
S.W.L. on Extension	kg	113
Max. Number of Workers		2
Working Height	mm	13800
Platform Height (H)	mm	11800
Overall Length (L1)	mm	2430
Overall Width (W)	mm	1150
Overall Height (Rails Up)	mm	2550
Overall Height (Rails Down) (H1)	mm	2003
Platform Size (L*W)	mm	2270*1120
Platform Extension Size	mm	900
Ground Clearance (Raised)	mm	19
Wheelbase	mm	1870
Turning Radius (Inside)	mm	2200
Lift/Drive Motor	V/kw	24/4.5
Travel Speed (Stowed)	km/h	3
Travel Speed (Raised)	km/h	1
Raise/Lower Time	sec	70/45
Power Source	V/Ah	4*6/260
Charger	V/A	24/30
Gradeability	%	25
Maximum Working Slope	°	1.5/3
Tyre Size	mm	Ø380*129
Weight	kg	2830



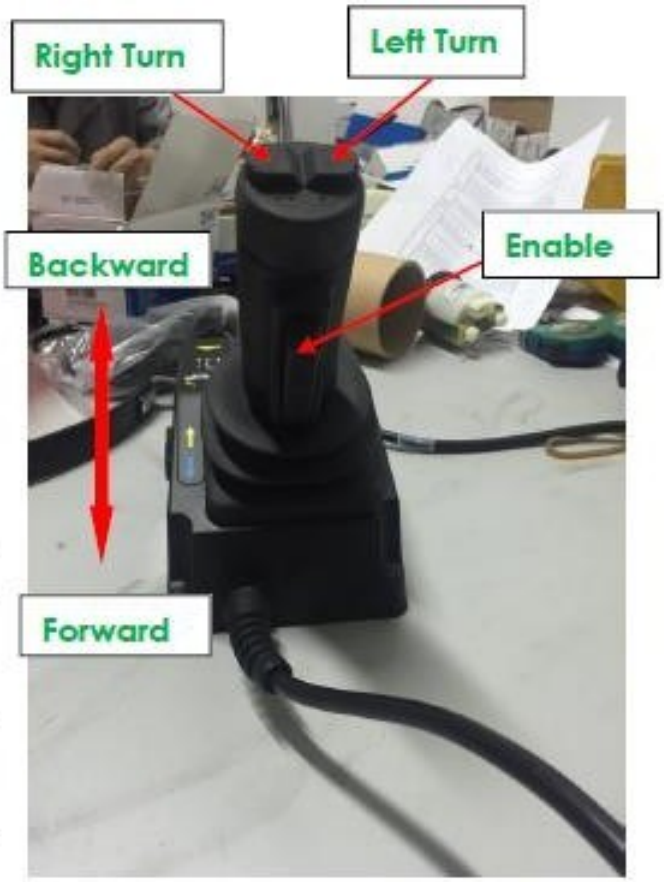
Self-propelled Scissor Lift Features List

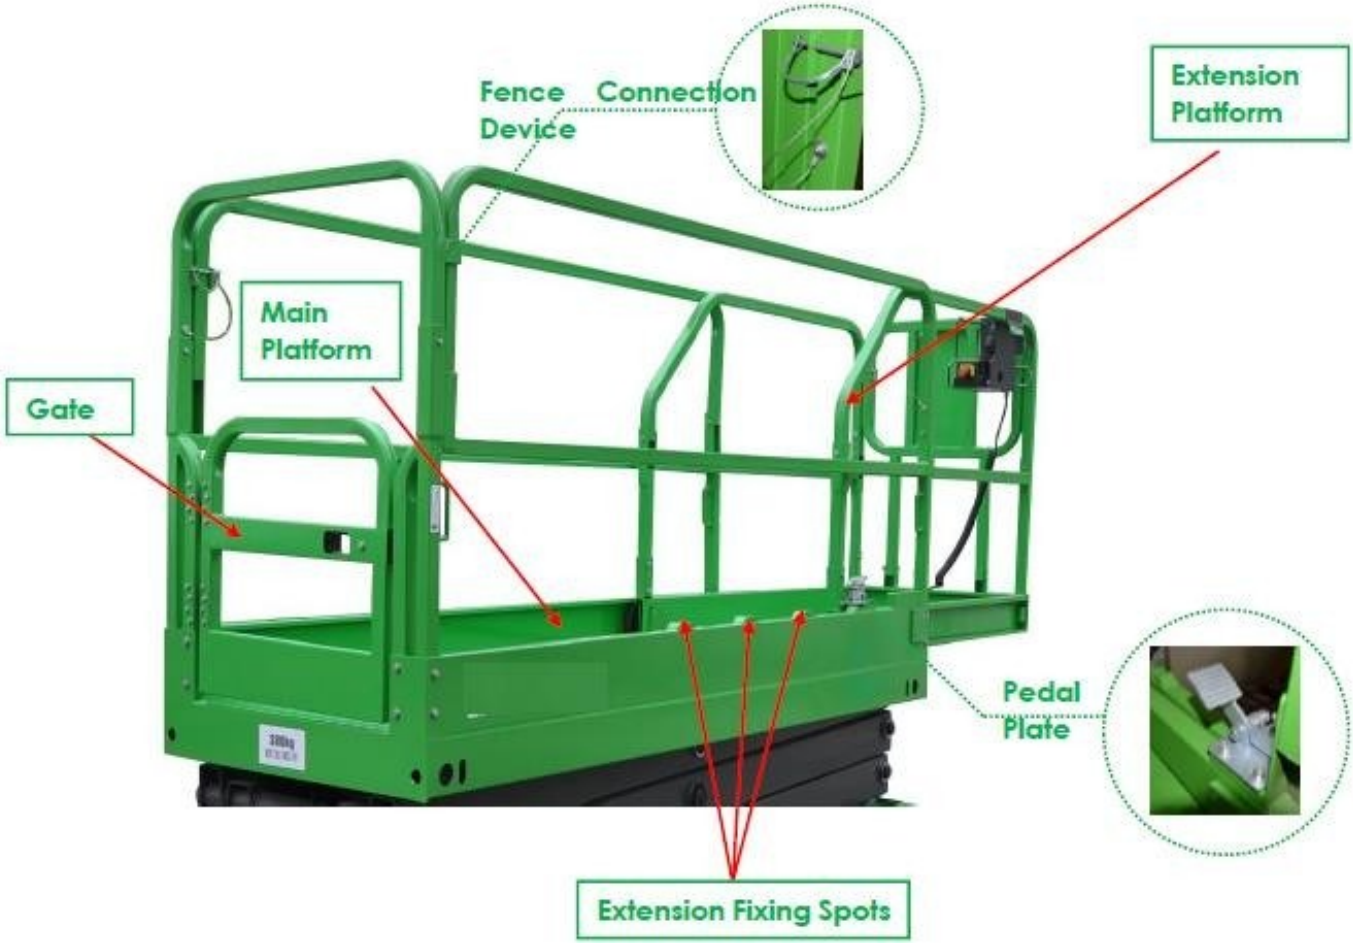
STANDARD FEATURES	
Proportional Control	Anti-burst valve
Inter-lock Door on the Platform	Lateral Forklift Pockets
Manual Extension Platform	Drivable at Full Height
Hydraulic Braking System	Over Charging Battery Protection
Hydraulic Motor Driving	Compact Turning Radius
Trace-less Tyres	Swing Out Tray
2 Wheel Driving	Anchorage (Hook), Lifting Hook
All Motion Alarm, Flashing Beacon	Tilting Level Sensor with Alarm
Emergency Stop Button	Toe Protection
Fault Diagnose System	Maintenance Free Battery – Trojan
Automatic Pothole Detection	Drive Speed Interlock Limit Speed While Elevated
Detachable/Foldable Fence	Safe Distance Protection During Lowering
25% Gradeability	Balance During Operation
Maintenance Support Bar	Manual Brake Release
Auxiliary Lowering	Battery Disconnect Switch
Hour Meter, Battery Charging Indicator	Powder Coated Painting, Toolbox

General Appearance




Display
Lift
Drive
Horn
Slow Speed
Emergency Stop


Right Turn
Left Turn
Backward
Enable
Forward


Fence Connection Device
Extension Platform
Main Platform
Gate
Pedal Plate
Extension Fixing Spots


Supported
Maintenance Supporting Bar
Stowed
Hydraulic Cylinder
Neatly Wiring


Hour Meter
Buzzer
ECU
Front Driving Wheel
Right Drawer
Ground Control Panel