NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA
Checkweigher




NIHVA

Point Smart Guide makes operation easy and avoids operator errors.

• **Easy-to-follow instructions make each operation simple**



• **Outputs e-Daily Report**

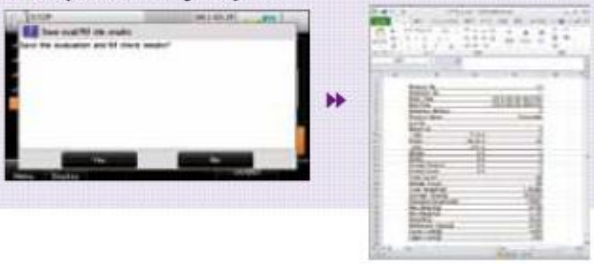

Output in CSV format.

Navigation and Supervision

For checkweighers to function properly, operation checking must be performed correctly at each stage of the daily operation: at start-up, during production, and at the end of production. These procedures, although necessary, are not always strictly followed due to the time and effort involved.

Smart Guide navigates operation check and maintenance procedures in an easy-to-understand format. Moreover, when a procedure was performed incorrectly, Smart Guide will not allow to proceed further, ensuring correct operation management.

E-Daily Report

All checkweigher weight data and operation check (audit) records are saved local on the SSV checkweigher, At the end of production, the data and operation check log can be sent via **E-Reports**. The elimination of manual data collection minimizes possible errors and makes data and log management simple and efficient.

Point

Product Registration Navigation simplifies parameter setting procedures with step-by-step illustrated instructions.



• **Product parameter setting**



• **Fine adjustment**



On-screen illustrations help you understand each key procedure and are listed in a "step-by-step" methodology. If performed improperly, the navigation stops for corrective action.



Operation Guidance

Operation Support

Easy to follow

Operator-oriented, easily navigated menu structure

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Technical information –


Working Principle :

Electromagnetic Balance (Force Balance)


A force is generated in an electromagnetic coil to balance the load caused by the product's weight. The current in the coil is measured and converted to the weight of the product.

- In the unloaded state, the balance rod is horizontal with the tip centralized at zero in the position sensor. When a product moves onto the weigh conveyor, the load is transferred through levers down onto one end of the rod forcing the other tip end to swing up. This upward movement of the tip is detected by the position sensor that activates the passage of current through the electromagnetic coil to force the rod tip back to the zero position. The amount of this balancing current is proportional to the weight of the product on the weigh conveyor and can be converted to the absolute weight.
- In addition to the basic characteristics of Electromagnetic Balances, Electromagnetic Balances have high response speed and good resistance to floor vibration.


Diagram of Basic Principle

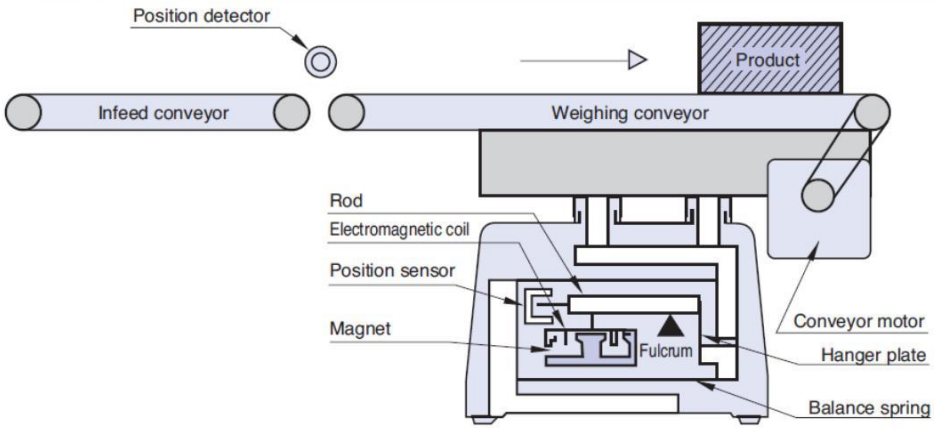

Safety and Reliability :
Anritsu Checkweigher complies with ISO & GMP to assure the safety & security of users as well as environment. All Checkweigher has received OIML-51 (International Recommendations for Legal Weighing Equipment) and European Type approval

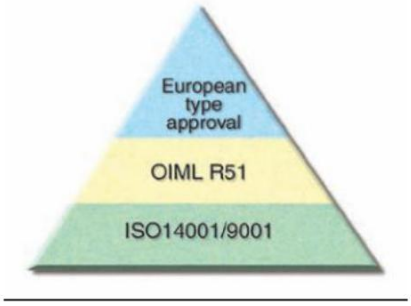

High Rigid Structure allowing stable & Precise weighing –
Our newly developed electromagnetic balance exclusive built-in DROP (Dynamic Responsiveness Optimization Process) filter have been combined to yield 1.5 time faster response time & 2 times higher accuracy.

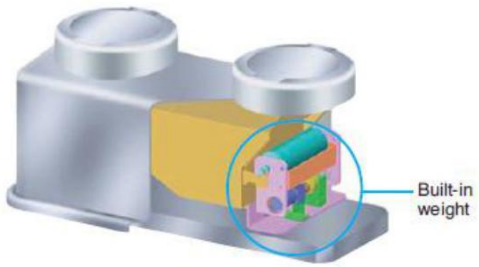

HACCP and GMP compliant structure prevents dust accumulation & improves cleaning efficiency –

1. Open frame for easy cleaning
2. Tool free removal & attachment
3. SUS304 frame for excellent sanitation compliance




The conveyor unit can be easily removed and attached from the motor, facilitating cleaning.

Control Panel – 8.5-inch color TFT LCD Touch screen display







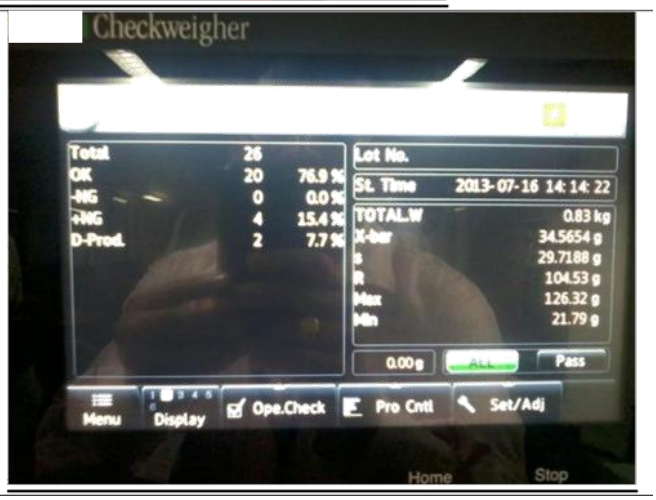

User Friendly controls –

8.5 inch color LCD touch screen interface – insures improved operability. Product registration can be set quickly and easily in two modes – Operator Mode & Manager Mode

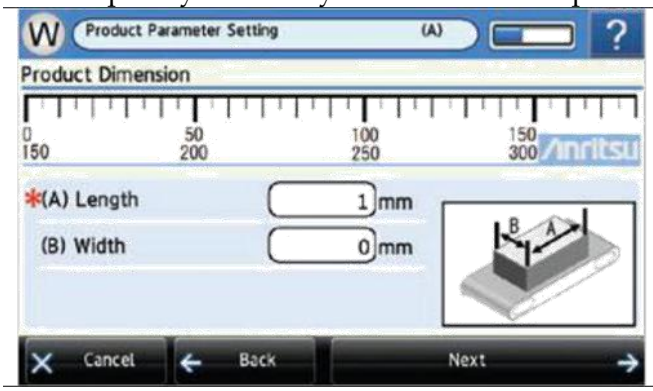

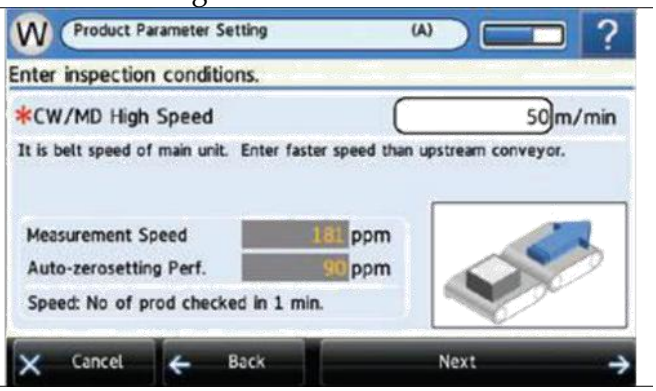

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

No.	Description of Goods			Qty.
1.	Checkweigher Model			01
	Weighing range	:	12 to 3000g	
	Scale interval	:	0.1g	
	Maximum Speed	:	220 products/min	
	Maximum accuracy	:	± 0.2 g (3 Sigma)	
	Display	:	8.5 inch color TFT LCD screen	
	Operation method	:	Touch Panel (start, stop and Home are direct push buttons)	
	Indication range	:	3009 g	
	Preset memory	:	Maximum 200	
	Classification	:	2 or 3	
	Product Size (mm) Width	:	20 to 250 mm	
	Length	:	60 to 450 mm	
	Height	:	5 to 450 mm	
	Belt Speed	:	15 to 120 m/min	
	Mass	:	67 kg	
	Power requirement	:	200 to 240 Vac +10% –15%, single phase, 50/60 Hz, 250 VA, rush current 20 A (typ.) (20 ms or less)	
	Environmental conditions	:	0° to 40° C (variation not to exceed 5°C/h to maintain accuracy), relative humidity 30% to 85%, non-condensing.	
	Protection Class	:	IP 30 compliance.	
	Exterior	:	Stainless steel (SUS304) (excluding some parts)	
	Data output	:	USB2.0, 10BASE-T/100BASE-TX Ethernet	
	Flipper Rejector Model			
	Gate drive system	:	Pneumatic drive	
	Classification	:	2 (Discharge to the right side of low direction)	
	Product size (mm)	:	250(W) x 300 (L) x 200 (H), 3 kg	
	Maximum Speed	:	140 products/min	
	Belt Speed	:	15 to 120 m/min	
	Air requirements	:	0.5 to 0.9 Mpa, 0.1 ℓ/min(A.N.R.)	
	Air supply inlet	:	Tube having outer dia of 6 mm	
	Power requirements	:	Supplied from checkweigher	
	Power Consumption	:	90 VA	
	Mass	:	34 kg	
	Environmental conditions	:	0° to 40°C, relative humidity 30% to 85%, non-condensing	
	Protection Class	:	IP 30 Compliance	
	Exterior	:	Stainless steel (SUS 304)	


Note :- Accuracy of Checkweigher depends on speed, weight, shape, type of product.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

SCHEMATIC DIAGRAM:

External Dimensions


KWS5411BF11
KWS5411BP11
KWS5412BF12
KWS5412BP12
KWS5414BF12
KWS5414BP12

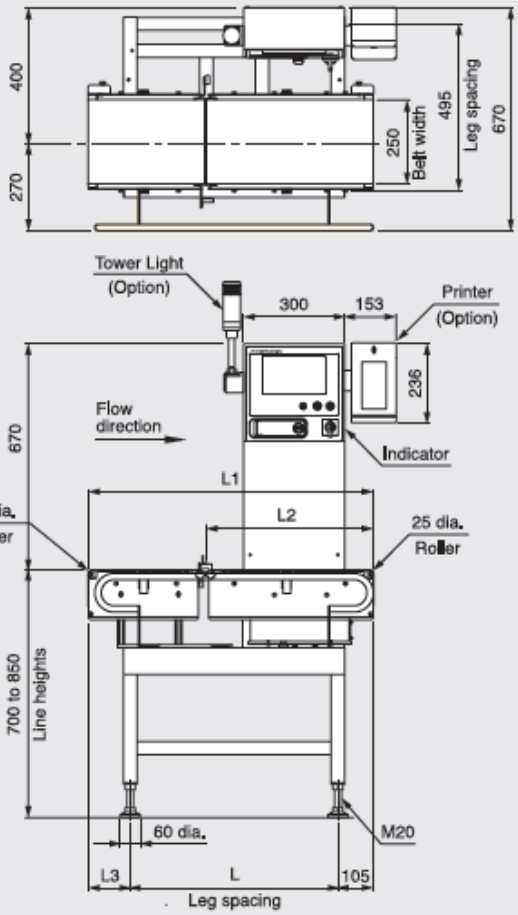

Model	L1	L2	L3	L
KWS5411	545	270	30	410
KWS5412	695	345	180	410
KWS5414	845	495	125	615

Units: mm

KW4233
type

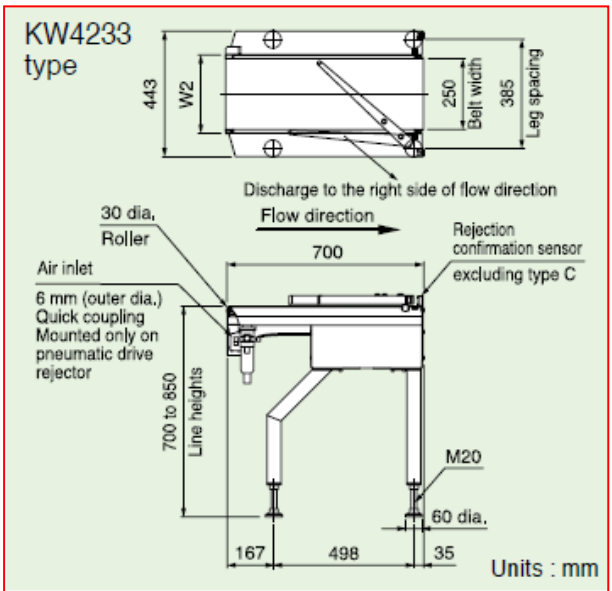

Units : mm

Maximum pass width	Model	W2 (mm)
	KW4233A◇B▼	280
	KW4233B◇B▼	265