

High Speed Roll Doors


Solutions from Albany for every need

ALBANY
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

Albany – the company behind the high speed roll door


For a company steeped in tradition to be able to meet today's requirements, it is important that the company constantly evolves and acts with the future in mind. When Albany invented the first high speed roll door in 1968, they paved the way for an entirely new standard. Today Albany manufactures high speed door systems that are sold all over the world, and the company has been proven by their customer-focused solutions. The driving force at Albany is to bring about change through new inventions that are given precedence now and in the future.

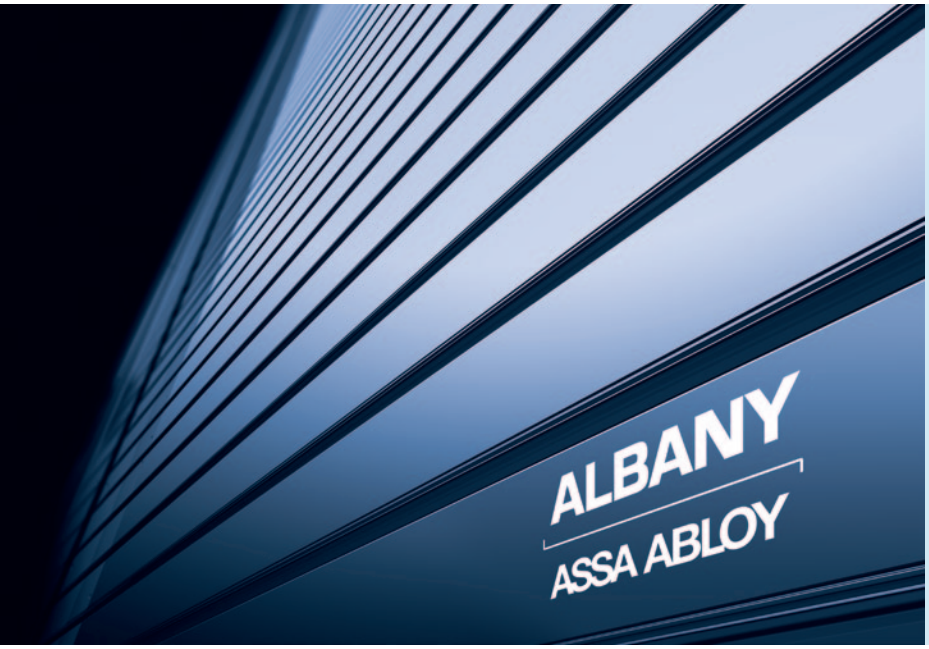



There are obvious benefits with high speed roll doors

High speed roll doors are a good investment for the future. The rapid opening and closing speeds, the long operating life and the high safety standards in Albany's products means that customers quickly receive return on their investments. The rapid door speeds enable more efficient flow of materials and save on energy costs compared to conventional doors. Additionally, high speed doors are typically larger, operate at higher cycles and incorporate advanced safety features. The doors are fitted with the latest control systems, are easy to use, reach a speed of many metres per second and can if needed be opened and closed more than 100 times an hour. Albany doors are appreciated by numerous companies and industries all over the world. They are used in a wide range of applications from logistics to heavy industry. Albany can provide specially designed solutions to the food and pharmaceutical industries where good hygiene is critical. Many companies also use Albany's machine protection doors in their machine and manufacturing processes to improve work flow and enhance safety.

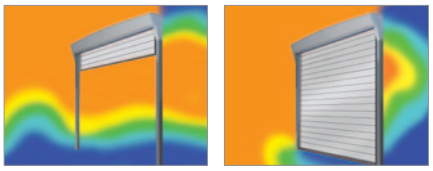

Conventional door



Albany high performance door

Thanks to fast opening and closing, the use of high-speed roll doors reduces energy costs, maintains a constant room climate and guarantees smooth material flows.

Our Service Offers

Your needs are our service demands!

Since 1968, Albany stands for service in the Door Industry. This can include the repair, modernisation, maintenance or inspection of fire protection or insulation: all doors are always in good hands with us. Our failure analysis and techniques for dealing with defects are based on years of experience and constant training of our employees.

Our skilled staff, combined with our high quality standards, makes Albany the ideal service company for your door systems.



Product Overview



High performance doors for interior applications
Partition rooms for temperature control, noise protection, air infiltration and energy loss prevention.



High performance doors for exterior applications
Minimize energy loss in high cycle applications.



Doors for use during processes
Door systems that protect people, product and processes operating in close proximity to assembly lines and machinery.

DOOR	min. width	max. width	min. height	max. height	Type	Wind class	Crash system	Counter balance	Side frame
RapidRoll® Clean	1000	3500	1000	3500					5
Rapid Food	1000	4000	1000	4000		1	•	•	5
RapidRoll® 300	1000	4000	1000	4200		1	•		6
RapidRoll® 300 I Stainless steel	1000	4000	1000	4200		1	•		6
RapidRoll® 300 Plus Aluminium	1000	4000	1000	4200	( )	1	•	•	6
RapidRoll® 300 Plus I Stainless steel	1000	4000	1000	4200	( )	1	•	•	6
RapidRoll® 355	1000	4000	1500	4200		2	•	•	6
RapidRoll® 392	2000	6000	2000	6000		2	•	•	7
RapidRoll® 450/600/600 G	2000	7500	2000	6000		2	•	•	7
RapidRoll® 600	1500	6000	2000	6000		1/3	•	•	7
RapidRoll® 3000	600	5000	2500	5000		3–4		•	8
RapidRoll® 3000 XXL	600	8000	2500	6000		2–4		•	8
RapidRoll® 3000 ISO	600	6000	2500	5000		3–4		•	8
RapidRoll® 3000 GL	600	5000	2500	5000		3–4		•	8
RapidRoll® 3000 R	600	6000	1500	3000		3–4		•	8
RapidProtect™ 100	500	3000	500	3000					5
RapidProtect™ 300 Machine protection	750	4000	750	3500		1			10
RapidProtect™ 2000 Machine protection	600	3500	1000	3000		3		•	10
RapidTech® 110 Sectional Door		8000		6000		2–4			11
RapidRoll® F Roller shutter door		12000		8000		2			11
RapidFalt® SF Steel folding door	1500	6000	1500	6000		3–4			11
RapidNorm®		5250		5250					11
RapidStore®		According to customer needs		6000					11

Special Application Doors

RapidRoll® Clean

The objective of a cleanroom door in a cleanroom area is to prevent unnecessary air infiltration and minimise the spread of airborne particles. RapidRoll® Clean is custom built for cleanroom applications found in pharmaceutical, electronics and semiconductor, research and aerospace industries. The door complies with international standards in line with DIN EN ISO 14644-1 and the Fraunhofer Institute has confirmed its suitability for use in cleanrooms. The door was certified in compliance tests for ISO Class 5 and GMP Class C. RapidRoll® Clean provides high air-tightness, which keeps the pressure drop at a minimum when the door is closed. The door is manufactured in stainless steel (V2A) with smooth surfaces that are easy to clean.



W max.: 3500 mm
H max.: 3500 mm

Fraunhofer IPA TESTED® DEVICE
Albany Door Systems
RapidRoll Cleanroom
Report No. AL 1003-514

RapidFood

RapidFood – the foodstuffs industry door
RapidFood is particularly suitable for use in the foodstuffs industry. Doors in these areas must be insensitive to cleaning agents, and be easy to clean and disinfect to maintain hygiene in production areas. RapidFood has been developed taking into account rules and regulations from the area of food processing machinery. The entire door is made from V2A stainless steel and has a smooth surface that is easy to clean. As an option a top roll cover is available. A gutter on the bottom profile prevents water from the curtain dripping into the door opening. A FDA-tested PVC curtain with white reinforcement stripes is available on request.



W max.: 4000 mm
H max.: 4000 mm


DGUV Test
DGUV Test-Prüfbescheinigung

RapidProtect™ 100

The RapidProtect™ 100 has been especially designed for interior use in the conveyor technique. The door meets all the requirements needed for a smooth and speedy material flow. It is solely intended for materials handling and passenger transportation is strictly prohibited.



W max.: 3000 mm
H max.: 3000 mm

Doors With Flexible Curtains

W max.: 4000 mm
H max.: 4200 mm



RapidRoll® 300

The door was specifically developed as an internal door, but is also used in wind-protected external areas. The design principle of the RapidRoll® 300 is based on a modular system. This means that the side frames can be either stainless steel or galvanised steel. Furthermore, there is a choice of curtains, ranging from PVC with coloured reinforcement strips, sturdy, high-tenacity RollTex® material, flame-retardant fabric or curtains either with vision panels or windows. There are alternative control systems for various speeds available.

W max.: 4000 mm
H max.: 4200 mm
4000 mm (F+R)



RapidRoll® 300 Plus

The RapidRoll® 300 Plus is a compact, light high-speed door made with aluminium or stainless steel columns for the most diverse applications. The RapidRoll® 300 Plus has a standard ounterbalance, which allows for manual self-opening of the door. Alternatively, an automatic self-opening system is available, whereby the door automatically opens in the event of a power failure. Due to its special additional features, the RapidRoll® 300 Plus F+R is specifically deployed for areas in which doors are used as escape routes and have to open automatically if there is an emergency or if there are technical faults or power failures.

W max.: 4000 mm
H max.: 4200 mm



RapidRoll® 355

Indicative of the RapidRoll® 355 is the combination of a high level of technology and modern industrial design. Good wind resistance through the curtain tensioning system and wind protection elements, a self-repairing breakaway capabilityafter a collision and a pre-running safety photocell for contactless protection of personnel and goods make the door an all-rounder for internal and external use. The door‘s side frames are made from anodised aluminium profile.

RapidRoll® 392

The RapidRoll® 392 provides a rugged industry standard and offers customers a favourable price/ performance ratio. The basic features of the door are intentionally limited to just the essentials. You can configure your RapidRoll® 392 according to its intended use. The side frames are made from galvanised steel profile. A curtain tension system is standard. The door can be fitted with an optional knock out mechanism. As afety features, the door has an electric safety contact strip and a stationary safety photocell.



W max.: 6000 mm
H max.: 6000 mm

RapidRoll® 450/600/600 G

The RapidRoll® 450/600/600 G is an all-rounder and perfect for numerous industrial and logistical requirements. As an exterior door, it closes reliably and prevents drafts and cold. As an interior door, it separates bays, provides protection against noise and foreign particles. The door's side frames are made from aluminium. The standard curtain tension system ensures a firm smooth cutrain. The pre-running safety photocell is standard. Optionally, there is a self-repairing breakaway capability.



W max.: 7500 mm
H max.: 6000 mm

RapidRoll® 600

The RapidRoll® 600 is ideally suited for heavily-used openings and adverse conditions in both external and internal areas. The door is weather-proof and is resistant to extreme loads. It is resistant to wind loads in accordance to EN 12424, class 3, which corresponds to hurricane-strength wind speeds. The door's side frames and the roll cover are made from anodised aluminium. Upon request, a self-repairing knock out mechanism is available. The door curtain is made either from PVC or from RollTex® fabric.



W max.: 6000 mm
H max.: 6000 mm

Doors With Rigid Curtains

B max.: 8000 mm
H max.: 6000 mm







RapidRoll® 3000 series

The RapidRoll® 3000 series unites the highest level of function and design. Depending on the equirements and specific intended use, the 3000, 3000 GL, 3000 R, 3000 XXL und 3000 ISO models provide 5 variants for various uses.

All versions can easily cope with class 3 – 4, EN 12424 wind loads (hurricane strength). The technical heart of the 3000 series is the innovative DiscDrive technology. With this technology, the aluminium slats are rolled up contactless on winding discs and without using wear-susceptible guide rolls on the slats. The slats themselves are connected to each other hinge-free using laterally-positioned flexible highperformance ties. This means – no wear, low-maintenance and minimisation of secondary damage following a crash due to the swift replacement of the individual slats. The basic configuration comprises a contactless pre-running safety photocell and a stationary photocell on the main bottom edge. Coloured design variants for the aluminium slats in numerous RAL colours ensure the solutions are attractive.

Depending on the model, the RapidRoll® 3000 type curtain is made from anodised, double-walled aluminium slats, optionally with window slats. Perforated sheet slats are a further option. The RapidRoll® 3000 ISO type is equipped with a thermally separated curtain. The double-walled anodised aluminium slats enclose an additional hard-PVC insulation chamber, which functions as a permanent heat/cold barrier. The k value (heat transfer coefficient) for the curtain achieved with this is 1.4 W/m²K and 1.95 W/m²K for a complete door (example: 5 x 5 m). For translucency the RapidRoll 3000 GL curtain is made from crystal clear composite window slats framed in anodized aluminium profiles. The window allows over 70 % light to shine through. The RapidRoll® 3000 XXL type is suitable for door openings of up to 36 square meters, whereas the RapidRoll® 3000 R was developed for tight spaces.





The basic model – RapidRoll® 3000



The space-saver – RapidRoll® 3000 R



The basic model – RapidRoll® 3000 without windows



The big one – RapidRoll® 3000 XXL



The transparent one – RapidRoll® 3000 GL



The energy-efficient one – RapidRoll® 3000 ISO

Doors For Processapplications

W max.: 4000 mm
H max.: 3500 mm



RapidProtect™ 300

Machine protection doors protect people and processes in highly-automated commercial areas and make automation safer. The RapidProtect™ 300 is a machine protection door with narrow side frames made from aluminium. Depending on the intended use, there are various flexible curtain designs and colours available. The plastic glide elements hold the curtain firmly in the guide rails even if pressure is exerted by a person or item. It allows short cycle times and can be installed in machines, on production lines and railing systems within close proximity to the machine.

W max.: 3500 mm
H max.: 3000 mm



RapidProtect™ 2000

If complete protection even against pressing in of the curtain is required, then the RapidProtect™ 2000, with its sturdy rigid curtain made from aluminium slats, is the perfect solution. The side frames are self-supporting and are made from galvanised sheet steel profile. The design is available in accordance with various factory standards. The door has short opening and closing cycle times. As option a curtain for laser protection is available.

W max.: 5000 mm
H max.: 5000 mm



RapidRoll® 3000

The RapidRoll® 3000 from the 3000 series has been specifically designed as a machine protection door for laser systems and automatic welding systems with substantial flying sparks. The curtain comprises double-walled slats, which overlap the transitions like a labyrinth to ensure that the laser does not penetrate. The door has been tested in accordance with
DIN EN 60825-5. The design is available in accordance with various factory standards.

Alternative Solutions

RapidTech® 110

The sectional door RapidTech® 110 is particularly suitable for external use. The function and the design can be optimally adapted to the installation situation by customising the colour and using numerous panel and window variants. Pass doors and other options can be easily integrated. In addition to the manual version, electric drives are available. You can choose between the aluminium sectional door with maximum light translucency and visibility or the insulating sectional door with heat-insulating and sound-insulating properties.



W max.: 8000 mm
H max.: 6000 mm


RapidRoll® F

The RapidRoll® F metal roller shutter door is ideal for tall and wide external exits in industrial and warehouse buildings and is frequently used in conjunction with a high-speed roll door. The door is available in manual and electric motor versions.

RapidFalt® SF

The sturdy steel RapidFalt® SF folding door is used for frequently used external exits. By positioning the folding doors before or after the opening, the entire opening width and height are retained.



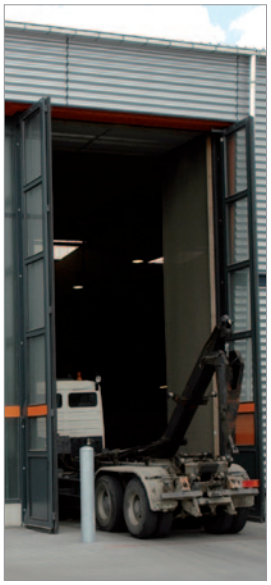

RapidRoll® F
W max.: 12000 mm
H max.: 8000 mm


RapidFalt® SF
W max.: 6000 mm
H max.: 6000 mm


RapidNorm®

Swing doors offer a high return for minimal procurement costs. The doors are used internally for personnel or forklift traffic. There is a medium-heavy version available for normal demands and a heavy industrial version for high demands.

RapidStore®

Strip curtains can be used for closing large openings. Vital for the effectiveness of a strip curtain is the strip thickness and the overlap.

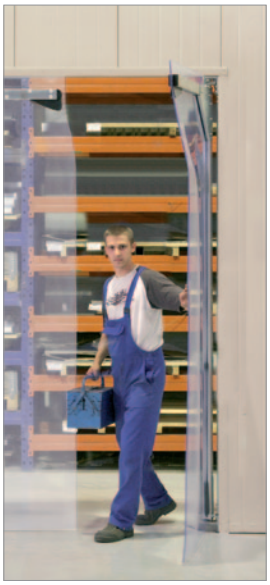

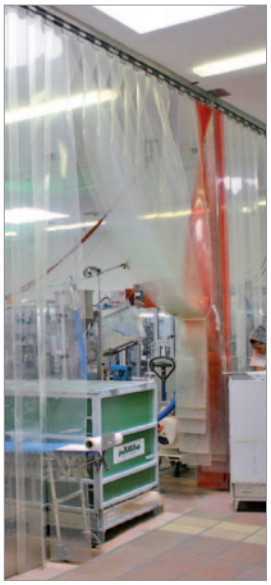

RapidNorm®
W max.: 5250 mm
H max.: 5250 mm

RapidStore®
W max.: depends on the customer's requirements
H max.: 6000 mm

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With a worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

www.albanydoors.com

ASSA ABLOY Entrance Systems
Albany Door Systems

www.albanydoors.com

QR-Code
Get further informations by scanning the QR-code with your smartphone and a appropriate appication.

Copyright by Albany
Technical data subject to change without notice
64 100 046/12/06 EN