
Installation Instruction
Strip curtains
RapidStore SE (swivable)

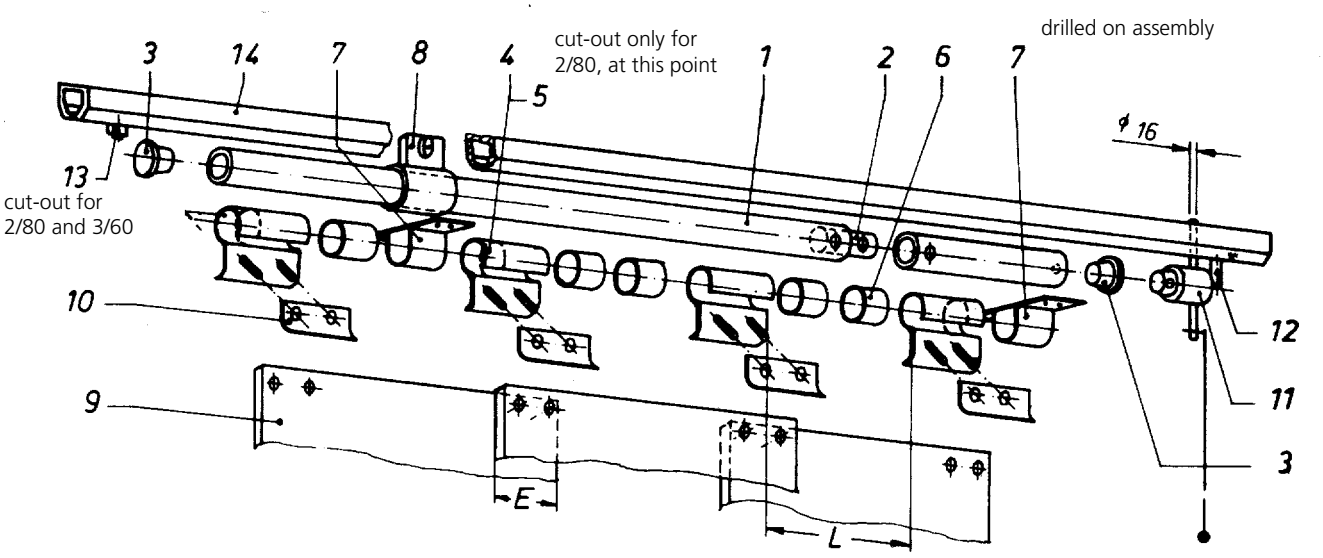

- In the case of 3/80, 4/60, 4/80 and 4/100 straight fixing sleeves only (4).
- Cut-out fixing sleeves for 2/80, on the outside and in connection area of tube clamp (or rolling device), and for 3/60 only on outside.
- Items 8, 11, 12, 13 and 14 applicable only to slideable model, where tube clamps (7) and 1 end stopper (3) are not required.

1. Installation

1.1 Connect support tubes (1) to connection piece (2) by pinning (only required for curtains widths of more than 6 m).

1.2 Plug one tube end with end stopper (3). Slide fixing sleeves (4) or (5) respectively , synthetic tubes (6) and tube clamps (7) or rolling devices (8) (in the case of slideable model) onto support tube (1) in accordance with sketch and arrange in such a way as to maintain distrances „C", „D" and „L" stated on working plan.


1.3 Plug tube end with stopper (3) and fix pre-assembled support tube to lintel.

1.4 Now fit the individual stripes (9) on to threaded bolts of fixing sleeves (4) and screw to counter-latch (10), washer and nut. Maintain overlap width „E" (see Table on reverse). The end stripe has to be screwd on in such a way as to be flush with the opening area. Additional fixing holes may have to be drilled into the end stripe. At the ends, the stripes may overlap threefold.

1.5 In the slideable model attention has to paid to the fixing device (11) mounted to the support tube (1) being outside the opening, such that on moving the strip curtain it cannot obstruct the passage area. To restrict sliding distance, end stop (12) is to be fixed to the side of fixing device (11) and end stop (13) to the other side in the desired position. Drill stop hole Dia 16 (min Ř) for locking bolt of fixing device (11) in runner (14).

1.6 Check length of strip on floor and trim as required. This trim may have to be repeated by the user as required at a later stage.

Types of fixing

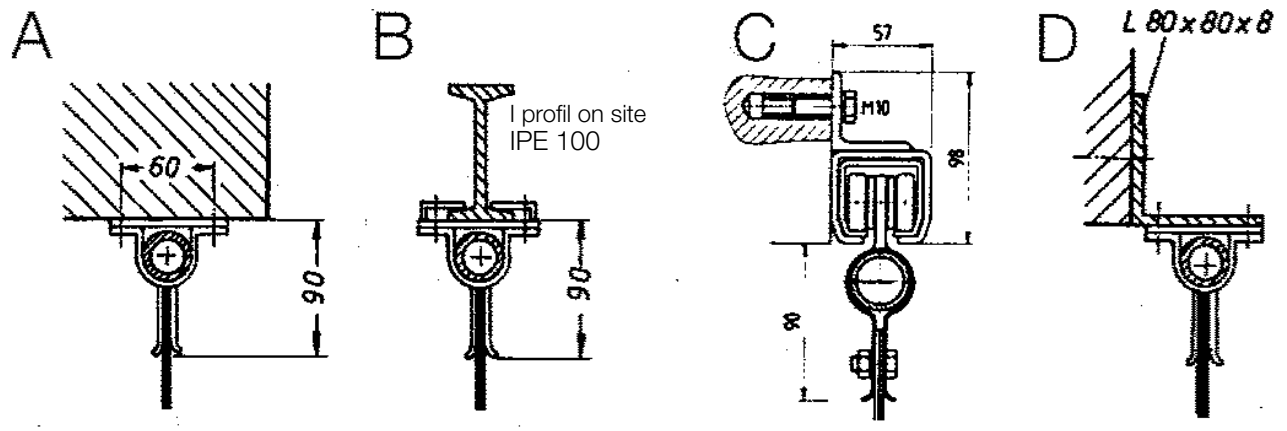

Model	Width	Thickness	Overlap "E"	
2/ 80	200 mm	2 mm	80 mm	80 %
3/ 60	300 mm	3 mm	90 mm	60 %
3/ 80	300 mm	3 mm	120 mm	80 %
3/100	300 mm	3 mm	150 mm	100 %
4/ 60	400 mm	4 mm	120 mm	60 %
4/ 80	400 mm	4 mm	160 mm	80 %
4/100	400 mm	4 mm	200 mm	100 %
5/ 60	400 mm	5 mm	120 mm	60 %
5/ 80	400 mm	5 mm	160 mm	80 %
5/100	400 mm	5 mm	200 mm	100 %

Model	Internal	External	
2/ 80	1500 mm	1500 mm	Desingnatin of strip curtain models suitable for constructin height up to:
3/ 60	2300 mm	2000 mm	
3/ 80	3000 mm	2300 mm	
3/100	3500 mm	3000 mm	
4/ 60	4500 mm	3200 mm	
4/ 80	5000 mm	4000 mm	
4/100	6000 mm	5000 mm	
5/ 60	6500 mm	5500 mm	
5/ 80	6900 mm	6000 mm	
5/100	7200 mm	6500 mm	


Partial overlap




Full overlap



Strip curtain Slideable

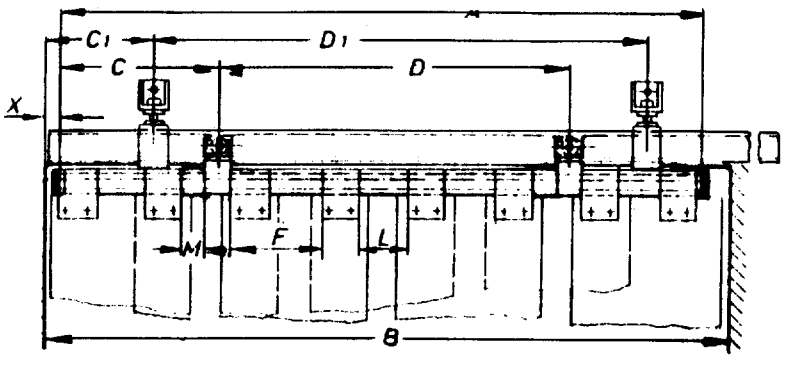

Strip curtain Swivable

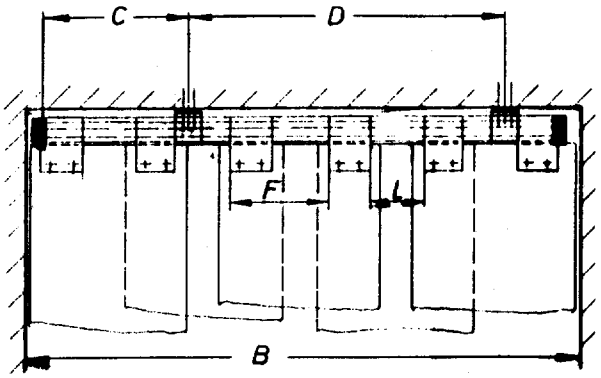

05.03.07 K Technical data subject to change without notice • Copyright by ALBANY DOOR SYSTEMS