

HYD CYL - Ø50 (Bore) X 35(Rod)X 426 (Stroke length) (Single Acting)

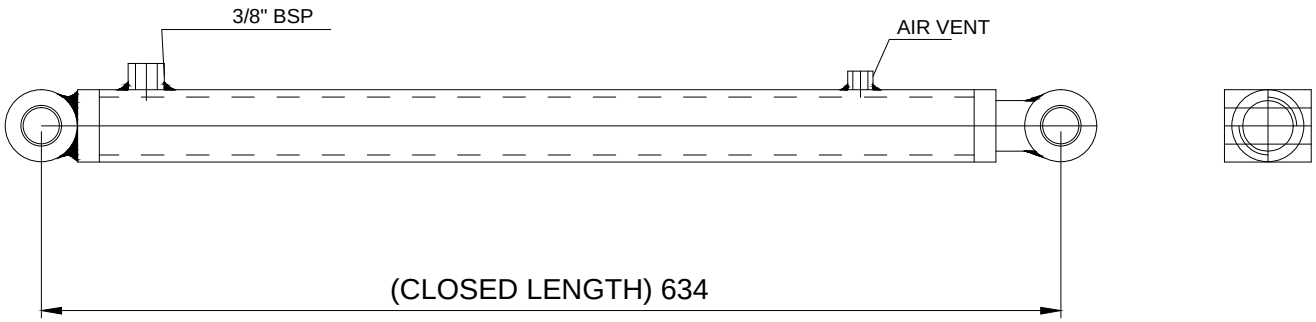

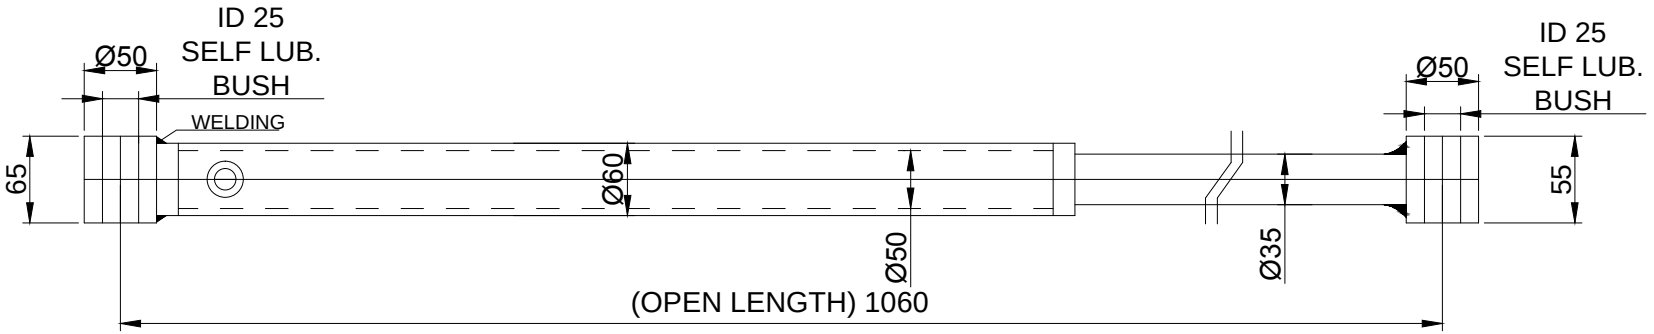

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 426 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 2 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE				
DECK CYLINDER				NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE	
DRAWN	P.A		20.08.2020	CLIENT -
CHECK	G.J		20.08.2020	PROJECT - NDL_630_631
APPRD.				SITE LOCATION -
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/20-21/VDR/0055 REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com