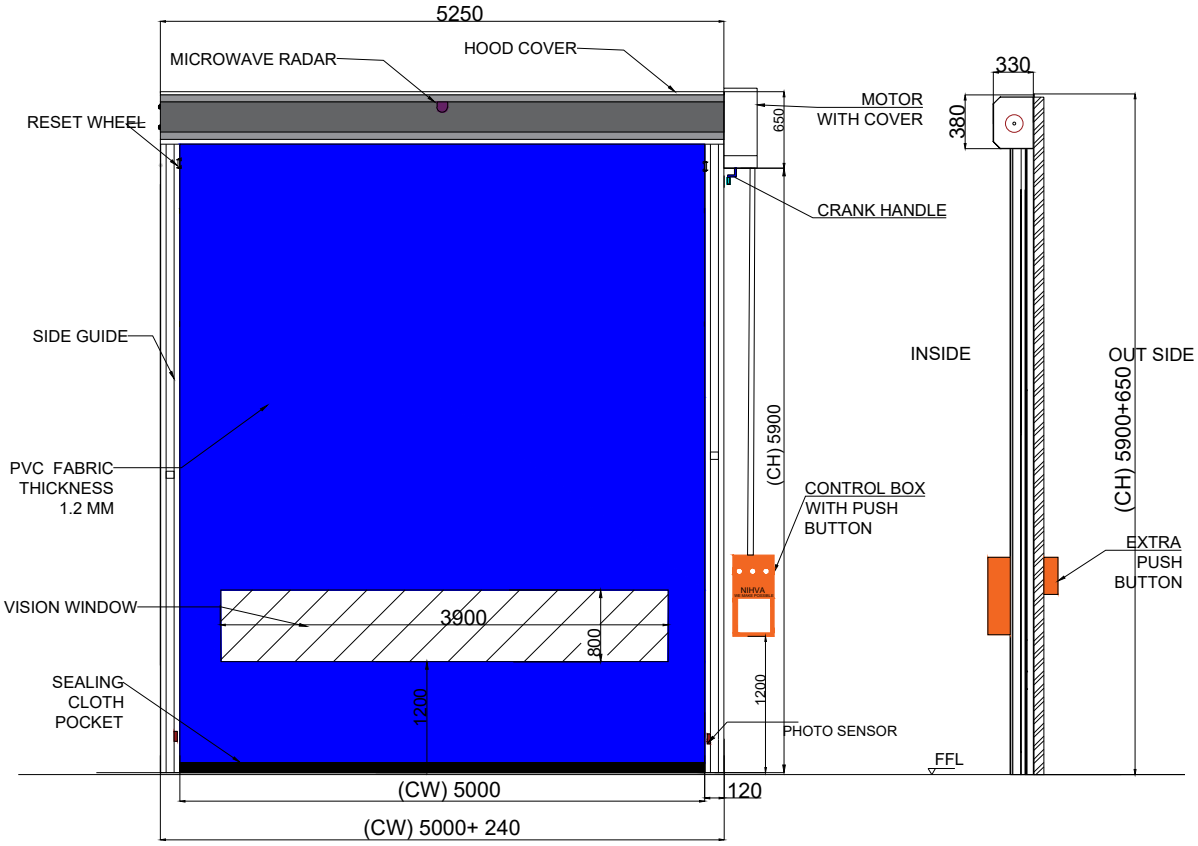


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	GUIDE	SELF REPAIR GUIDE WITH RESET WHEEL
3	CURTAIN PANEL	PVC FABRIC THICKNESS 1.2 MM.
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 0.6M/SEC & CLOSING: 2.0 M/SEC
6	RAL CODE	5002
7	ACCESSORIES	1) CONTROL PANEL WITH PUSH BUTTON-1NOS 2) PHOTOCELL - 2 PAIR 3) SAFETY EDGE SENSOR FOR BOTTOM 4) MICROWAVE RADAR ON BOTH SIDES 5) EXTRA PUSH BUTTON 1NOS

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**5000**	**5900**	01

REV - 01

CH & CW CHANGE AFTER SITE VISIT

NOTE : All DIMENSIONS ARE IN MM.

SPECIAL INSTRUCTION'S :

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR AUTOMATION				NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com	
DWG NO - NTPL-315-PM-01					
	NAME	SIGNATURE	DATE	PRODUCT - SELF REPAIRABLE HIGH SPEED DOOR	
DRAWN	J.P.		17-01-2025	PROJECT NO - NTPL- 315	REVISION - 01
CHK'D	B.S.		17-01-2025	SITE LOCATION - THANE	WEIGHT - 390 KG
APPV'D	V.T.		17-01-2025	MATERIAL -	QTY - 1
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'		A2			SHEET 1 OF 1