Dock leveller

Crawford DL6010SM

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

Economical manually operated dock leveller

The Crawford DL6010SM Minidock is a manually operated dock leveller, specifically developed for operators of fleets of standardized vehicles with the same bed height.

The Crawford DL6010SM Minidock is developed to be an easy to operate and economical solution in environments where standardized vehicles with the same bed height is used.

The Crawford DL6010SM Minidock is equipped with a gas spring, making it easy for one person to operate – just lift and swing the platform. The Crawford DL6010SM Minidock also meets the demands of most loading operations and fulfils all ergonomic requirements.

Adapts to movements of vehicle bed
The Crawford DL6010SM Minidock design includes a limited, free-floating function, allowing the platform to adapt to the vertical movements of a vehicle bed during loading and unloading.

Lip provides a smooth passage
The lip of the Minidock is made of steel. The shape of the lip is extremely flat and the design of the rear connection to the dock edge is bump-free, resulting in a smooth passage between building and truck bed.

Complete docking solution by Crawford
The Crawford DL6010SM Minidock can be complemented with a dock shelter to get the advantages of a complete docking system. Such solution improves the loading/unloading process and hence the working environment.

Technical Data

Handling rod for manual operation supported by a gas spring device	
Nominal length	700 mm
Nominal width	1250, 2000, 2200 mm
Load capacity	40 kN (4 tonnes) 60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 100 mm down to 100 mm
Platform tear-plate thickness	4/6 mm
Lip material	steel
Installation model	ramp, pit
Rubber buffers	RB 250x250x90 RB 500x250x90
European standard	EN 1398 Dock levellers

Dimensions

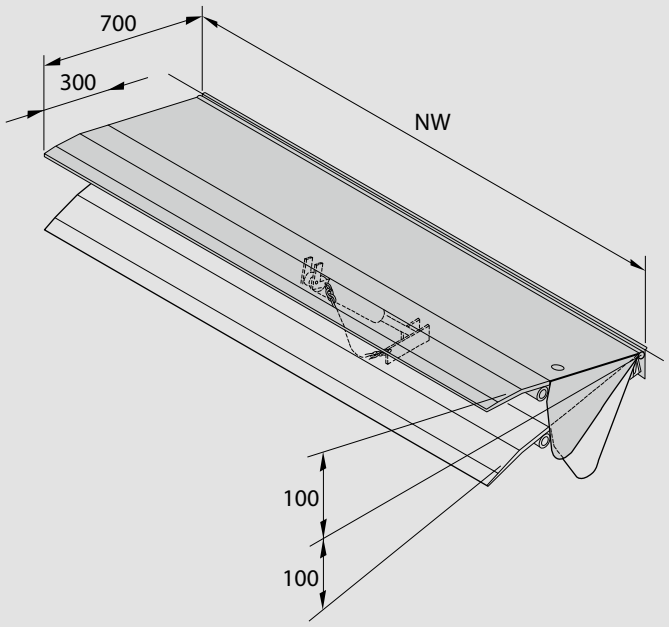

Nominal width (NW)	1250 mm (40 kN) 2000 mm (40 kN, 60 kN) 2200 mm (40 kN, 60 kN)
Nominal length	700 mm
Length of swing lip	300 mm
Vertical working range	100 mm

Installation modes / buffer options

Ramp installation

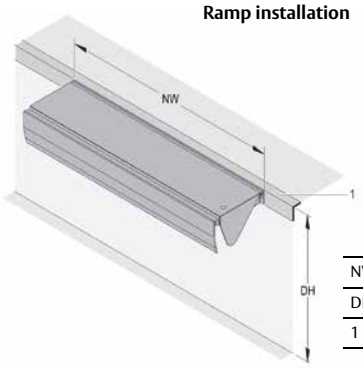

NW	Nominal width
DH	Dock height
1	Angle (by others)

Pit drawing 5143.0206	without tail lift recess
Pit drawing 5143.0243	with tail lift recess



H x W x D = 500 x 265 x 555

1 steel support construction
2 buffer 250 x 250 x 90



H x W x D = 500 x 265 x 555

1 steel support construction
2 buffer 500 x 250 x 90

Pit installation

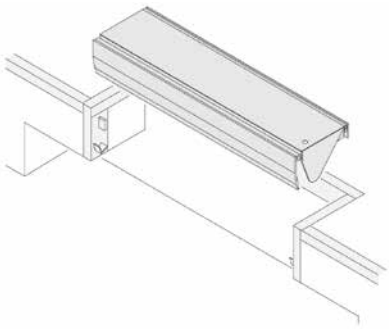



H x W x D = 250 x 250 x 90

1 buffer 250 x 250 x 90



H x W x D = 500 x 250 x 90

1 buffer 500 x 250 x 90

Standard available colours

- Red RAL 3002
- Green RAL 6005
- Hot dip galvanised
- Blue RAL 5010
- Jet Black RAL 9005

ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Q2.0-2014 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.