


QUANTITY- 24 NOS

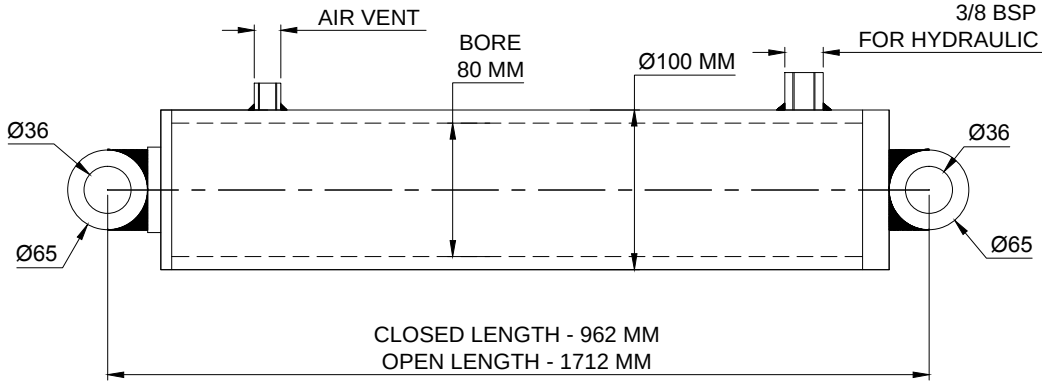

SPECIFICATION :-

- BORE :- Ø100 mm
- STROKE :- 750 mm
- PISTON ROD :-Ø50 mm
- MOUNTING :- WELDED TYPE BOTH END
- MEDIUM :- HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :- 3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 80'C (DEPENDING ON SEAL)

STROKE TOLERANCE :-0 TO +0.5mm

NOTE :
CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE				
LIFT CYLINDER				NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE	
DRAWN	P.A		02.05.2019	CLIENT -
CHECK	V.T		02.05.2019	PROJECT -
APPRD.				SITE LOCATION -
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/19-20/VDR/004 REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com