

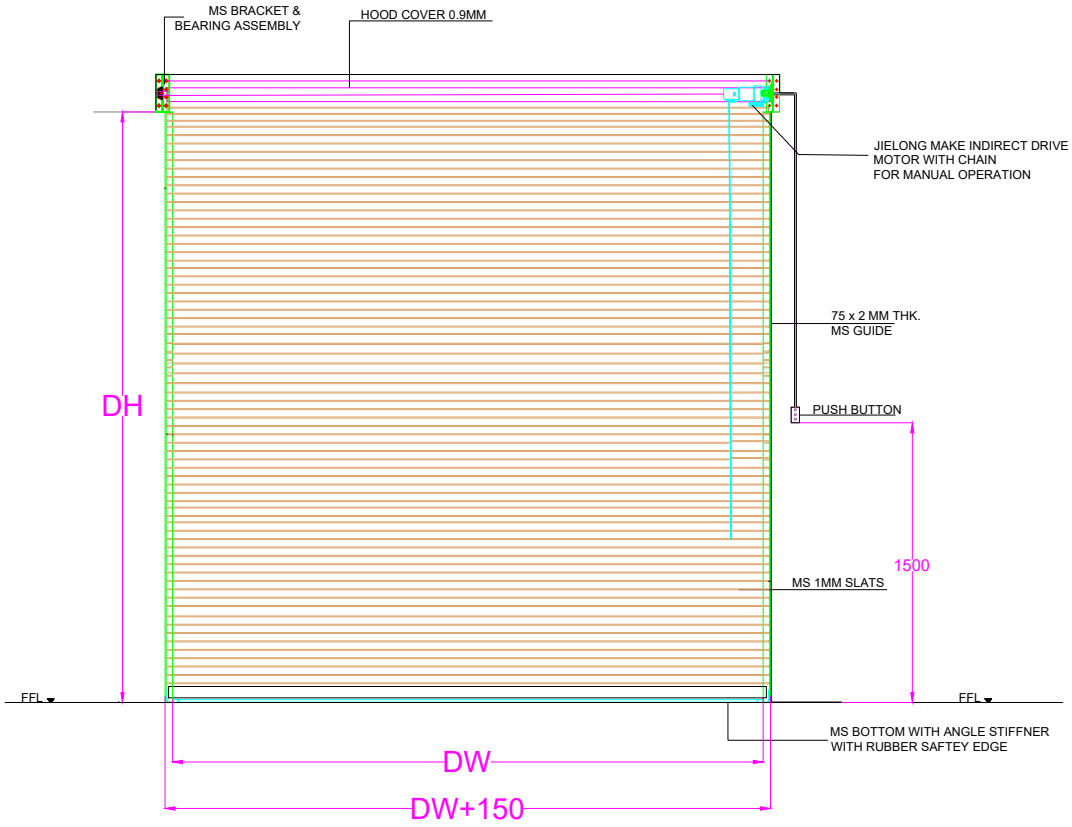


ELEVATION





PLAN

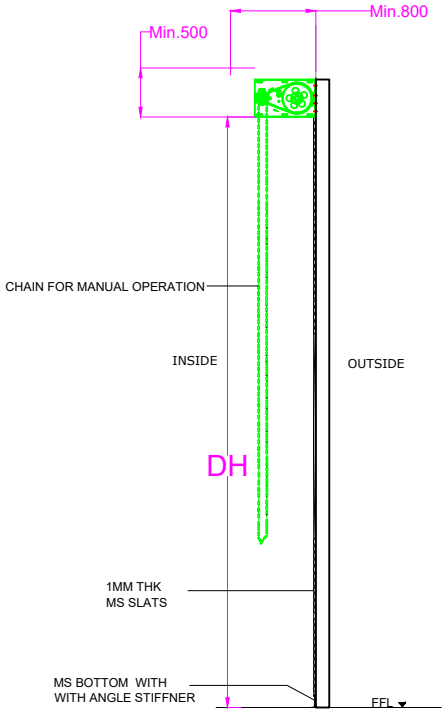

SIDE VIEW

Curve Type MS Shutter SLATS



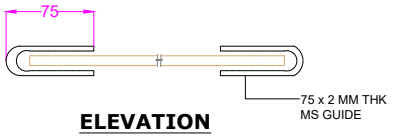

ELEVATION

TECHNICAL SPECIFICATIONS		
SHUTTER SIZE - DW 2500 x DH 3000MM - 1 NO		
SR NO	DESCRIPTION	SPECIFICATION
1.	SOLID SLAT	1 mm THK MS SLAT
2.	M.S.GUIDE TYPE & SIZE	U GUIDE OF 75X2MM THK
3.	MOTOR & HOOD COVER 0.9 mm	1/SHUTTER + 1/SHUTTER
4.	BOTTOM	STURDY ALLUMINIUM BOTTOM PROFILE WITH ANGLE STIFFNER WITH RUBBER SAFTEY EDGE
5.	WIND LOCK	NOT CONSIDERED
6.	SAFETY BREAK	NOT CONSIDERED
7.	CABLE WITH CONDUIT	CONSIDERED
8.	CHAIN	UP TO MAN HEIGHT
9.	MOTOR LOCATION	RH SIDE
10.	SHUTTER MTG LOCATION	INSIDE
11.	SHUTTER MOUNTING BASE	M.S. STRUCTURE (IN CLIENT SCOPE)
12.	APPROVED RAL SHADE	AS CLIENT APPROVED RAL 1015 (IVORY)

NOTE:-

1.ALL DIMENSION ARE IN MM.
2. SURFACE FINISH: POWDER COATING OF APPROVED RAL 1015 (IVORY)
3. MOUNTING: ON MS STRUCTURE WILL BE CLIENT SCOPE
4. THERE WILL BE JOINT IN MS GUIDE 75X2MM
5. JIELONG MAKE MOTOR - CAPACITY 400 KG
6. 400 KG MOTOR SPEED 4.8 RPM

DW	DH	QTY
2500MM	3000MM	1NO

Rev.No	Revision	Date	Revised By
1	Required Motor capacity and RPM added in note	29.06.2023	Nirmala

This drawing & designing is the property of NIHVA TECHNOLOMSES. Not be sold or copy to any other concern.

NIHVA TECHNOLOGIES PVT. LTD.

MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)

	NAME	DATE
DRAWN	SUJATA	21/06/2023
CHECK	A.K.	21/06/2023
APPRD	V.T.	21/06/2023

CLIENT - RBCC

PROJECT - ROLLING SHUTTER

SITE - PUNE

DWG. NO. -NIHVA/CLT/23-24/036 | REV.01

SCALE: 01 | WT: | SHEET: 01 OF 01

If any queries contact : design1@nihva.com