


DRAWING

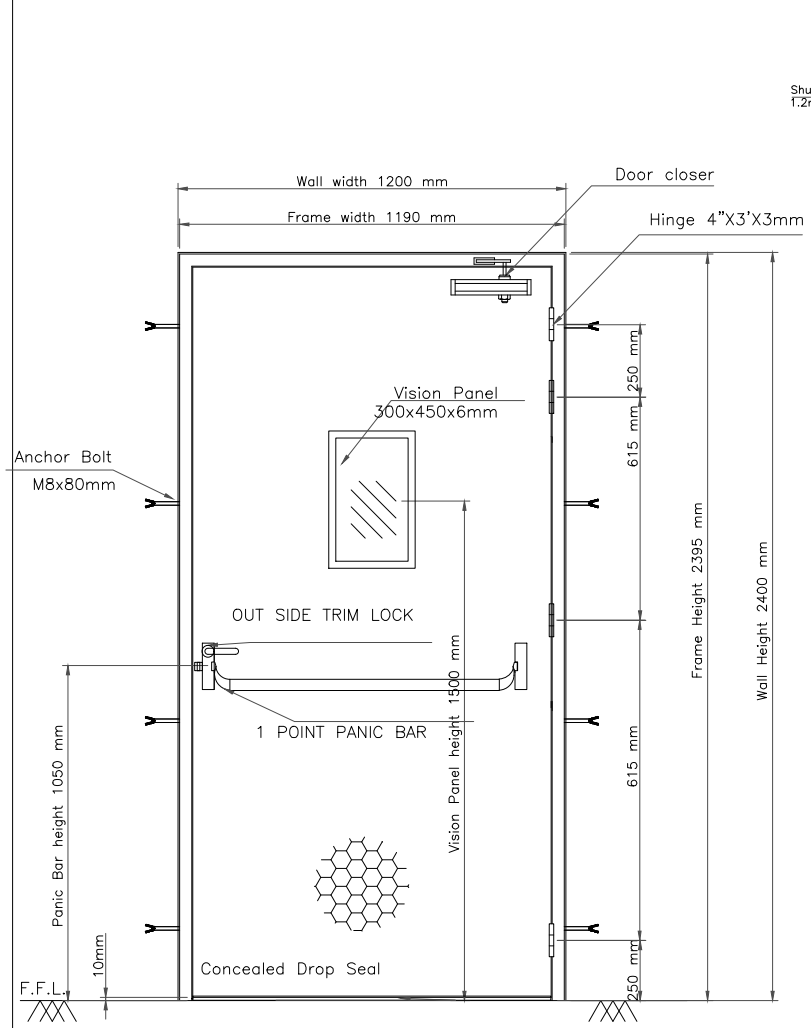

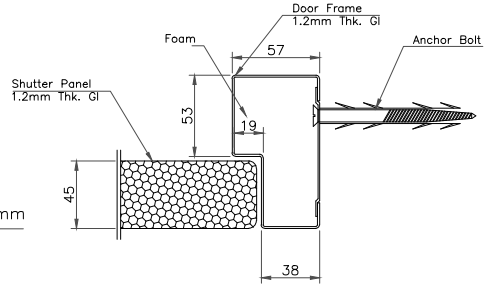

Section S1–S1
Frame Details



HANDING DETAILS

LHR	Inside / Outside key	LEFT HAND REVERSE
RHR	Inside / Outside key	RIGHT HAND REVERSE

NOTES :–

Frame Joint Type :– Bolted joint

Frame Profile(DxH):– 100 x 57mm.

RAL Shade Code :– RAL

Infill :– Honey Comb

Type :– 2Hr un–insulated door as per IS 3614–2021

Hardware/Accessories Description

1. SS BB Hinges "4x3x3"–Geze
2. Door Closer Std Arm – Geze TS 1000
3. Single Point Panic Bar– Geze
4. External trim with half EPC – Geze
5. 2 Hr.Fire Rated Vision Glass 300 x 450mm
6. Concealed Drop Seal
7. Door Stopper

SINGLE LEAF DOOR

NOTE :

LOCATION :

	WH01A		WH01B		WH02		WH03		WH04		TOTAL
	LHR	RHR	LHR	RHR	LHR	RHR	LHR	RHR	LHR	RHR	
	4 NOS	1 NOS	0 NOS		2 NOS	1 NOS	0 NOS	3 NOS	2 NOS	2 NOS	15 NOS

TITLE - DOOR AUTOMATION

DWG NO - NTPL-308-PM-01

	NAME	SIGNATURE	DATE
DRAWN	J.P.		11-12-2025
CHK'D	B.S.		11-12-2025
APPV'D	V.T.		11-12-2025

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

PRODUCT - FIRE RATED DOOR

PROJECT NO - NTPL- 308 REVISION - 02

SITE LOCATION - CHENNAI

MATERIAL - QTY - 15

PROJECTION METHOD

SCALE :

SHEET 1 OF 1