SKYLIGHT – FIXED PANEL FABRICATION DRAWING

W 5,400 mm x L 4,963 mm | 1 No. Fixed Panel | MS Square Tube Frame + SS Perforated Ventilation + 11.5mm Laminated Glass | 7° Incline for Rain Drainage

Vijay Waghe

Ref: Site sketch 16-Jun-2026

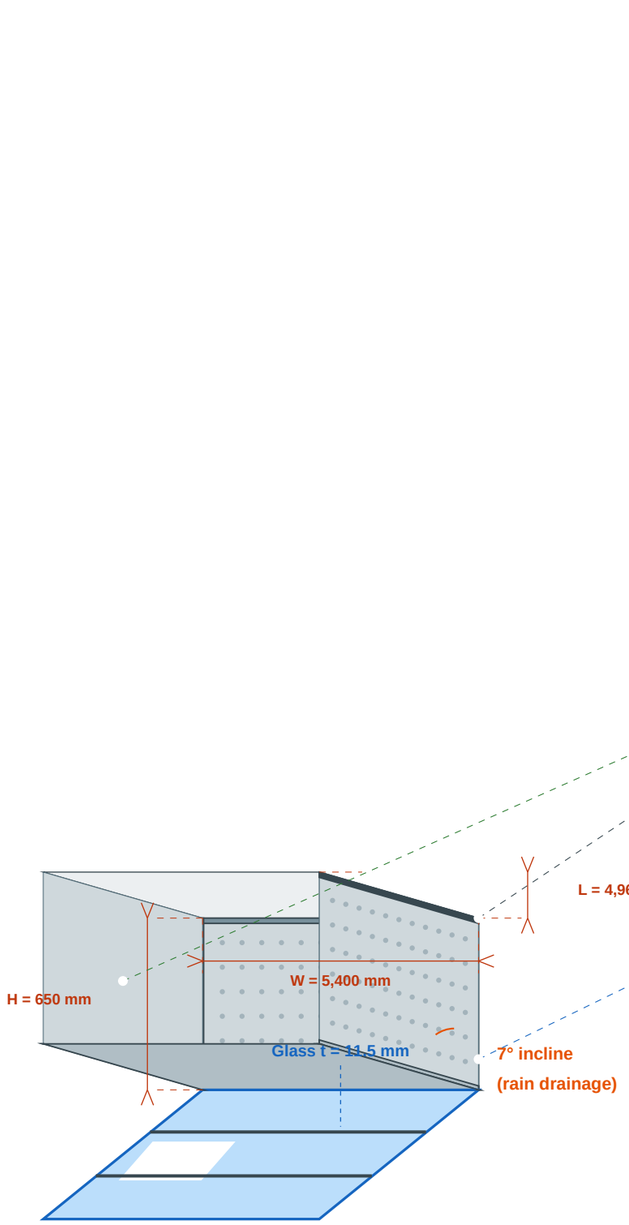

① MS SQUARE TUBE FRAME

Material: Mild Steel (IS 2062 Gr. A)
Section: 50x50x3 mm SHS (Sq. Hollow Section)
Members: Perimeter rails (top+bottom), 4 corner posts, 2 purlins under glass
Finish: 1 coat red-oxide primer + 2 coats

② SS PERFORATED VENTILATION SHEET

Material: SS 304, 22 SWG (0.71 mm thick)
Hole dia: 3 mm, Pitch: 6 mm (staggered)
Open area: ~35% | All 4 sides fitted
Purpose: Natural cross ventilation
Fixing: Bolted to MS frame @ 150 mm c/c

③ LAMINATED GLASS – 11.5 mm

Makeup: 5 mm clear + 1.5 mm PVB + 5 mm clear
Total thickness: 11.5 mm (safety laminated)
Size: W 5,400 x L 4,963 mm (1 panel, fixed)
Incline: 7° (front low → rear high)
Rain water drains to front gutter auto.
Fixing: Structural silicone + aluminium glazing

GENERAL NOTES

Overall size: W 5,400 x L 4,963 mm
Panel type: 1 No. Fixed (non-operable)
All welding: SMAW/MIG, grind flush & smooth
All dims in mm. Actual site dims to be verified.
Drawing for reference only – not for approval.

GLASS SECTION DETAIL (not to scale)

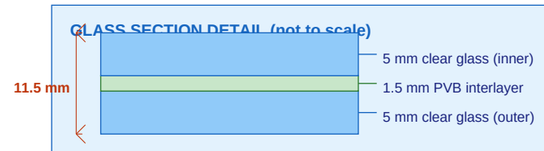

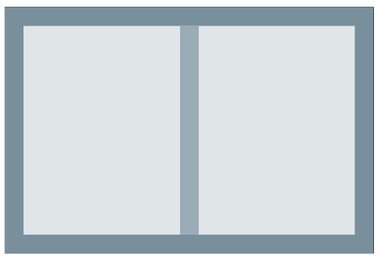

FRONT ELEVATION (L = 4,963 mm)
SS perf sheet both sides | MS frame border



SIDE ELEVATION (W = 5,400 mm)
Glass inclined 7° | MS tube + SS perf sides

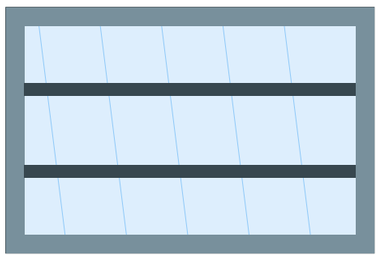

TOP PLAN VIEW (Glass panel + Purlins)
11.5 mm lam. glass | 2 MS purlins @ 1/3 pts