NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

Project Name: Beckman Coulter BDC @ Bangalore

Technical Specifications

Sr. No	Product Name	Pages
A.	Retractable Dock Shelter	1
B.	Rolling Shutter	1
C.	Sectional Door	2
D.	Scissor Lift	3

A) Retractable Dock Shelter



Retractable Dock Shelter



Docking System (Sectional Door, Dock Shelter)

Sr. No	Description	Specification
1	Size	(W) 3400 mm x (H) 4600 mm
2	Quantity	2 Nos
3	Curtain colour	Black
4	Parking Guides	White, Yellow
5	Wall Fixings	Concrete, Sandwich light Concrete, Load house cavity, insulated panel
6	Top & Side Curtaiins	Double Layer High Quality Polyester
7	Thickness	3.0 mm
8	Weight	Approx 3400 g/m2
9	Continous Roof Cover	One layer high quality Polyester
10	Thickness	0.5 mm

B) Single Skinned Motorised Rolling Shutter





Sr. No	Specification	GI Motorized Rolling Shutter
1	Description:	Motorised Rolling Shutter with GI Laths with thickness of 1 mm.
2	Size	(W)2500 x (H)3500 mm
3	Mounting Location area	Inside area / Outside area
4	Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side
5	Curtain Panel	The panel made of 1.0mm thick MS.
6	Curtain panel size	75mm wide
7	Curtain Profile	Curved
8	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
9	Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
10	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
11	Side Brackets	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
12	Hood Cover	Made of GI Sheet Thickness 1.2 mm GF mm with 25x25x3mm angle stiffener
13	Surface finish	Powder coated
14	Drive Unit & Mounting Type	Electric Motor - Direct Mounting - Sprocket chain arrangement – IP54 Protection

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019


An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM


C) Sectional Door



OH1042P





Horizontal Lift



Sr. No	Description	Specification
1	Size	(W) 2500 mm X (H) 3500 mm
2	Quantity	RO
3	Vision Windows	2 Nos at central panel
4	Opening Direction & Mounting	Horizontal lift
5	Opening/Closing Speed	CDM9 0,28 m/s
6	Door Material	GI Steel
7	Panel Thickness	42 mm Square Grid, steel sheet
8	Filling	CFC-free polyurethane
9	Panel colour	RAL 9002 Grey White Powder coated
10	Door sealent	All door sealants made of EPDM rubber, temperature resistant -30/+70
11	Panel Flame Retardent standrad	Flame retardant polyurethane foam according DIN4102-class B2.
12	Water Penetration	EN 12425 class 3
13	Air Permealibity	EN12426 class 3
14	Wind Load	EN21424 class 3
15	Thermal Transittance	EN 12428 1.10W /m2K
16	Bottom sealing	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
17	Door saftey	Doors equiped with spring break device
18	Incase of Power failuer	Doors to be equiped with quick release fuction
19	Operator power conumption	Operator to have a maximum power consumption of 0,37kW and a standby consumption of Maximum 15W
20	Drive Unit & Mounting Type	Single phase 230V direct drive on shaft
21	Emergency Operation	by Disengagement rope manual
22	Operating Switch	Up/Down Keypad + stopbutton
23	Locks : Lock bolt	The Lock bolt locks the door from the inside, without the use of a key. The Lock bolt is not visible from the outside.
24	Environmental Green Product Declaration Certification	As per ISO 14025 and EN 15804

Additional Accessories Required


Sr. No	Description	Specifications
1	Extra Push Button 	An extra control box is installed outside the building or inside close to the door if the main control unit needs to be installed away from the door opening. Installed on the inside or outside wall beside the door.
2	Flashing Lights	Lights are used to display the current door behavior. Flashing light will flash during door movement.
3	Safety Photocell 	A set of photocells on pillars, on each side of the door. When a person or vehicle passes between the photocells, the beam is interrupted and the door opens. Photocells installed on pillars, away from the door.
4	Pull Cord 	A pull-rope switch above the door opening can be operated from e.g. a forklift truck. Pulling the rope opens a closed door or closes an opened door. Installed on the inside construction above the door

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

D) Dock Leveller

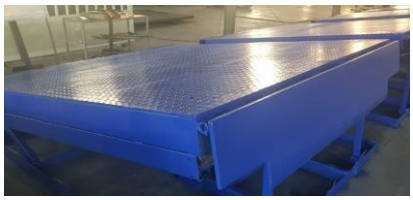



Description	Specifications
Capacity	6 Ton
Dock operation mode	AC power pack hydraulically operated
Lip operation mode	Hydraulic
Operation control	Through panel
Loading platform height from road	1250mm
Travel above & below dock level	(+) 300 / (-) 250 mm
Platform Size (W x L)	2200 mm x 2500 mm
Lip size (W x L)	2200 x 2500 mm
Shut Height	480 mm
Overall length	2200mm x 2500mm + Lip Length (400mm)
Maximum slope can be achieved	10%
Clear Pit dimensions (W x L x D)	(W) 2250 mm x (L) 2550 mm x (D)485 mm
Hydraulic power pack	Standard
Driver type	Direct by electric Motor
Motor Ratings	1 H.P
Pump design flow	2.5 LPM
Pump pressure	120 bar Operating 200 bar Max.
Safety valve set pressure	120 Kg/cm²
Pump Type	Gear
Volume of oil receiver	7 Lit
No Of Deck cylinder	2 No
Lip Cylinder	1 No
Dock Bumper	Pair of Dock Bumper