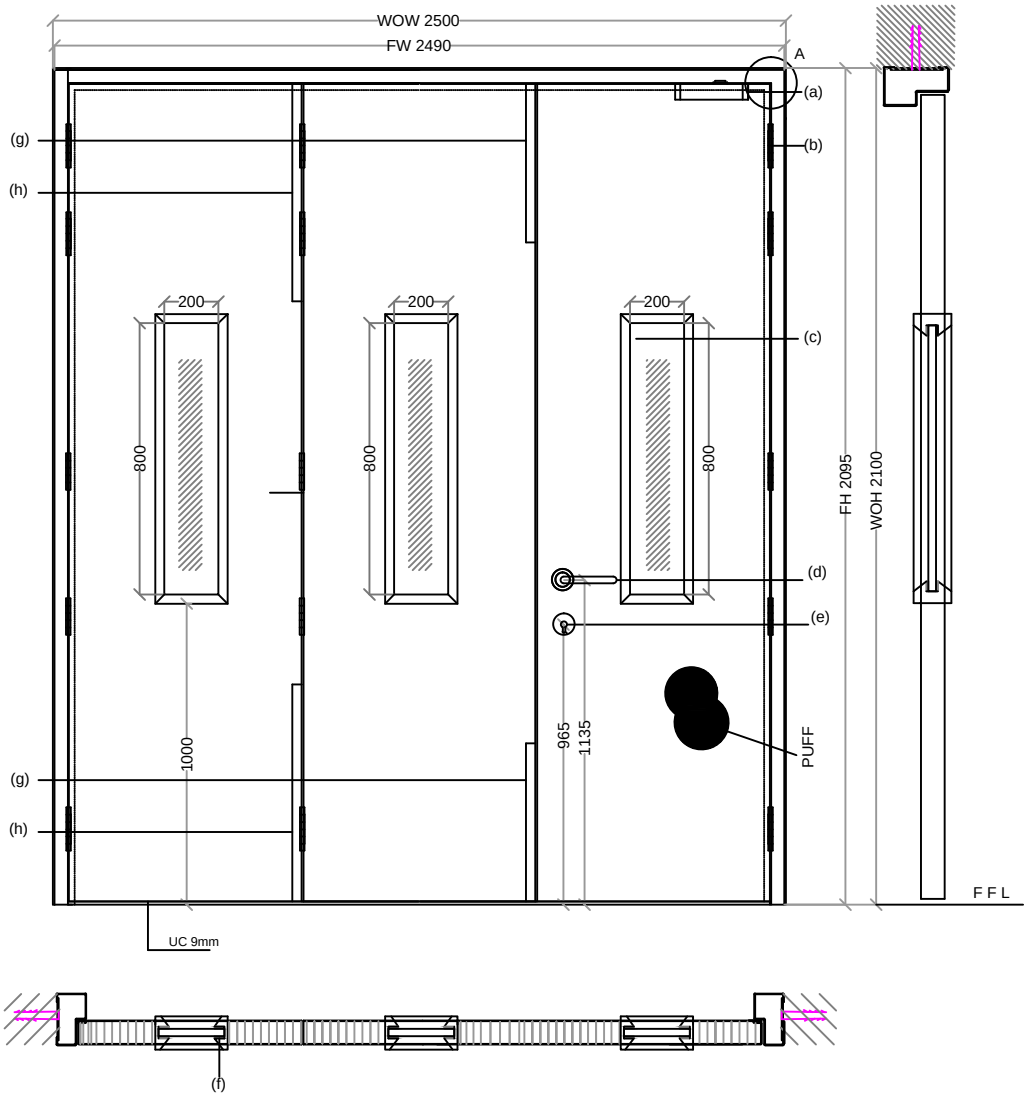




Abbrevation's:
WOW-Wall Opening Width
FW-Frame Width
WOH-Wall Opening Height
FH-Frame Height
UC-Under Cut
FFL-Finished Floor Level

A



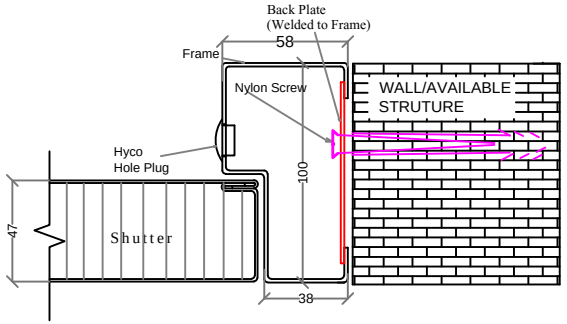

| ITEM | HARDWARE | ITEM DESCRIPTION |
|---|---|---|
| a | DOOR CLOSER | Door Closer F6424 Std Arm. |
| b | HINGES | SS Ball Bearing Butt Hinges(100X75X3mm) |
| c | GLASS | Singal Glazed Clear Float Vision Glass 200x800mm |
| d | HANDLE | SS Lever Handle |
| e | LOCK | Mortice Sash Lock With Both Side Key Operation |
| f | TAPE | Adhesive Tape & Fasteners |
| g | FLUSH BOLT | Concealed Flush Bolt -300mm |
| h | FLUSH BOLT | Concealed Flush Bolt -600mm |

SHUTTER & FRAME & FIXING DETAILS

| | | | |
|---|---|---|---|
| SHUTTER THICKNESS | 47mm | Color | paint |
| SHUTTER SHEET THICKNESS | 0.8mm | | |
| FRAME SHEET THICKNESS | 1.2mm | Quantity | 1 NO |
| MATERIAL | GI | | |
| FIXING ON | Solid Brick Plastered Wall | | |

NOTE:- All Dimensions are in mm.
The Drawing Is For Location of Hardware only.
Drawing Does Not Represent The Actual Hardware.
For More Clarity,Please Go Through Hardware Brochure.

TOLERANCE : All Linear Dimensions ±3 mm,Others ±1mm




| DOOR TYPE | NOMENCLATURE | WOW | WOH | LOCATION | RO=TYPE 3 | RI=TYPE 1 | LO=TYPE 4 | LI=TYPE2 | TOTAL |
|---|---|---|---|---|---|---|---|---|---|
| STEEL DOOR | 8 SD | 2500 | 2100 | ROOF LEVEL | 1 | 0 | 0 | 0 | 1 |

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE
SINGLE LEAF STEEL DOOR

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY
PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

| | SIGN | DATE |
|---|---|---|
| DRAWN | OMKAR | 29/03/16 |
| CHECK | ANIL | 29/03/16 |
| REV. | 01 | |
| APPROVAL | | |

If any queries contact : projects@nihva.com

ALL DIMENSION ARE IN mm

CLIENT - TAIIN STEELS FAB & INFRA PVT.LTD.
PROJECT - HYOSUNG T&D
SITE -
DWG. NO. : NIHVA/15-16/212/3
SCALE: 01 | WT: | SHEET: 01 OF 01