High-Performance Door
Albany RR200

ASSA ABLOY

ASSA ABLOY Entrance Systems


The global leader in
door opening solutions



High-Performance Door Albany RR200

The Albany RR200 high-performance roller door with innovative guides for universal interior use.



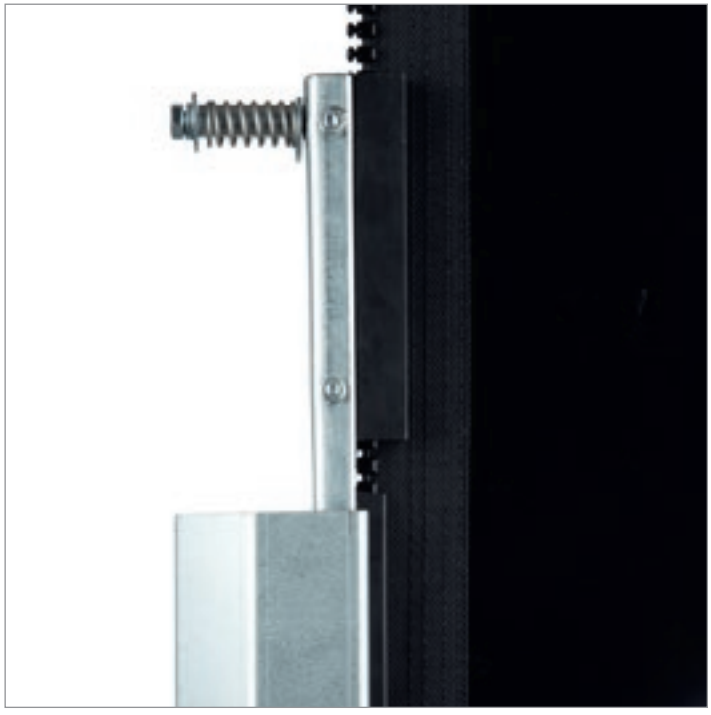

Self-lubricating vertical guides made of plastic



PVC fabric with zip closure system



The side frames are made of galvanised steel with anodised aluminium cladding

ASSA ABLOY, Besam, Crawford, Albany and Megadoor, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

High-Performance Door Albany RR200

ADVANTAGES OF THE DOOR

- High-performance roller door with innovative guides for universal interior use
- Space-saving design due to thin side frames
- Quick opening and closing due to modern drive technology and frequency inverter control system MCS
- Quick and easy installation
- Innovative guides in the side frames combine reliable crash mechanics and low air permeability when the door is closed
- Curtain with zip closure system: The curtain automatically threads back in after a crash, without a loss of production or repair costs
- Completely flexible curtain without rigid bottom profile
- Effective shielding against dust, dirt, draughts and moisture penetration

SIDE FRAMES

The side frames are made of galvanised steel with anodised aluminium cladding. The self-lubricating vertical guides made of plastic.

SAFETY FEATURES

The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1. As standard the door is equipped with a door line photocell installed in the side frame. In addition, there is an electrical self-testing safety edge inside the flexible bottom profile, which is connected wirelessly to the control unit. In the event of a power failure, the door can be opened via a hand crank. A hand chain is also available.

CONTROL SYSTEM

MCS frequency inverter control system with integrated operation unit.

DRIVE UNIT

The drive unit is designed as an attachable gear motor with crash-safe gears. It may be fitted on the right or left.

DOOR CURTAIN

The flexible curtain is made of resistant PVC fabric with zip closure system to increase wind resistance. Optional horizontal view strips, height 400 of 800 mm, or with windows 640 x 580 mm are possible. It is even possible to choose different colors. Please refer to the table opposite for the individual options.

BOTTOM PROFILE SOFT EDGE

The door has a completely flexible curtain without rigid bottom profile that means collisions remain hereby without large damages.

BREAKAWAY MECHANISM

Due to the curtain guide in the side frame using a zip closure system and the flexible door curtain closure, the curtain is automatically threaded back into the side guides after collision with an object.

SAFETY ADVICE

Depending on the local situation additional safety device and pulse generators over and above this standard may be sensible or necessary. Difficult environmental conditions may also influence the choice of the right door. In such situations, we recommend that you consult our local sales engineers for expert advice on specific situations.

TECHNICAL DATA


Model	Albany RR500
Application	Interior door
Door dimensions (mm) (DW min./max.) (DH min./max.)	 1000/4000 1000/4000
max. area	16 m²
Speed Open/Close max. (m/s) [2]	1,5 / 0,6 m/s
Wind resistance (EN 12424)	Class 1
Air permeability (EN 12426)	Class 1
Watertightness (EN 12425)	Class 2
UD value W/m²K according EN 12428	6,02 W/m²K
Temperature range max. [3]	0 – +60 °C
Material	
Side frame	Aluminum anodized
Bottom profile [2]	Flexible PVC
Winding shaft	Steel
Top roll cover	Aluminum anodized
Motor cover	Plastic, Grey (RAL 7040)
Safety features	
Electrical self-testing safety edge [2]	✓
Door line photocell in the side frames	✓
Fall down protection within gear motor	✓
Knock-Out Capability self repairing	✓
Selfopening manual	✓ Crank handle
Equipment	
LED Traffic strip	•
Cable channel	✓
Fender	•
Traffic light / Flash light	•
Lintel seal	✓
Drive unit / control system	
Control system	MCS-FC
Display	Plain text
Control voltage	24 V DC
Protection	IP 54
Fuse protection	10 - 16 A (B-Charakteristic)
Motor power	0,65 kW
Network connection	
MCS-FC	3-pole with CEE plug blue 1/(N)PE 230V 50-60Hz
Door curtain	**Colored PVC-fabric „Top“** (Color code according to RAL color card)
Windows	•
Vision panels	•
Wind taps	✓ = Zipper
Blue	✓ 5002
Orange	✓ 2004
Grey	✓ 7035
Yellow	✓ 1003
Green	✓ 6005
Red	✓ 3000
White	✓ 9010
Black	✓ 9005

• Option
✓ Standard


[2] Differences possible depending on other performance
[3] Depending on cycle/minute, door size and mounting place

General drawing Albany RR200

without cover | with cover | with cover

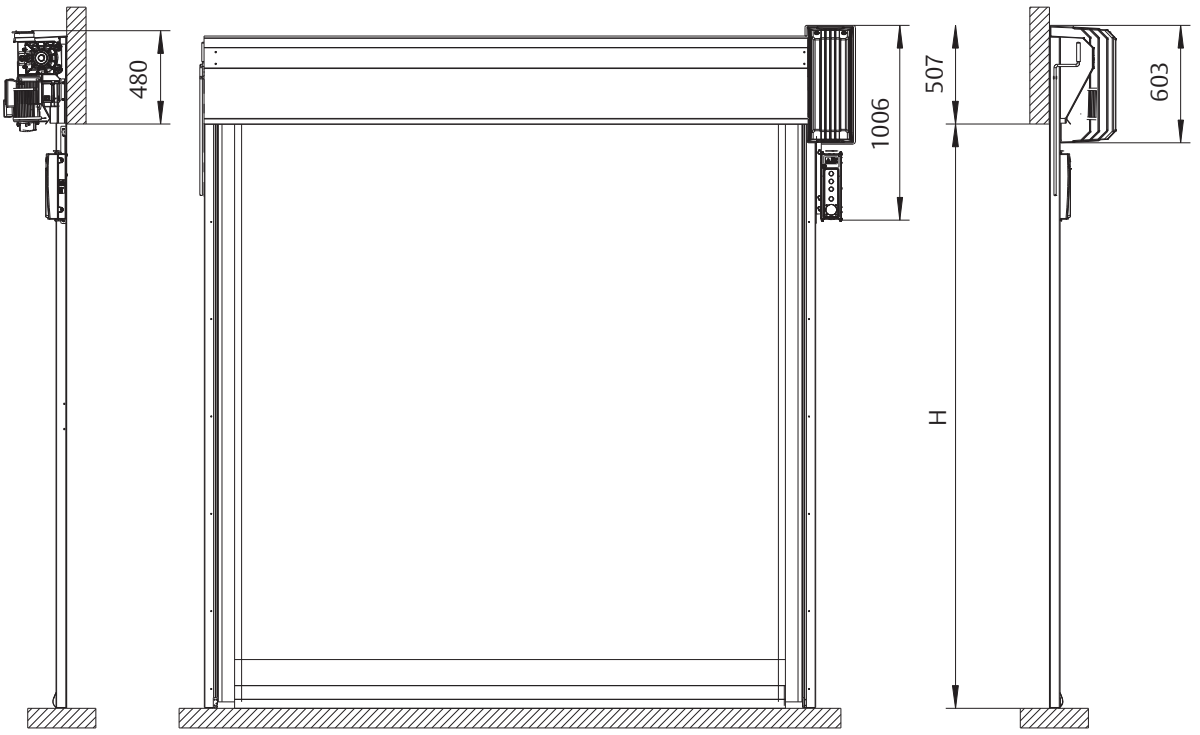

with cover

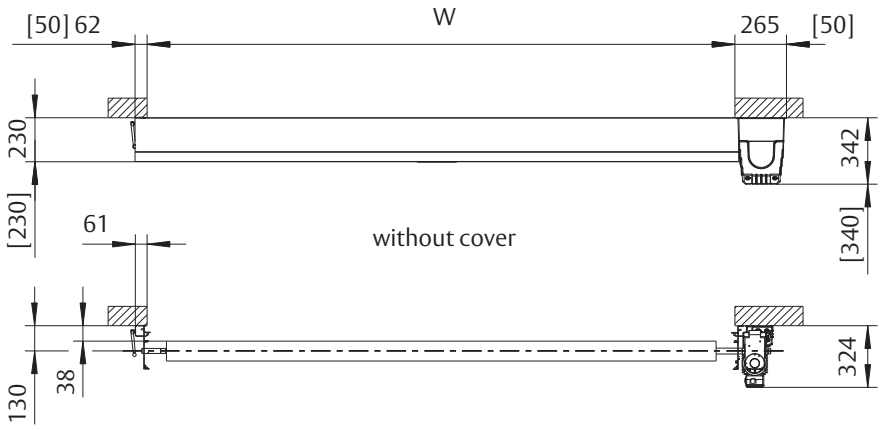


[ ] = Space needed for installation

Control system			
		MCS	MCC
Dimensions W × H × D	mm	106 × 355 × 106	220 × 380 × 100

Available sizes			
		W	H
max. 16 m²	min:	1000	1000
	max:	4000	4000

Fixing plan Albany RR200

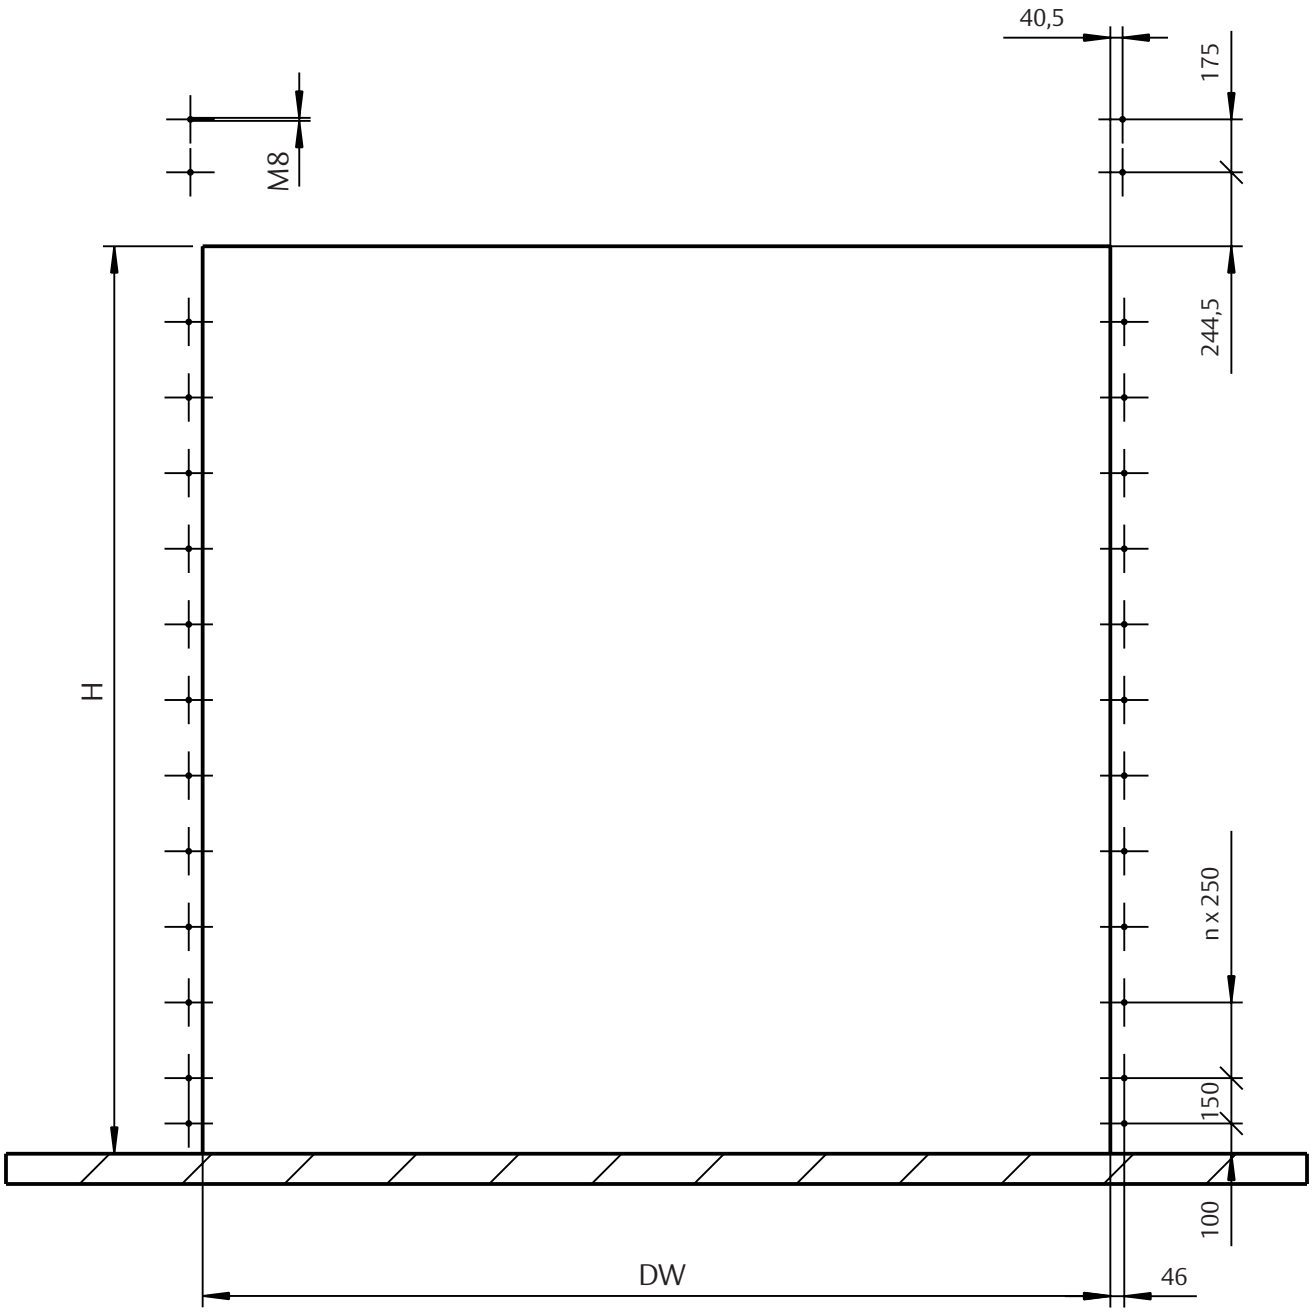

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, Albany and Megadoor, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.
ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

assaabloyentrance.com



ASSA ABLOY Entrance Systems

info.aaes@assaabloy.com
assaabloyentrance.com

Follow us:

Please enter *ASSA ABLOY Entrance* in the channel's search field.

© ASSA ABLOY Entrance Systems AB PL.MAN/Albany RR200/DEU.EN-1.1/1612/64 100 375 Technical data subject to change without notice