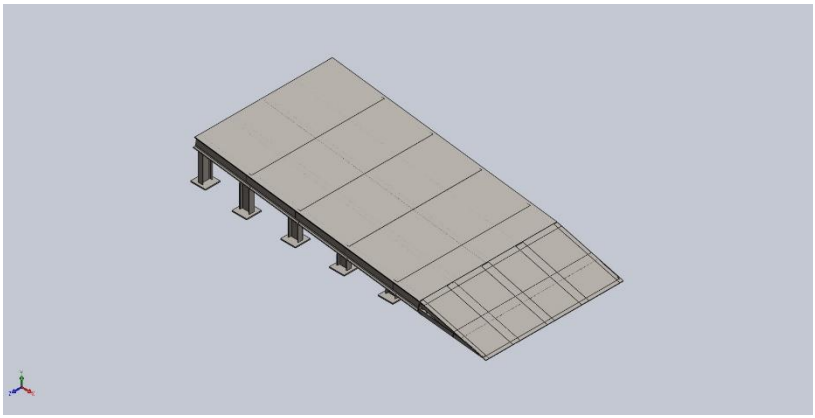
NIHVA TECHNOLOGIES



Simulation of 03Assem1

Date: 15 APRIL 2026
Designer: BHARATI SABALE
Study name: Static 1
Analysis type: Static

Table of Contents

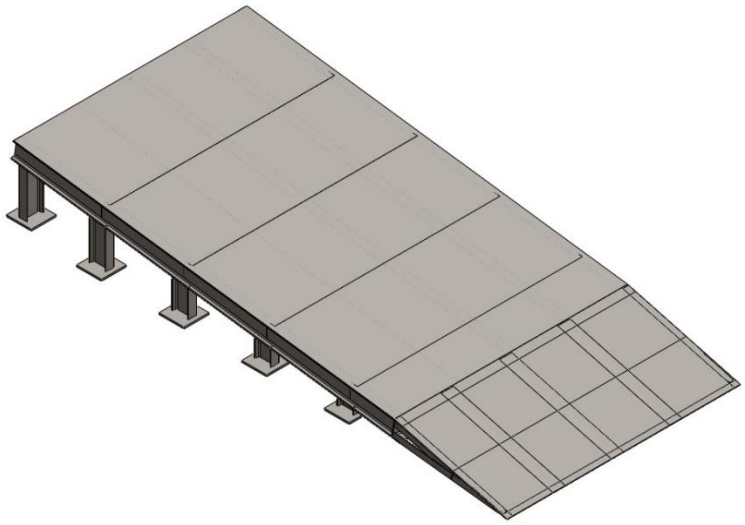
Description 1
Assumptions 2
Model Information 3
Study Properties 13
Units 13
Material Properties 14
Loads and Fixtures 17
Connector Definitions 18
Interaction Information 18
Mesh information 19
Sensor Details 19
Resultant Forces 20
Beams 21
Study Results 29
Conclusion 31

Description

No Data

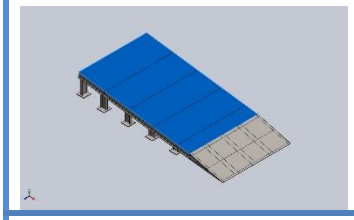
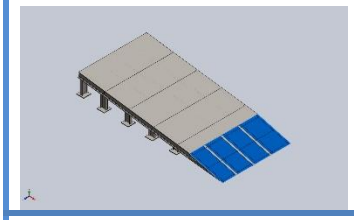
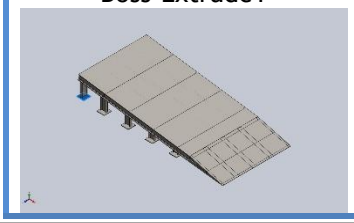
Assumptions

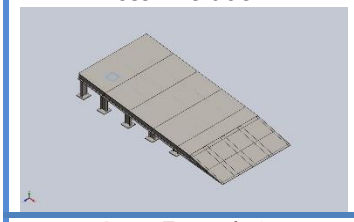
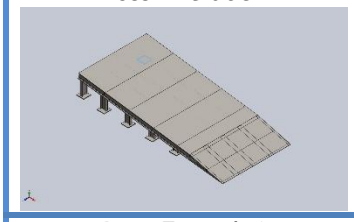
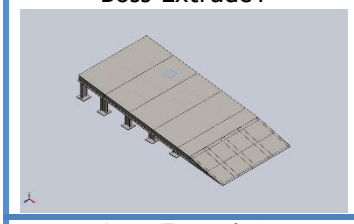
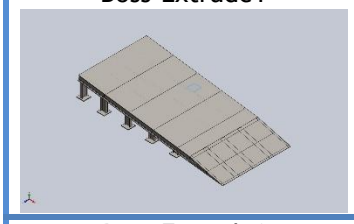
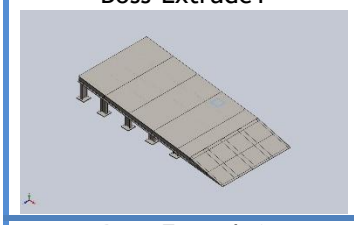
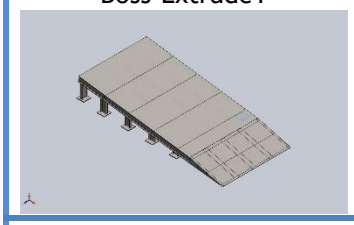
Model Information

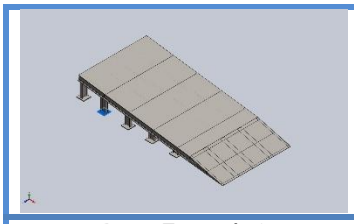
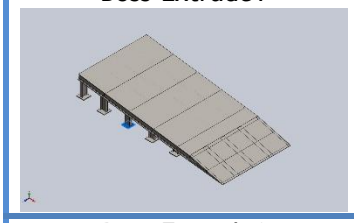
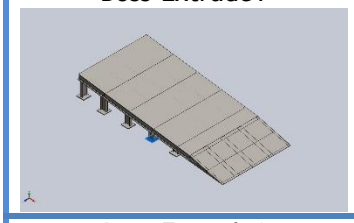
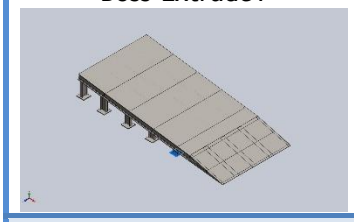


Model name: 03Assem1
Current Configuration: Default



Solid Bodies






Document Name and Reference	Treated As	Volumetric Properties	Document Path/Date Modified
Boss-Extrude1 	Solid Body	**Mass:126.66 kg** **Volume:0.016135 m^3** **Density:7,850 kg/m^3** **Weight:1,241.27 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03CHEQURED PLATE.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:38.465 kg** **Volume:0.0049 m^3** **Density:7,850 kg/m^3** **Weight:376.957 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03SS PLATE.SLDPRT** Oct 21 06:22:15 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025






Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 -**






			**ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03bottom plate.SLDPRT** Oct 19 18:40:39 2025






Beam Bodies:






Document Name and Reference	Formulation	Properties	Document Path/Date Modified
SolidBody 1(Trim/Extend1[5]) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.000319635m^2 Length:650.834mm Volume:0.000155116m^3 Mass Density:7,850kg/m^3 Mass:1.21766kg Weight:11.9331N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 2(Cut-Extrude2) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/angle iron Section Area: 8.65191e-05m^2 Length:1,400mm Volume:0.000121127m^3 Mass Density:7,850kg/m^3 Mass:0.950845kg**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025






		Weight:9.31828N	
SolidBody 3(Cut-Extrude4) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/angle iron Section Area: 0.000715454m^2 Length:1,400mm Volume:0.00100164m^3 Mass Density:7,850kg/m^3 Mass:7.86284kg Weight:77.0558N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 4(Trim/Extend1[1]) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.000319635m^2 Length:650.834mm Volume:0.000155116m^3 Mass Density:7,850kg/m^3 Mass:1.21766kg Weight:11.9331N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 5(Trim/Extend1[2]) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.000856274m^2 Length:693.682mm Volume:0.000479396m^3 Mass Density:7,850kg/m^3 Mass:3.76326kg Weight:36.88N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 6(Trim/Extend1[4]) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.000856274m^2 Length:693.682mm Volume:0.000479396m^3 Mass Density:7,850kg/m^3 Mass:3.76326kg Weight:36.88N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 7(Trim/Extend1[3]) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.000856274m^2 Length:693.682mm Volume:0.000479396m^3 Mass Density:7,850kg/m^3 Mass:3.76326kg Weight:36.88N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025

SolidBody 8(C channel 100 X 10(1)) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,400mm Volume:0.00183425m^3 Mass Density:7,850kg/m^3 Mass:14.3988kg Weight:141.109N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 9(Angle iron 35 X 35 X 5(1)[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/angle iron Section Area: 0.000319635m^2 Length:676.965mm Volume:0.000201915m^3 Mass Density:7,850kg/m^3 Mass:1.58504kg Weight:15.5333N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 10(Angle iron 35 X 35 X 5(1)[2]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/angle iron Section Area: 0.000319635m^2 Length:668.363mm Volume:0.00020192m^3 Mass Density:7,850kg/m^3 Mass:1.58507kg Weight:15.5337N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03DOCK RAMP2.SLDPRT** Oct 21 06:22:14 2025
SolidBody 1(Cut-Extrude5[5]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:2,265.04mm Volume:0.0024703m^3 Mass Density:7,850kg/m^3 Mass:19.3919kg Weight:190.04N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 2(C channel 100 X 10(1)[4]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,350mm Volume:0.00176877m^3 Mass Density:7,850kg/m^3 Mass:13.8849kg Weight:136.072N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025

SolidBody 3(Cut-Extrude5[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:2,307.92mm Volume:0.00251577m^3 Mass Density:7,850kg/m^3 Mass:19.7488kg Weight:193.539N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 4(Cut-Extrude5[3]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:2,282.6mm Volume:0.00248845m^3 Mass Density:7,850kg/m^3 Mass:19.5343kg Weight:191.436N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 5(C channel 100 X 10(1)[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,350mm Volume:0.00176877m^3 Mass Density:7,850kg/m^3 Mass:13.8849kg Weight:136.072N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 6(Cut-Extrude2[6]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:300mm Volume:0.000327009m^3 Mass Density:7,850kg/m^3 Mass:2.56702kg Weight:25.1568N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 7(Cut-Extrude2[8]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:234.243mm Volume:0.000255332m^3 Mass Density:7,850kg/m^3 Mass:2.00436kg Weight:19.6427N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025

SolidBody 8(Cut-Extrude2[9]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:168.486mm Volume:0.000183655m^3 Mass Density:7,850kg/m^3 Mass:1.44169kg Weight:14.1285N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 9(Cut-Extrude2[5]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:300mm Volume:0.000327009m^3 Mass Density:7,850kg/m^3 Mass:2.56702kg Weight:25.1568N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 10(Cut-Extrude2[10]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:102.728mm Volume:0.000111977m^3 Mass Density:7,850kg/m^3 Mass:0.879021kg Weight:8.61441N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 11(C channel 100 X 10(1)[3]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,350mm Volume:0.00176877m^3 Mass Density:7,850kg/m^3 Mass:13.8849kg Weight:136.072N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 12(Cut-Extrude2[11]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.000166371m^2 Length:92.0026mm Volume:4.02998e-05m^3 Mass Density:7,850kg/m^3 Mass:0.316354kg Weight:3.10027N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025

SolidBody 13(Cut-Extrude5[2]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:2,307.92mm Volume:0.00251577m^3 Mass Density:7,850kg/m^3 Mass:19.7488kg Weight:193.539N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 14(Cut-Extrude2[7]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:300mm Volume:0.000327009m^3 Mass Density:7,850kg/m^3 Mass:2.56702kg Weight:25.1568N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 15(Sb beam 100 X 8(1)[4]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:1,300mm Volume:0.00141704m^3 Mass Density:7,850kg/m^3 Mass:11.1238kg Weight:109.013N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 16(Cut-Extrude2[12]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:234.248mm Volume:0.000255338m^3 Mass Density:7,850kg/m^3 Mass:2.0044kg Weight:19.6431N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 17(Cut-Extrude2[13]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:168.491mm Volume:0.00018366m^3 Mass Density:7,850kg/m^3 Mass:1.44173kg Weight:14.129N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025

SolidBody 18(Cut-Extrude5[4]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:2,265.04mm Volume:0.0024703m^3 Mass Density:7,850kg/m^3 Mass:19.3919kg Weight:190.04N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 19(Cut-Extrude2[14]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:102.734mm Volume:0.000111983m^3 Mass Density:7,850kg/m^3 Mass:0.879066kg Weight:8.61484N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 20(Cut-Extrude2[15]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.000166394m^2 Length:92.0026mm Volume:4.03055e-05m^3 Mass Density:7,850kg/m^3 Mass:0.316398kg Weight:3.1007N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 21(Cut-Extrude5[6]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:2,265.04mm Volume:0.0024703m^3 Mass Density:7,850kg/m^3 Mass:19.3919kg Weight:190.04N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025
SolidBody 22(C channel 100 X 10(1)[2]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,350mm Volume:0.00176877m^3 Mass Density:7,850kg/m^3 Mass:13.8849kg Weight:136.072N**	**E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY\03sissior lift ramp.SLDPRT** Oct 21 06:22:14 2025

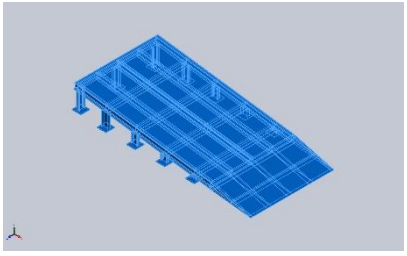
Study Properties

Study name	Static 1
Analysis type	Static
Mesh type	Mixed Mesh
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	Automatic
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (E:\NIHVA AUTOMATION 2026\AUTOMATION\DOCK RAMP\dock ramp -03 - ASSA ABLOY)

Units

Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m^2

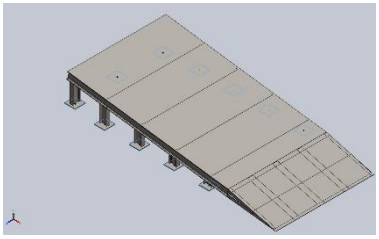
Material Properties

Model Reference	Properties	Components
	**Name:** AISI 1045 Steel, cold drawn **Model type:** Linear Elastic Isotropic **Default failure criterion:** Max von Mises Stress **Yield strength:** 5.3e+08 N/m^2 **Tensile strength:** 6.25e+08 N/m^2 **Elastic modulus:** 2.05e+11 N/m^2 **Poisson's ratio:** 0.29 **Mass density:** 7,850 kg/m^3 **Shear modulus:** 8e+10 N/m^2 **Thermal expansion coefficient:** 1.15e-05 /Kelvin	SolidBody 1(Boss-Extrude1)(03CHEQURED PLATE-1), SolidBody 1(Trim/Extend1[5])(03DOCK RAMP2-1), SolidBody 2(Cut-Extrude2)(03DOCK RAMP2-1), SolidBody 3(Cut-Extrude4)(03DOCK RAMP2-1), SolidBody 4(Trim/Extend1[1])(03DOCK RAMP2-1), SolidBody 5(Trim/Extend1[2])(03DOCK RAMP2-1), SolidBody 6(Trim/Extend1[4])(03DOCK RAMP2-1), SolidBody 7(Trim/Extend1[3])(03DOCK RAMP2-1), SolidBody 8(C channel 100 X 10(1))(03DOCK RAMP2-1), SolidBody 9(Angle iron 35 X 35 X 5(1)[1])(03DOCK RAMP2-1), SolidBody 10(Angle iron 35 X 35 X 5(1)[2])(03DOCK RAMP2-1), SolidBody 1(Boss-Extrude1)(03SS PLATE-1), SolidBody 1(Boss-Extrude1)(03bottom plate-1), SolidBody 1(Boss-Extrude1)(03bottom plate-13), SolidBody 1(Boss-Extrude1)(03bottom plate-15), SolidBody 1(Boss-Extrude1)(03bottom plate-17),

		SolidBody 1(Boss-Extrude1)(03bottom plate-19), SolidBody 1(Boss-Extrude1)(03bottom plate-21), SolidBody 1(Boss-Extrude1)(03bottom plate-23), SolidBody 1(Boss-Extrude1)(03bottom plate-3), SolidBody 1(Boss-Extrude1)(03bottom plate-5), SolidBody 1(Boss-Extrude1)(03bottom plate-7), SolidBody 1(Boss-Extrude1)(03bottom plate-9), SolidBody 1(Cut-Extrude5[5])(03sissior lift ramp-1), SolidBody 2(C channel 100 X 10(1)[4])(03sissior lift ramp-1), SolidBody 3(Cut-Extrude5[1])(03sissior lift ramp-1), SolidBody 4(Cut-Extrude5[3])(03sissior lift ramp-1), SolidBody 5(C channel 100 X 10(1)[1])(03sissior lift ramp-1), SolidBody 6(Cut-Extrude2[6])(03sissior lift ramp-1), SolidBody 7(Cut-Extrude2[8])(03sissior lift ramp-1), SolidBody 8(Cut-Extrude2[9])(03sissior lift ramp-1), SolidBody 9(Cut-Extrude2[5])(03sissior lift ramp-1), SolidBody 10(Cut-Extrude2[10])(03sissior lift ramp-1), SolidBody 11(C channel 100 X 10(1)[3])(03sissior lift ramp-1),

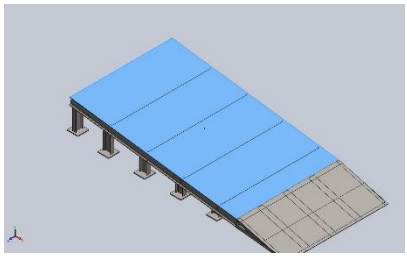
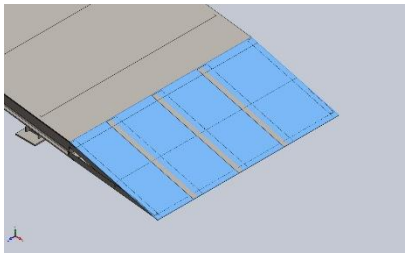
		SolidBody 12(Cut-Extrude2[11])(03sissior lift ramp-1), SolidBody 13(Cut-Extrude5[2])(03sissior lift ramp-1), SolidBody 14(Cut-Extrude2[7])(03sissior lift ramp-1), SolidBody 15(Sb beam 100 X 8(1)[4])(03sissior lift ramp-1), SolidBody 16(Cut-Extrude2[12])(03sissior lift ramp-1), SolidBody 17(Cut-Extrude2[13])(03sissior lift ramp-1), SolidBody 18(Cut-Extrude5[4])(03sissior lift ramp-1), SolidBody 19(Cut-Extrude2[14])(03sissior lift ramp-1), SolidBody 20(Cut-Extrude2[15])(03sissior lift ramp-1), SolidBody 21(Cut-Extrude5[6])(03sissior lift ramp-1), SolidBody 22(C channel 100 X 10(1)[2])(03sissior lift ramp-1)
Curve Data:N/A		

Loads and Fixtures

Fixture name	Fixture Image	Fixture Details
Fixed-1		**Entities:** 11 face(s) **Type:** Fixed Geometry

Resultant Forces

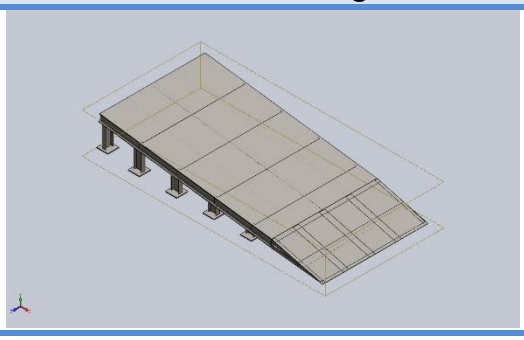
Components	X	Y	Z	Resultant
Reaction force(N)	975.833	4,893.1	0.000465393	4,989.46
Reaction Moment(N.m)	0	0	0	1e-33

Load name	Load Image	Load Details
Force-1		**Entities:** 1 face(s) **Type:** Apply normal force **Value:** 2,500 N
Force-2		**Entities:** 1 face(s) **Type:** Apply normal force **Value:** 2,500 N

Connector Definitions

No Data

Interaction Information

Interaction	Interaction Image	Interaction Properties
Global Interaction		**Type:** Bonded **Components:** 1 component(s) **Options:** Independent mesh

Mesh information

Mesh type	Mixed Mesh
Mesher Used:	Blended curvature-based mesh
Jacobian points for High quality mesh	16 Points
Jacobian check for shell	Off
Maximum element size	60.1101 mm
Minimum element size	60.1101 mm
Mesh Quality	High
Remesh failed parts independently	Off

Mesh information - Details

Total Nodes	18893
Total Elements	9230
Time to complete mesh(hh;mm;ss):	00:00:11
Computer name:	

Sensor Details

No Data

Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	975.833	4,893.1	0.000465393	4,989.46

Reaction Moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Free body forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	0.175323	1.24407	-0.000156403	1.25636

Free body moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Beams

Beam Forces

Beam Name	Joints	Axial(N)	Shear1(N)	Shear2(N)	Moment1(N.m)	Moment2(N.m)	Torque(N.m)
Beam-1(Trim/Extend1[5])	1	0.853549	-0.502709	-0.274549	0.0016527	-0.00643997	0.00760238
	2	-0.80298	0.374036	0.342845	0.0942514	-0.141949	-0.00313918
	3	25.4994	-11.4256	-8.33377	-1.92917	2.68111	-0.0503772
	4	-0.853549	0.502709	0.274549	0.0240549	-0.0406316	-0.00760238
Beam-2(Cut-Extrude2)	1	1.42755	0.439783	-0.0520676	-0.0115494	-0.090998	0.00512708
	2	-0.981374	0.214168	-0.0762117	0.0138425	0.0419888	0.00432488
	3	0.981372	-0.214177	0.0762145	0.0112285	0.0284657	-0.00432496
	4	5.29292	0.553961	-0.0264289	-0.0056559	-0.0995685	0.00280588
	5	4.66665	-0.591318	-0.02892	-0.00624214	0.101747	-0.000241669
Beam-3(Cut-Extrude4)	1	13.2231	-19.5742	-17.2302	-0.144947	-0.99609	-0.153585
	2	-24.1039	-29.1171	-15.8509	-0.204372	2.87337	-0.125462
	3	-29.5567	28.2909	16.7434	5.66417	-6.90994	-0.00884556
	4	-13.2231	19.5742	17.2302	6.53808	-6.26677	0.153588
	5	-7.31635	-20.7589	-19.9988	-1.04609	1.983	0.0800657
Beam-4(Trim/Extend1[1])	1	0.887915	0.197383	-0.190465	-0.00700991	-0.0167126	-0.00624274
	2	-0.881804	-0.181976	0.232051	0.0722039	0.103189	0.00292408
	3	11.1734	16.4278	-11.1082	-2.55647	-3.84703	0.0410809
	4	-0.887915	-0.197383	0.190465	0.0248442	0.0351947	0.00624274
Beam-5(Trim/Extend1[2])	1	-0.388532	3.68529	-0.0474402	0.015259	0.214376	-0.0219233
	2	0.388531	-3.68529	0.0474149	-0.000366528	0.943017	0.021924
	3	58.6223	2.57187	30.9904	10.0582	-0.211077	0.0746567
Beam-6(Trim/Extend1[4])	1	-0.116735	-3.86385	0.108677	-0.00245173	-0.255565	0.03229

	2	0.116735	3.86385	-0.108652	-0.031673	-0.957908	-0.0322907
	3	41.4015	10.7064	35.8967	12.093	-5.98272	-0.162536
Beam-7(Trim/Extend1[3])	1	1.13303	0.630394	0.150808	-0.0213466	0.0235627	0.00672371
	2	-1.13303	-0.630395	-0.150805	-0.0260148	0.174418	-0.00672382
	3	-51.1189	-23.7826	-35.0203	-11.9016	8.17924	-0.0494339
Beam-8(C channel 100 X 10(1))	1	217.409	172.251	1,406.17	78.3887	8.17993	-3.1012
	2	-92.9585	-264.482	968.954	-66.5385	-52.2156	-4.30238
	3	618.81	151.594	1,653.31	104.296	86.5031	-4.56661
	4	516.325	383.073	1,633.93	87.6584	96.0173	-4.07746
	5	876.879	67.5702	1,770.89	109.4	104.768	-3.63238
Beam-9(Angle iron 35 X 35 X 5(1)[1])	1	-1.24328	0.924844	-0.345825	0.0298528	0.0684206	0.00622445
	2	1.18315	-1.05352	0.405884	0.090387	0.186418	-0.00367301
	3	-45.8136	0.369991	1.49995	-0.032786	-0.703001	-0.0466692
	4	1.24328	-0.924844	0.345825	-0.0100884	-0.0155645	-0.00622445
Beam-10(Angle iron 35 X 35 X 5(1)[2])	1	-1.0641	-0.783988	-0.243607	0.0152934	-0.0444447	-0.00558203
	2	1.0519	0.799396	0.283832	0.0665292	-0.142502	0.00334879
	3	-40.6187	-6.69481	-2.16236	-0.892142	2.14097	0.0365038
	4	1.0641	0.783988	0.243607	-0.00241866	0.00301058	0.00558203
Beam-11(Cut-Extrude5[5])	1	-3,088.23	1,185.91	189.978	8.8883	57.9578	0.848069
	2	-2,718.25	121.619	-46.9107	-3.2043	117.502	0.45584
	3	-347.557	-127.64	19.8142	1.59998	23.0449	-0.122193
	4	-3,357.31	-223.302	-10.8059	0.656385	199.106	1.10368
	5	9.23858	51.6546	-2.83993	0.267826	2.452	0.0397765
	6	-1,394.91	-265.455	29.0132	3.08557	86.5706	0.0950098
Beam-12(C channel 100 X 10(1)[4])	1	1,597.23	328.887	-29.6848	-8.61781	100.115	0.197533
	2	-840.784	479.03	39.2579	-6.43425	24.9317	0.328466
	3	1,615.97	-322.447	-0.749349	-3.46018	208.062	-0.0992262
	4	845.094	507.202	10.0122	1.77278	-27.1652	0.526002
	5	840.784	-479.029	-39.2709	-6.81883	136.741	-0.328414
Beam-13(Cut-Extrude5[1])	1	-1,808	603.357	-269.313	-25.4937	18.7665	0.365092
	2	-3,023.09	1,127.25	83.8173	6.88674	113.356	-0.460023
	3	-86.744	-109.067	20.4151	1.95279	22.916	0.148337
	4	-332.275	-182.416	1.22102	-0.702295	30.2721	0.17713
	5	-61.5815	40.7926	18.3579	-1.93214	11.8435	0.0552368
	6	-3,126.71	-587.042	-4.80416	3.66111	161.354	-1.08642
Beam-14(Cut-Extrude5[3])	1	-1,697.76	428.457	-9.65781	-1.25765	15.3272	-0.0307331
	2	-2,093.33	60.1163	-1.73386	-0.803989	126.291	-0.0342428
	3	-319.079	-95.3882	-0.136062	-0.119598	35.3622	0.00716019

	4	-2,059.45	-123.082	-0.233919	-0.325399	163.535	-0.0228078
	5	319.079	95.3883	0.136046	0.0504288	13.1308	-0.00715996
	6	-1,220.63	-180.595	-2.31662	-0.853013	115.049	-0.000926873
Beam-15(C channel 100 X 10(1)[1])	1	-257.718	-40.0406	11.5497	1.48115	-5.25105	-0.0282917
	2	44.3082	-59.6326	-4.5322	0.468347	-13.3371	0.0424124
	3	-236.299	59.4438	-9.10887	-1.77829	-18.6507	0.0219466
	4	-78.8268	-61.8365	-2.6756	0.0429688	7.91489	0.0258613
	5	-44.3082	59.6326	4.5322	1.06127	-6.78883	-0.0424123
Beam-16(Cut-Extrude2[6])	1	2.43185	-27.7918	37.0859	-5.71901	-7.27259	0.0111882
	2	-2.43185	27.7918	-37.0859	-5.40675	-1.06495	-0.0111882
Beam-17(Cut-Extrude2[8])	1	30.63	419.101	37.6388	5.87772	-49.1925	0.0113192
	2	-30.6302	-419.101	-37.6388	4.83733	-70.1176	-0.0113196
Beam-18(Cut-Extrude2[9])	1	-516.753	-925.525	-27.4377	5.17407	-101.679	-0.106393
	2	516.753	925.525	27.4377	-0.55121	-54.2586	0.106393
Beam-19(Cut-Extrude2[5])	1	-54.3133	-22.841	59.0475	-9.23163	-5.27192	-0.019885
	2	54.3133	22.8408	-59.0475	-8.48262	-1.58034	0.0198859
Beam-20(Cut-Extrude2[10])	1	3,207.47	1,723.46	1,540.44	-49.305	-230.838	-0.0276896
	2	-3,207.47	-1,723.46	-1,540.44	-108.942	407.886	0.0276896
Beam-21(C channel 100 X 10(1)[3])	1	1,314.47	288.76	13.8178	-1.42762	133.282	-0.112429
	2	412.854	1,219.3	146.888	-29.1984	233.392	-1.07633
	3	1,225.51	-390.356	-19.198	-7.56351	233.393	0.169097
	4	-134.364	1,099.03	105.848	17.8002	-168.446	-0.961901
	5	-412.854	-1,219.31	-146.859	-20.372	178.122	1.07647
Beam-22(Cut-Extrude2[11])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-23(Cut-Extrude5[2])	1	-1,989.5	519.828	87.8457	8.30036	36.2745	-0.161062
	2	-3,088.81	1,151.27	-73.5784	-7.97563	115.4	0.495468
	3	-3.13058	-77.7688	-19.2427	-1.64372	16.3257	-0.19332
	4	-54.8703	5.01647	-25.77	2.67299	5.4111	-0.0134899
	5	-3,542.06	-989.098	-3.47191	-0.955901	233.78	1.08874
	6	-256.708	-122.106	-9.76197	-1.06895	11.8861	-0.173515
Beam-24(Cut-Extrude2[7])	1	-231.109	-36.3518	66.7041	-9.1247	-6.86491	-0.00879654
	2	231.109	36.3518	-66.7041	-10.8865	-4.04064	0.00879612
Beam-25(Sb beam 100 X 8(1)[4])	1	99.0144	-20.5244	-4.70847	-0.346408	1.59954	0.0103188
	2	-68.3402	14.1371	5.46498	-0.749175	4.86673	0.0534768
	3	78.3774	-8.39598	3.60174	0.864772	3.0924	-0.0163565
	4	17.6205	-9.33227	5.42143	1.17861	2.42554	0.0435284
	5	68.3402	-14.1371	-5.46498	-0.958632	-0.448886	-0.0534768
Beam-26(Cut-Extrude2[12])	1	13.0556	259.672	0.64592	-0.825588	-30.8281	0.0138462
	2	-13.0557	-259.672	-0.64592	1.00947	-43.097	-0.0138456
Beam-27(Cut-Extrude2[13])	1	-736.244	-667.904	-184.018	14.2416	-63.4325	-0.00355881
	2	736.244	667.904	184.018	16.7636	-49.1031	0.00355881

Beam-28(Cut-Extrude5[4])	1	-2,855.29	538.837	40.9382	4.54623	65.2534	0.236816
	2	-2,579.75	12.6203	46.1855	2.93696	143.866	-0.790352
	3	-323.512	-120.812	-20.8707	-1.61182	21.9593	0.0932559
	4	-3,134.5	-535.332	43.0795	0.927563	239.391	-1.26744
	5	1.12869	30.3703	-18.7115	0.613524	1.22807	-0.0869893
	6	-1,257.43	-230.782	-29.1587	-2.84627	76.8245	-0.0515964
Beam-29(Cut-Extrude2[14])	1	-3,265.3	-1,687.42	1,203.72	117.947	407.484	-0.194715
	2	3,265.3	1,687.42	-1,203.72	66.4286	-149.02	0.194715
Beam-30(Cut-Extrude2[15])	1	-1.71859e-11	-2.06791e-11	-9.00436e-14	3.05586e-15	-5.54296e-13	-4.86529e-17
	2	1.48906e-12	3.15029e-12	1.29232e-13	-6.17431e-16	8.38784e-14	8.37265e-17
Beam-31(Cut-Extrude5[6])	1	-1,625.09	196.066	-167.44	-9.38323	22.27	-0.15993
	2	-1,822.16	24.6951	-30.5374	-2.00031	134.24	-0.0830688
	3	-909.013	-198.977	-13.7671	-1.11789	35.1876	-0.0115118
	4	-2,479.2	-143.889	-10.6641	-0.307514	159.651	-0.319195
	5	-185.346	108.158	7.2814	-0.568958	5.74957	0.0434366
	6	-2,047.19	-218.178	9.29378	-0.162063	111.3	0.0490068
Beam-32(C channel 100 X 10(1)[2])	1	-190.261	170.532	30.0888	3.56831	-8.76842	-0.230652
	2	103.016	-35.7634	9.46632	-0.844215	-9.0266	-0.321083
	3	-148.519	-142.478	-26.3933	-5.09048	46.4365	0.261393
	4	-224.708	25.576	33.0011	6.48761	-16.0194	-0.40268
	5	-103.016	35.7634	-9.46635	-2.35067	-3.04353	0.32108

Beam Stresses

Beam Name	Joints	Axial(N/m^2)	Bending Dir1(N/m^2)	Bending Dir2(N/m^2)	Torsional (N/m^2)	Upper bound axial and bending(N/m^2)
Beam-1(Trim/Extend1[5])	1	-2,670.39	2,396.05	-6,199.64	-85,630.6	11,266.1
	2	-2,512.18	12,686.1	98,329.4	-35,358.7	113,528
	3	79,776.7	-408,362	-1.75849e+06	-567,431	2.24663e+06
	4	-2,670.39	319.531	30,083.4	-85,630.6	33,073.4
Beam-2(Cut-Extrude2)	1	16,499.9	-594,820	635,244	451,575	1.24656e+06
	2	11,342.9	-569,728	425,632	-380,920	1.0067e+06
	3	11,342.8	450,199	-317,257	-380,927	778,798
	4	61,176.4	-408,713	586,406	247,132	1.05629e+06
	5	53,937.7	708.494	-412,110	-21,285.4	466,757
Beam-3(Cut-Extrude4)	1	-18,482.2	194,551	-221,587	1.2151e+06	434,620
	2	-33,690.4	319,968	-524,364	-992,609	878,022

	3	-41,311.8	1.23516e+06	306,755	-69,982.7	1.58323e+06
	4	-18,482.2	1.66319e+06	19,725.1	1.21513e+06	1.7014e+06
	5	-10,226.2	-129,924	-194,918	633,449	335,068
Beam-4(Trim/Extend1[1])	1	-2,777.9	-3,135.92	-14,285.6	70,340.4	20,199.5
	2	-2,758.78	13,400.6	-69,034.7	32,947.2	85,194.1
	3	34,956.8	-346,222	2.66345e+06	462,881	3.04463e+06
	4	-2,777.9	4,816.95	-23,401.6	70,340.4	30,996.5
Beam-5(Trim/Extend1[2])	1	453.747	-26,713.2	41,971.2	147,331	69,138.1
	2	453.746	104,829	-177,119	147,336	282,403
	3	68,462	1.86611e+06	-1.07919e+06	501,716	3.01377e+06
Beam-6(Trim/Extend1[4])	1	136.329	28,888.8	-48,284.5	-216,999	77,309.7
	2	136.329	-112,505	183,481	-217,003	296,122
	3	48,350.7	1.60636e+06	-221,241	-1.09229e+06	1.87595e+06
Beam-7(Trim/Extend1[3])	1	-1,323.21	1,389.25	2,052.09	-45,185.4	4,764.55
	2	-1,323.21	14,514.4	-29,873.3	-45,186.1	45,710.9
	3	-59,699.2	-1.32606e+06	-212,703	-332,211	1.59846e+06
Beam-8(C channel 100 X 10(1))	1	165,939	9.9669e+06	-204,567	-9.23051e+06	1.03374e+07
	2	70,951.2	8.46018e+06	-1.30583e+06	1.28057e+07	9.83695e+06
	3	472,311	1.32609e+07	-2.1633e+06	-1.35922e+07	1.58966e+07
	4	394,088	1.11455e+07	-2.40123e+06	-1.21363e+07	1.39408e+07
	5	669,283	1.39099e+07	-2.62008e+06	-1.08115e+07	1.71992e+07
Beam-9(Angle iron 35 X 35 X 5(1)[1])	1	3,889.68	11,530.4	57,719.3	-70,103.9	73,139.3
	2	3,701.58	-21,163.2	-151,263	-41,367.9	176,127
	3	-143,331	428,784	774,607	-525,620	1.34672e+06
	4	3,889.68	-1,112.26	10,944.7	-70,103.9	15,946.7
Beam-10(Angle iron 35 X 35 X 5(1)[2])	1	3,329.13	12,132.4	-40,209.6	62,868.5	55,671.1
	2	3,290.96	-19,082.9	117,329	37,716.3	139,702
	3	-127,078	408,367	-1.83394e+06	411,130	2.36939e+06
	4	3,329.13	-744.478	-1,807.29	62,868.5	5,880.89
Beam-11(Cut-Extrude5[5])	1	-2.83316e+06	1.84119e+06	-1.65827e+06	2.59734e+06	6.33262e+06
	2	-2.49373e+06	-663,761	-3.36194e+06	1.39608e+06	6.51943e+06
	3	-318,851	331,432	-659,353	-374,235	1.30964e+06
	4	-3.08002e+06	135,968	-5.69675e+06	3.38018e+06	8.91274e+06

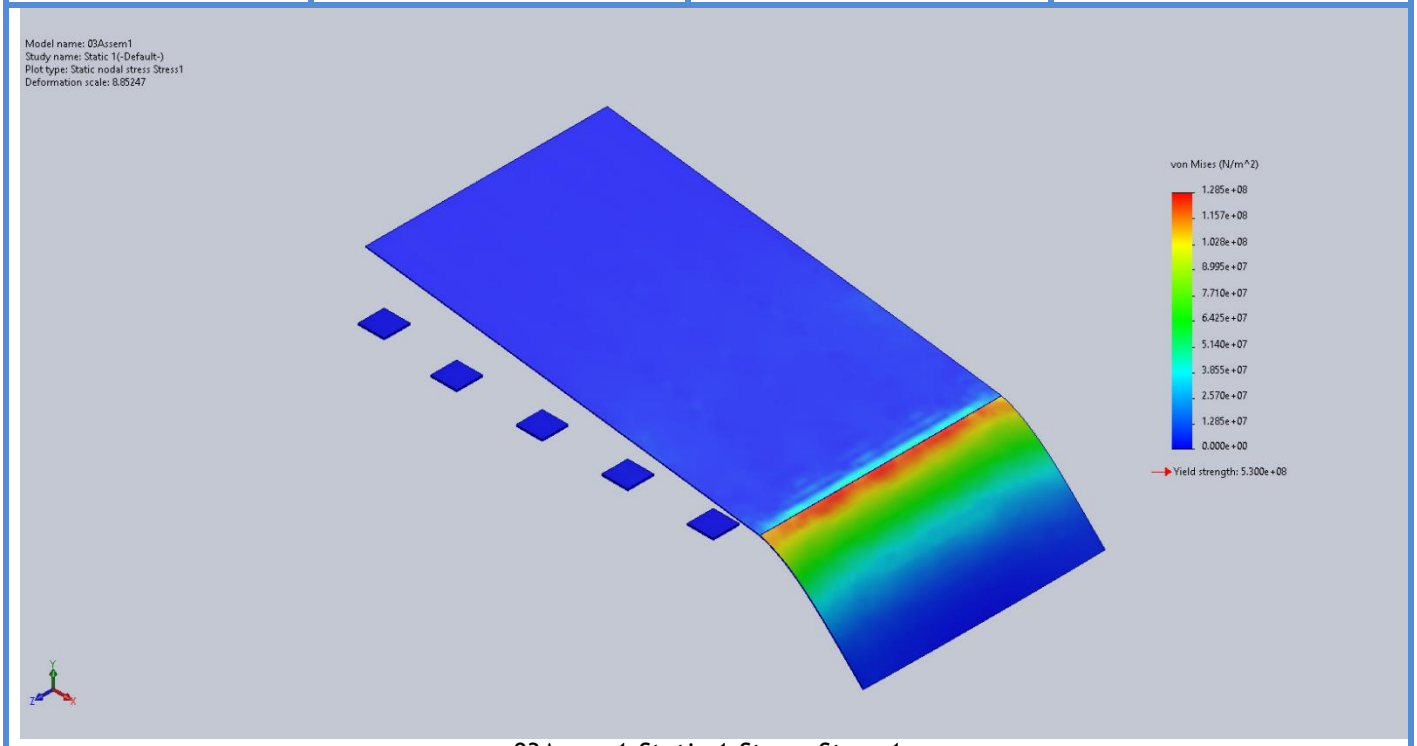
	5	-8,475.52	-55,479.3	70,155.9	-121,821	134,111
	6	-1.2797e+06	639,166	-2.47693e+06	290,982	4.39579e+06
Beam-12(C channel 100 X 10(1)[4])	1	1.2191e+06	-1.09573e+06	-2.50371e+06	589,708	4.81853e+06
	2	641,733	818,098	623,499	-980,590	2.08333e+06
	3	1.2334e+06	-439,951	-5.20327e+06	-296,226	6.87662e+06
	4	645,023	225,404	679,354	1.57031e+06	1.54978e+06
	5	641,733	-866,996	-3.41965e+06	-980,434	4.92838e+06
Beam-13(Cut-Extrude5[1])	1	-1.65867e+06	-5.28096e+06	-536,941	1.11815e+06	7.47657e+06
	2	-2.7734e+06	1.42657e+06	-3.2433e+06	-1.40889e+06	7.44327e+06
	3	-79,579.4	404,514	-655,666	454,304	1.13976e+06
	4	-304,831	-145,478	-866,134	542,487	1.31644e+06
	5	56,495.2	400,238	338,861	-169,171	795,594
	6	-2.86846e+06	758,388	-4.61661e+06	-3.32731e+06	8.24345e+06
Beam-14(Cut-Extrude5[3])	1	-1.55754e+06	-260,519	-438,536	-94,190.7	2.25659e+06
	2	-1.92044e+06	-166,544	-3.61339e+06	-104,947	5.70037e+06
	3	-292,724	-24,774.3	-1.01177e+06	21,944.6	1.32927e+06
	4	-1.88935e+06	-67,405.6	-4.67901e+06	-69,901.3	6.63577e+06
	5	-292,724	-10,446.2	375,694	21,943.9	678,864
	6	-1.11982e+06	-176,699	-3.29175e+06	-2,840.68	4.58827e+06
Beam-15(C channel 100 X 10(1)[1])	1	-196,705	188,324	131,320	-84,458.7	516,349
	2	-33,818.5	-59,549	-333,539	-126,613	426,906
	3	-180,357	-226,105	466,422	65,516.9	872,884
	4	-60,165	5,463.44	-197,938	77,203.3	263,566
	5	-33,818.5	134,938	169,777	-126,613	338,533
Beam-16(Cut-Extrude2[6])	1	-2,230.99	1.18468e+06	-208,081	-34,277.5	1.39499e+06
	2	-2,230.99	-1.11999e+06	30,470	-34,277.5	1.15269e+06
Beam-17(Cut-Extrude2[8])	1	28,100.1	1.21755e+06	1.40748e+06	34,679	2.65313e+06
	2	28,100.3	-1.00204e+06	-2.00618e+06	34,680	3.03632e+06
Beam-18(Cut-Extrude2[9])	1	474,072	-1.07179e+06	-2.90921e+06	325,959	4.45507e+06
	2	474,072	-114,182	1.55243e+06	325,959	2.14068e+06
Beam-19(Cut-Extrude2[5])	1	49,827.3	1.91231e+06	-150,838	60,922.3	2.11297e+06
	2	49,827.3	-1.75715e+06	45,216.2	60,925	1.85219e+06
Beam-20(Cut-Extrude2[10])	1	-2.94255e+06	1.02134e+07	-6.60465e+06	84,833.3	1.97606e+07
	2	-2.94255e+06	-2.25671e+07	-1.16703e+07	84,833.3	3.71799e+07
Beam-21(C channel 100 X 10(1)[3])	1	1.00328e+06	-181,516	-3.33317e+06	-335,640	4.51796e+06
	2	-315,113	3.7125e+06	5.83674e+06	3.21323e+06	9.86436e+06
	3	935,377	-961,678	-5.83677e+06	504,815	7.73383e+06
	4	-102,554	2.26325e+06	4.21256e+06	-2.87162e+06	6.57836e+06

	5	-315,113	-2.59024e+06	-4.45453e+06	3.21365e+06	7.35989e+06
Beam-22(Cut-Extrude2[11])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-23(Cut-Extrude5[2])	1	-1.82518e+06	1.7194e+06	-1.03787e+06	-493,275	4.58245e+06
	2	-2.83369e+06	-1.65213e+06	-3.3018e+06	1.51744e+06	7.78761e+06
	3	-2,872.01	-340,492	-467,106	-592,070	810,469
	4	50,338.3	-553,702	154,821	41,314.8	758,860
	5	-3.24951e+06	-198,012	-6.68882e+06	3.33442e+06	1.01363e+07
	6	-235,505	-221,430	-340,080	-531,415	797,015
Beam-24(Cut-Extrude2[7])	1	212,020	1.89016e+06	-196,416	26,950.2	2.29859e+06
	2	212,020	-2.25511e+06	115,609	26,948.9	2.58274e+06
Beam-25(Sb beam 100 X 8(1)[4])	1	90,836.3	-71,757.3	-45,765.4	31,606.7	208,359
	2	62,695.7	155,190	139,245	-163,801	357,130
	3	71,903.8	179,135	-88,478.8	-50,100.4	339,518
	4	16,165.1	244,145	-69,398.7	133,329	329,709
	5	62,695.7	-198,578	12,843.4	-163,801	274,117
Beam-26(Cut-Extrude2[12])	1	11,977.2	-171,018	882,043	42,420.9	1.06504e+06
	2	11,977.4	-209,109	-1.23308e+06	42,419.1	1.45416e+06
Beam-27(Cut-Extrude2[13])	1	675,434	-2.95011e+06	-1.81491e+06	10,903.2	5.44046e+06
	2	675,434	3.47254e+06	1.40492e+06	10,903.2	5.5529e+06
Beam-28(Cut-Extrude5[4])	1	-2.61946e+06	941,738	-1.86701e+06	725,283	5.4282e+06
	2	-2.36668e+06	608,382	-4.11624e+06	-2.42057e+06	7.09131e+06
	3	-296,792	-333,884	-628,291	285,610	1.25897e+06
	4	-2.87561e+06	192,142	-6.84936e+06	-3.88173e+06	9.91711e+06
	5	-1,035.47	-127,090	35,137	266,417	163,262
	6	-1.15357e+06	-589,596	-2.19808e+06	-158,022	3.94124e+06
Beam-29(Cut-Extrude2[14])	1	-2.9956e+06	2.44324e+07	-1.16588e+07	-596,554	3.90868e+07
	2	-2.9956e+06	-1.37605e+07	-4.2637e+06	-596,554	2.10198e+07
Beam-30(Cut-Extrude2[15])	1	1.03284e-07	-2.44869e-08	-5.40542e-07	8.72444e-10	6.68313e-07
	2	-8.94899e-09	4.94754e-09	8.17971e-08	-1.50138e-09	9.56936e-08
Beam-31(Cut-Extrude5[6])	1	-1.49087e+06	-1.94371e+06	-637,180	-489,810	4.07176e+06
	2	-1.67166e+06	-414,358	-3.84084e+06	-254,410	5.92686e+06
	3	-833,933	-231,567	-1.00678e+06	-35,256.4	2.07228e+06
	4	-2.27443e+06	-63,700.7	-4.56788e+06	-977,582	6.90601e+06
	5	170,038	117,858	164,505	-133,031	452,400
	6	-1.8781e+06	-33,570.8	-3.18449e+06	150,091	5.09616e+06
Beam-32(C channel 100 X 10(1)[2])	1	-145,218	453,701	219,283	-688,561	818,203
	2	-78,627.7	107,340	-225,740	958,523	411,707
	3	-113,358	-647,240	-1.1613e+06	780,333	1.9219e+06

	4	-171,510	824,883	400,618	-1.20211e+06	1.39701e+06
	5	-78,627.7	-298,882	76,113.6	958,516	453,623

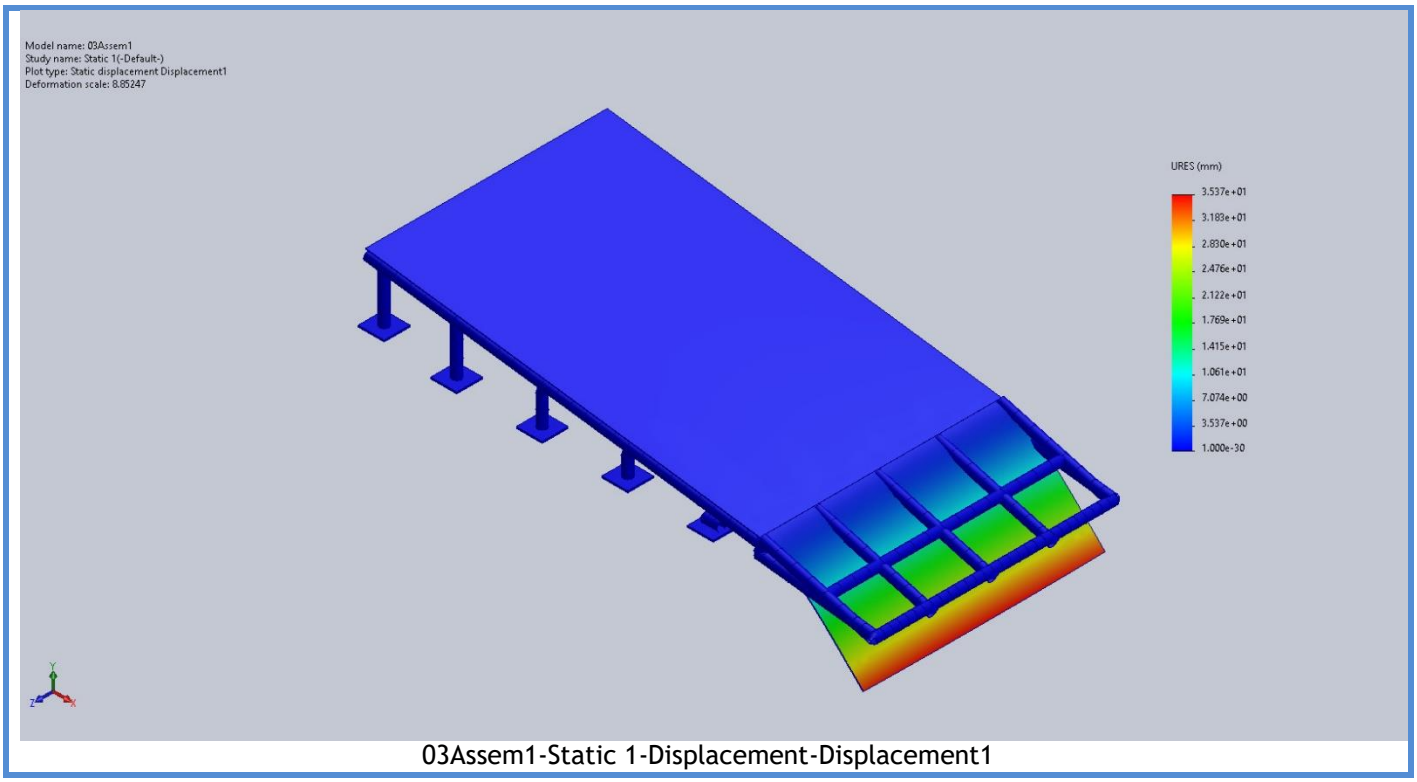
Study Results

Name	Type	Min	Max
Stress1	VON: von Mises Stress	0.000e+00N/m^2 Node: 17610	1.285e+08N/m^2 Node: 14651



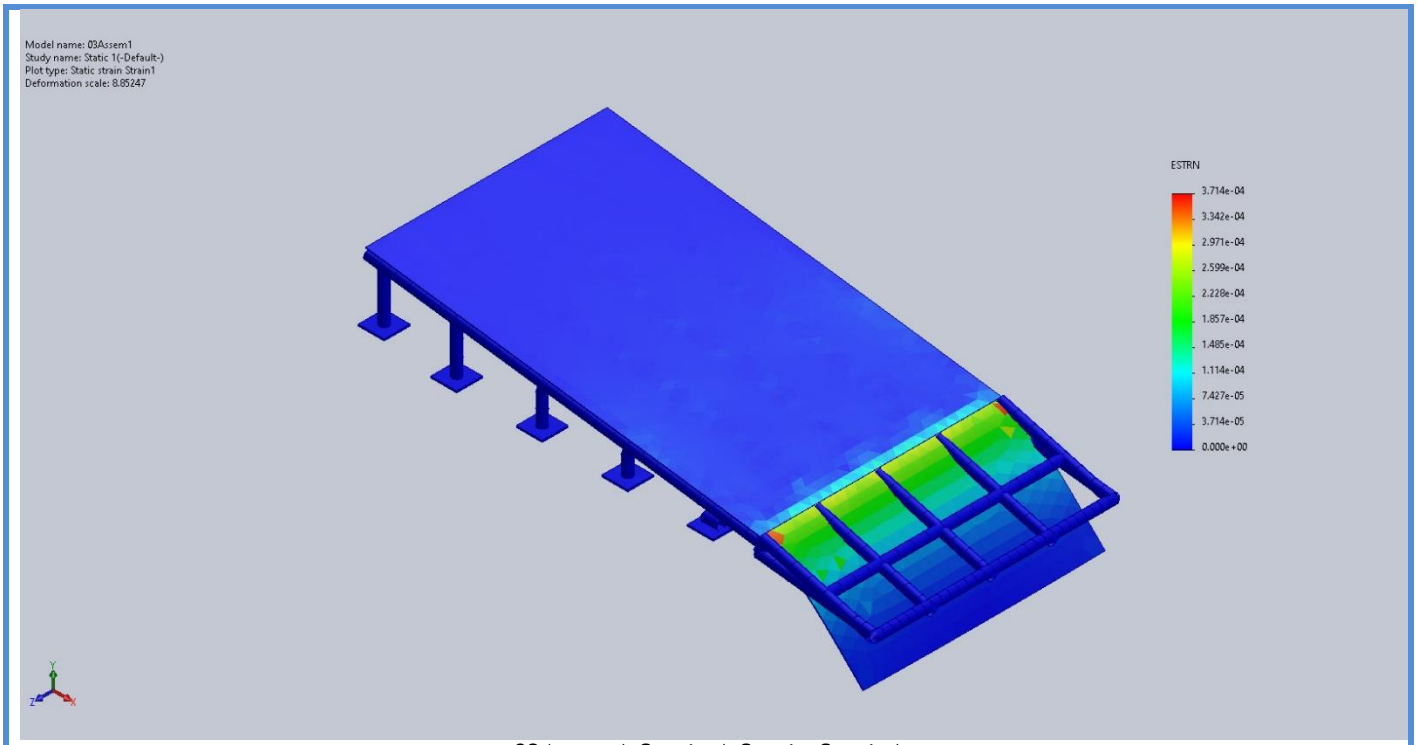
03Assem1-Static 1-Stress-Stress1

Name	Type	Min	Max
Displacement1	URES: Resultant Displacement	0.000e+00mm Node: 16450	3.537e+01mm Node: 14156



03Assem1-Static 1-Displacement-Displacement1

Name	Type	Min	Max
Strain1	ESTRN: Equivalent Strain	0.000e+00 Element: 8446	3.714e-04 Element: 6297



03Assem1-Static 1-Strain-Strain1

Conclusion