
A-1 FENCE PRODUCTS COMPANY PVT LTD

NIHVA

Nihva Technology Pvt Ltd

UNICO Machine Guard Fence

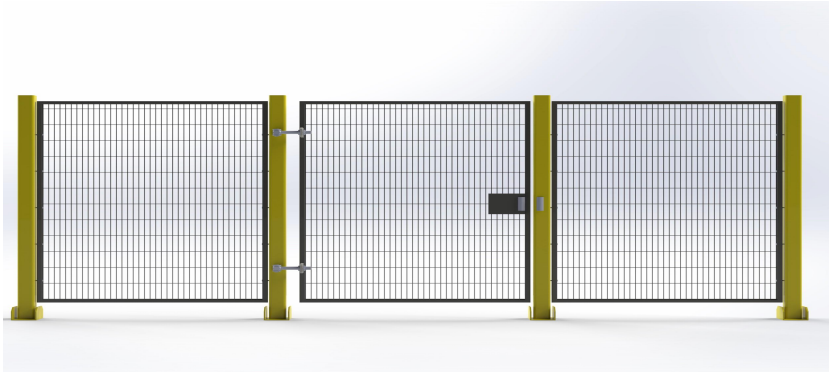

Date - 24/05/2022

To,
Mr Prasad J Deshmukh
Purchase Executive

Project : Machine Guard Fence

Subject Attn. Offer of Fencing for Machine Guarding, Supply of A-1 Fence Products.

Dear Sir,

With reference to your subject requirement, we are pleased to enclose our offer for your perusal. Our offer has been divided into the following parts for easy appraisal:

A. Cover Letter
B. Technical specifications
C. Prices for (**UNICO** Machine Guard Fence)
D. Warranty Statement for Unico Products

We hope that you find the offer in line with your requirement and shall favour us with your valued order. If you need any clarifications, please feel free to call the undersigned and we shall respond immediately.


Thanking you and assuring you of our best services at all times.

A-1 FENCE
Fence & Fence-ability

BEAUTIFYING SPACES
PROTECTING ASSETS


MACHINE GUARD SYSTEM

Enhance the safety and efficiency of your industry.

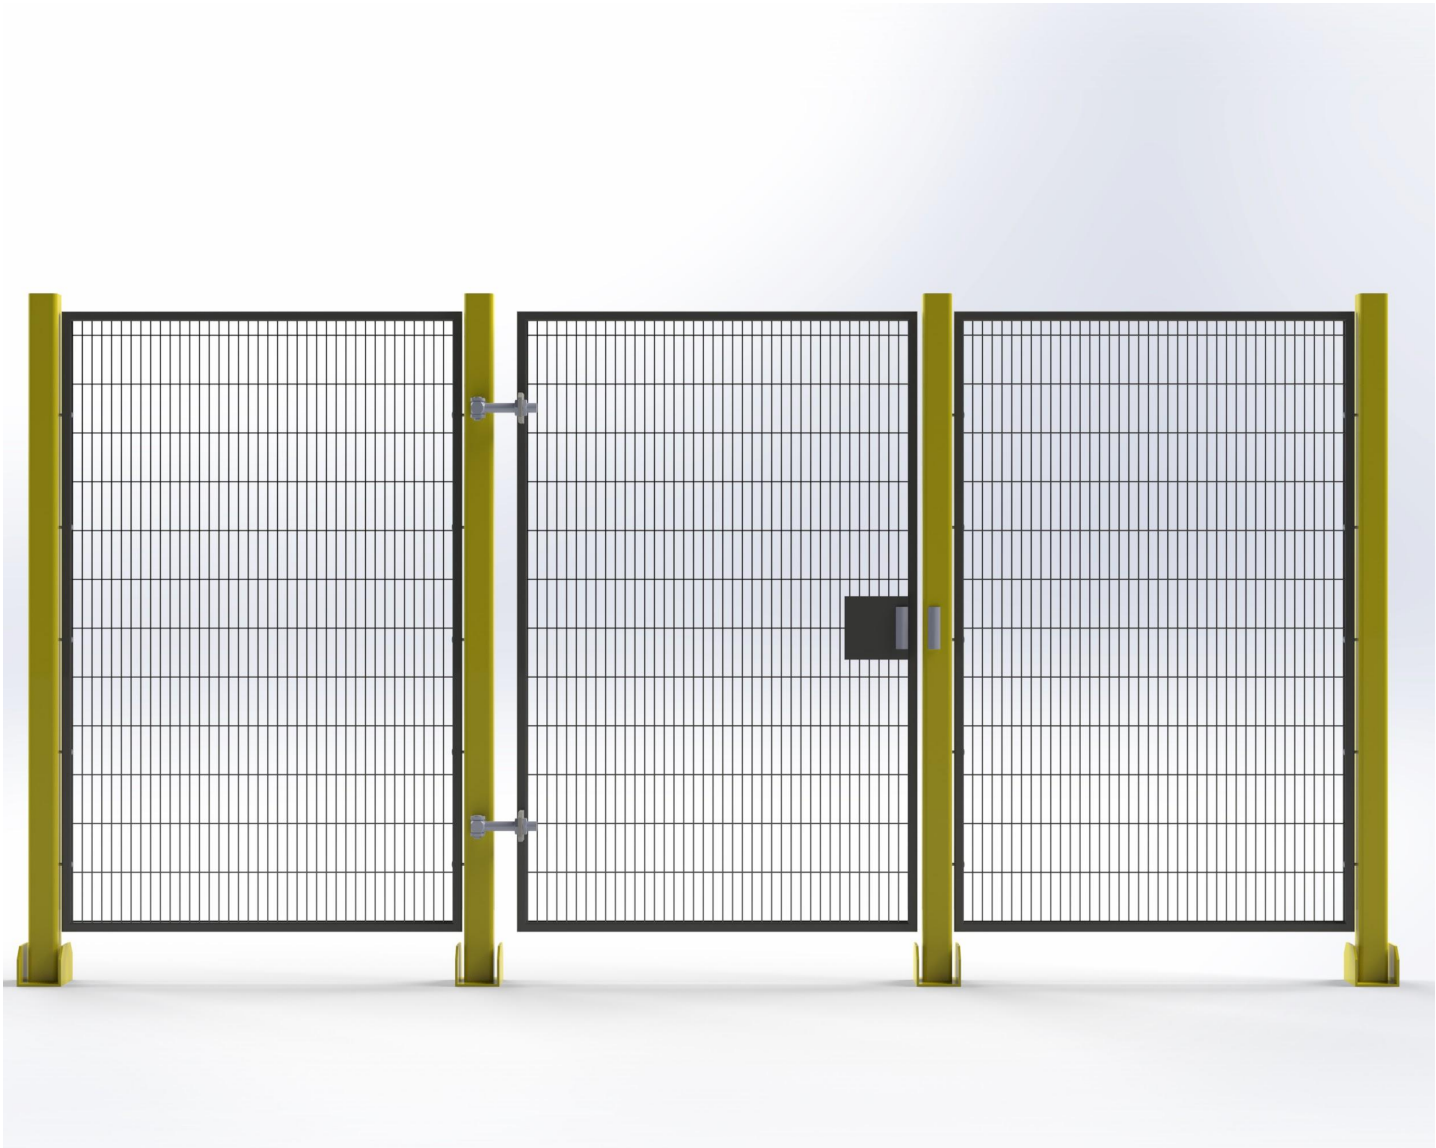

The safety of your machine guarding has various dimensions. Our top-of-the-line items, such as the robust mesh panels and the quick-release system, are A1. The Safe Lock mechanism and Rapid Fix system have been installed, together with other sorts of safety switches, and the entire system is meant to keep your machine guarding secure and smooth.

PANEL

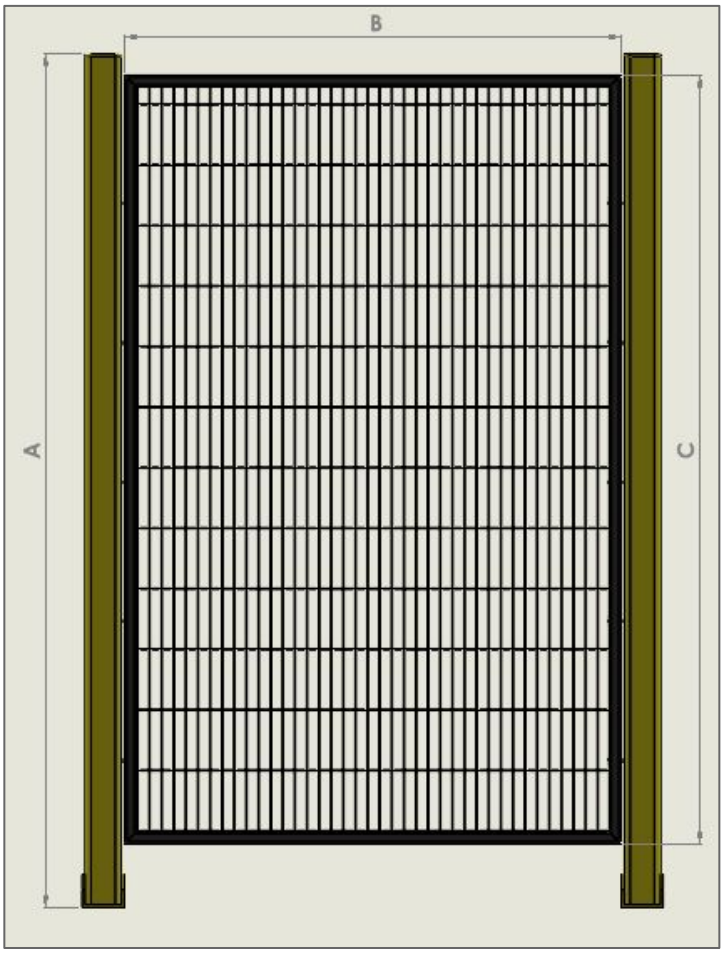

WELDMESH PANELS

Mesh size 20 x 100 mm (as per IS-13857)

3 mm Pre-galvanised (40gsm) wire

Welded into a 20x20x2 mm frame


Complete Panel powder-coated to Grey - (RAL 7016)

Panels are available in
Standard widths : 200, 1200 and 1500mm
Standard System Height : 1400 & 1800mm



Sr. No	System Height (A)	Panel Width (B)	Panel Height (C)	Price
1	1800	1500	1600	6234
2	1800	1200	1600	5650
3	1800	200	1600	1400

POST

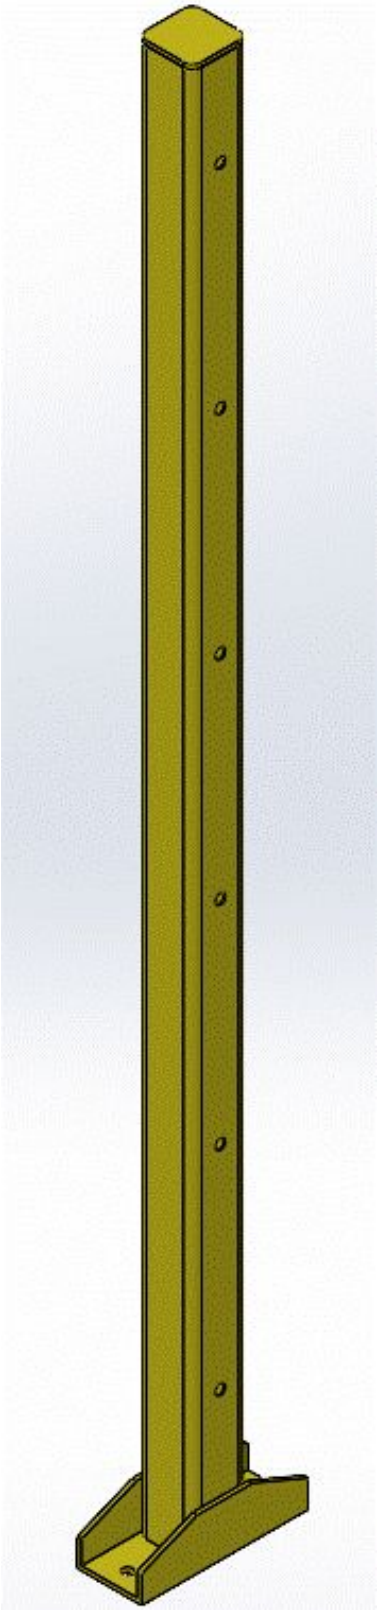


POST IN STEEL

The Strong Fix system is ideal for use in heavy industrial applications where there is a high risk of impact. Based on heavy 60x60x1.6 mm pre-galvanized with minimum 90 gsm posts and a sturdy wedge shaped base-plate that is built with toe-guarding and other safeguarding purposes in mind.

The post is powder coated based on OSHA Standard Yellow (RAL 1021) with Min 60 microns.

Sr.No	Product	Height (mm)	Price (INR)
1	Standard Post	1800	3300
2	Corner Post	1800	3630

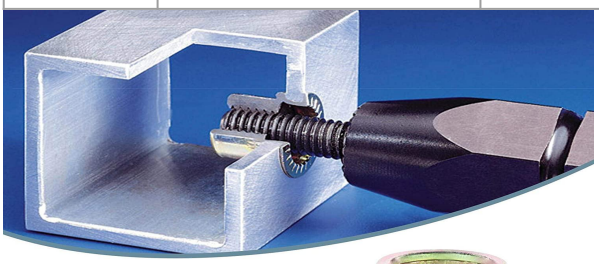


EASY
OPERATION

Our rivet nuts can be firmly attached to the flat surface without need for welding or tapping.



Rivet nuts are easy-to-install, reliable fasteners that can provide strong load-bearing capacity.

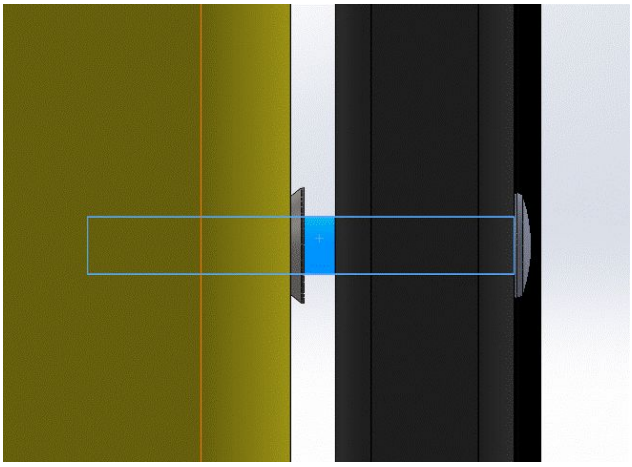

LOCKS AND ACCESSORIES

Option 1




The mechanism is made of 100 percent stainless steel. The stainless steel adjustable self-latching bolt and hook, in combination with the right keep, ensure a sturdy and secure closed gate that cannot be torn apart or pushed open.The lock mechanism has been improved. Changing the self-latching day bolt to the left or right is simple, and the daybolt can be adjusted continuously up to 10 mm without disassembling the lock box. A protective plate has also been included to prevent dirt penetration.

Locks & magnetic contacts	10,800 (INR)



Our mesh, sheet metal panels are used to form the door, which is made up of panels, supports, and fixings. The hinged doors can be delivered fully assembled with your preferred lock solution for fast installation on site.
Locks are customised to your level of security. Magnetic locks, Euro cylinder locks, and other Safe Lock and Safe Escape Lock are all options that can be equipped with a range of safety switches.



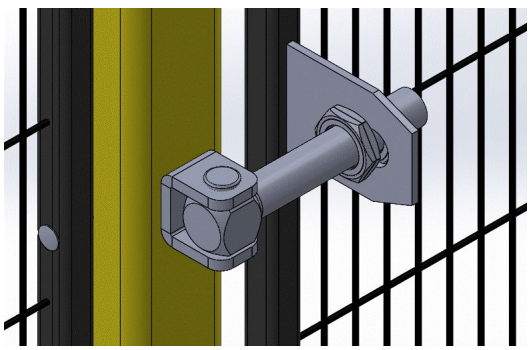

The easy-to-install German steel adjustable hinges allow you to regulate the spacing between the gate post and the frame while also ensuring reliability.

LOCKS AND ACCESSORIES

Interlock Plug
Option 2



Safety device mounted on safety doors or machine tools to prevent accidents due to unintentional power input.

· Positive opening mechanism. Safe structure that allows for visual confirmation that a part of a circuit has been removed.

· Simple and reliable operation that involves simple inserting and removing the plug. Machinery can be stopped in an emergency by immediately removing the plug.

· Simple structure. A product that pursues high reliability and has removed complicated contacts and operation mechanisms from it as much as possible.

· Sufficient dimensions required for door interlocking while also being convenient to carry around and not easily lost.



· Ideal for safety fence doors, doors and operation panels of machine tools and industrial machinery, etc.

· Ideal for self-propelled machines, passageway doors and operation panels in automated warehouses as well as other general mechanical equipment..

SPT 11	9500 INR

LOCKS AND ACCESSORIES

Schmersal Safety door Monitoring
Option 3



There are door handle actuators available for the various series of safety switches and solenoid interlocks, either integrated or as a separate component. This allows the safety, actuation function and, where applicable, the release button to be combined into one ergonomic unit.

Safety Lock System	40000 INR


Locking system Summary -

Option 1	Locinox + Door Contacts	10800 INR
Option 2	Interlock plug	9500 INR
Option 3	Schmersal Safety door Monitoring	40000 INR

Relevant Standards

ISO 13857

Reaching over protective system.

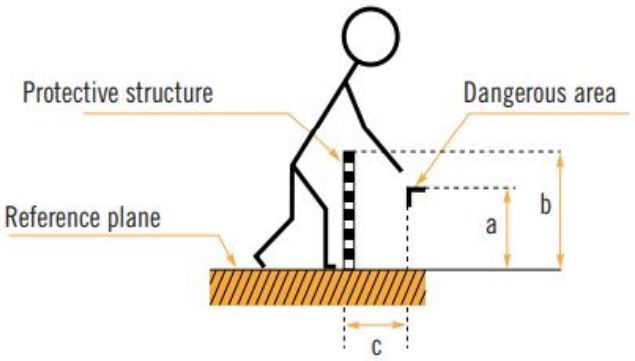


a: height of hazard zone
b: height of protective structure
c: horizontal distance to hazard zone

Height of dangerous zone **a**	Height of the protection structure **b**									
	1000	1200	1400	1600	1800	2000	2200	2400	2500	2700
	Horizontal distance of the dangerous area **c**									
2700	-	-	-	-	-	-	-	-	-	-
2600	900	800	700	600	600	500	400	300	100	-
2400	1100	1000	900	800	700	600	400	300	100	-
2200	1300	1200	1000	900	800	600	400	300	-	-
2000	1400	1300	1100	900	800	600	400	-	-	-
1800	1500	1400	1100	900	800	600	-	-	-	-
1600	1500	1400	1100	900	800	500	-	-	-	-
1400	1500	1400	1100	900	800	-	-	-	-	-
1200	1500	1400	1100	900	700	-	-	-	-	-
1000	1500	1400	1000	800	-	-	-	-	-	-
800	1500	1300	900	600	-	-	-	-	-	-
600	1400	1300	800	-	-	-	-	-	-	-
400	1400	1200	400	-	-	-	-	-	-	-
200	1200	900	-	-	-	-	-	-	-	-
0	1100	500	-	-	-	-	-	-	-	-

ISO 14120

General requirements for the design and construction of fixed and movable guards.

A1 Fence has always been a top notch designer and manufacturer of well engineered gates. As far as machine guard gates are concerned, we have left no stone unturned, initially tested virtually using CAE softwares and then physically enduring impacting energy of 2000 Joules complying with all applicable International Standards is a strong mesh panel strengthened by a robust frame.

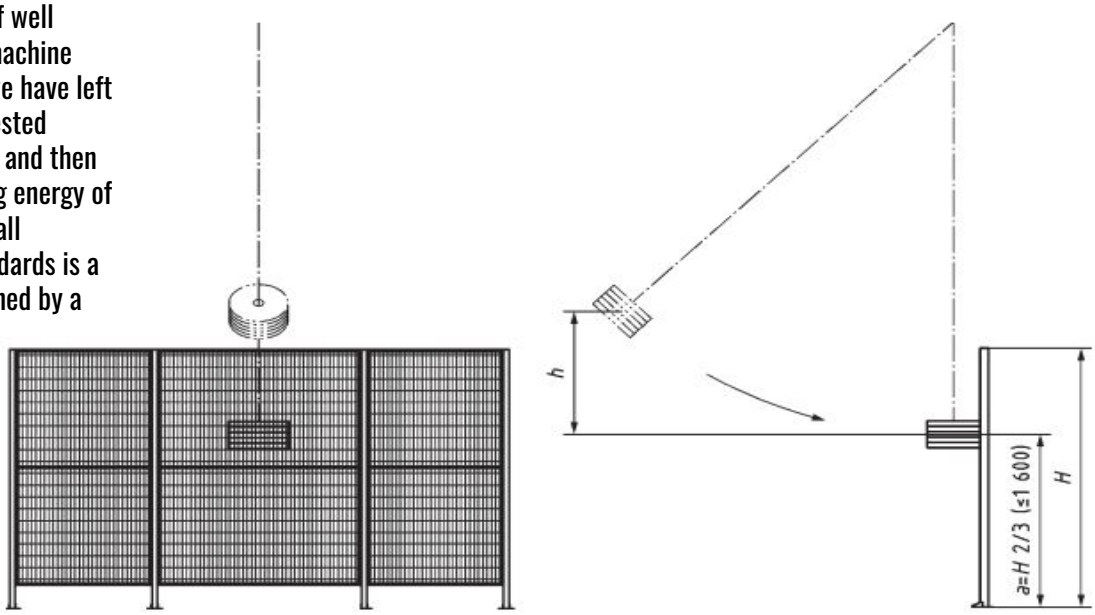

Key

H guard height
h falling down height
a height of point of impact, which shall not be higher than 1 600 mm

SR NO	ITEM	QTY	UOM	Price	Total Price
1	***Panel*** System Height - 1800mm Panel Width - 1500mm Panel height - 1600mm SHS Tube - 20x20x2mm THK Horizontal Braces - 1 Nos (20x20x2mm THK) Weldmesh - 20x100mm THK PPC Grey min 60 microns 10 Nos M8 N&B	58	NOS	₹6,234	₹361,572
2	System Height - 1800mm Panel Width - 1200mm Panel height - 1600mm SHS Tube - 20x20x2mm THK Horizontal Braces - 1 Nos (20x20x2mm THK) Weldmesh - 20x100mm THK PPC Grey min 60 microns 10 Nos M8 N&B	11	NOS	₹5,650	₹62,150
3	***Post*** Post Height - 1800 Base Plate Wedge Shape 5mm Anchor fasteners M10x150mm PPC Yellow min 60 microns 10 Nos M8 N&B	70	NOS	₹3,300	₹231,000
4	***Gate*** System Height - 1800 Gate Height - 1600 mm Gate width - 1200 mm Adjustable Hinges	1	NOS	₹10,500	₹10,500
5.a	Locinox Lock + Magnetic contact (Option 1)	1	NOS	10800	10,800
5.b	Interlock Plug - SPT 11 (Option 2)	1	NOS	9500	9,500
5.c	Schmersal Safety door monitoring (Option 3)	1	NOS	40000	40,000

Terms & Conditions

- **TAXES & DUTIES FOR SUPPLY & SERVICE**
  All ex-works prices quoted are exclusive of taxes, insurance & transportation and are payable at actual at rates ruling at the time of delivery. IGST @ 18% applicable on supplies, services, transportation.

- **ORDER PLACEMENT**
  A-1 Fence Products Pvt Ltd

- **PAYMENT TERMS FOR SUPPLY & Installation**
  - 50% Advance Along with confirmed Purchase Order.
  - 50% Prior to dispatch against material readiness and Proforma Invoice.

- **DISPATCH TERMS FOR SUPPLY**
  Ex Works A-1 Fence, 6 - 8 Weeks after receipt of PO and advance payment

- **PACKING & FORWARDING**
  Standard packaging included.If you require any different packing packing method then charges will be extra

- **FREIGHT & UNLOADING**
  Freight can be arranged by A-1 Fence and billed to the Client at actuals. Unloading of the consignment will be in Client's scope

- **CHANGE OF SPECIFICATION**
  Any change in technical specification, as the case may be, might attract price revision & also revision in delivery schedule.

- **MATERIAL RECEIVED RECEIPT**
  Customer needs to sign the LR, Invoice and Packing list for the material received at site, any short material claim afterwards won't be accepted without above signed documents

- **PRODUCT FINISH**
  Fence shall be Powder coated with a minimum thickness of 65 microns with 1000 hrs of Salt spray tested. Finish color shall be Moss Green (RAL 6005)

- **WARRANTY**
  1 Year warranty against any kind of manufacturing defects from the date of Invoice.

- **OFFER VALIDITY**
  7 days from the date of this offer.