# WILO Mather and Platt Pumps Pvt. Ltd

NIHVA TECHNOLOGIES PVT. LTD.

## Technical DataSheet

| | | | |
|---|---|---|---|
| Customer | John Deere India Pvt Ltd | Consultant | - |
| Project | - | Application | - |
| Pump Model | NL 50-160 | Reference Curve | NL 50-160_50_2_A_R01 |

| Speed | Frequency | Duty Point : | | Suction : | Discharge : |
|---|---|---|---|---|---|
| 2885 RPM | 50 Hz | Q = 50.0 m3/hr | H = 35.0 m | 65 mm | 50 mm |

## Operating Conditions

| | | | |
|---|---|---|---|
| Capacity | 50.0 m3/hr | Fluid | Water |
| Head | 35.0 m | Specific Gravity | 1 |
| NPSHA | - | Temperature | - |
| Suction Pressure | 1 bar | Viscosity | |
| System / Pump in System | Standalone / 1 | Solid Size | - |
| Total QTY | 1 | Frequency | 50 Hz |

## Performance Data @DP

| | | | |
|---|---|---|---|
| Efficiency | 71.43 % | NPSHR | 2.05 m |
| Input | 6.67 kW | Shut Off Head | 37 m |
| Max. Power | 7.98 kW | Stage | 1 |
| Speed | 2885 RPM | Impeller Dia (Approx) | 164 mm |
| Max allowable soft solid size | 15 mm | Pump Performance Std | ISO-9906-Gr2B |

## Constructional Features

| | |
|---|---|
| Type of Pump | End Suction |
| Mounting | Horizontal |
| Impeller Type | Closed |
| Bearing (DE/NDE) | 6306 2Z / 6306 2Z |
| Bearing Lubrication | Grease |
| Rotation (from coupling End) | CW |
| Recommended Power (Pole) | 7.5 kW (2) |
| Shaft Sealing | Mechanical |
| Flange Type | DIN 2501 PN16 FF |
| | |

## MOC

| Item Description | Specification |
|---|---|
| Casing | C.I. (IS:210 Gr FG260) |
| Impeller | LTB2 (IS:318, Gr LTB2) |
| Shaft | SS 420 (ASTM 2001 A 276 Gr. 420) |

Notes :

1.Suction Pressure more than Vapour Pressure of fluid.
2.NPSHA>NPSHR by atleast 0.5m
3.NPSHR at impleller CenterLine / Inlet.
4.Fluid is not aggressive towards pump components chemically / physically.


Technical matter is subjected to change without prior notice due to intensive Research & Development activities

# WILO Mather and Platt Pumps Pvt. Ltd

## Performance Chart

NIHVA TECHNOLOGIES PVT. LTD.

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Customer | John Deere India Pvt Ltd | | | | | | | Liquid | Water | |
| Consultant | - | | | | | | | Specific Gravity | 1 | |
| Project | - | | | | | | | | | |
| Application | - | | | | | | | | | |
| Speed | Frequency | Pump Model | **NL 50-160** | | | | | Solid Size | 15 | mm |
| **2885 RPM** | **50 Hz** | Flow | **50.0 m3/hr** | Head | **35.0 m** | Stage | **1** | | | |

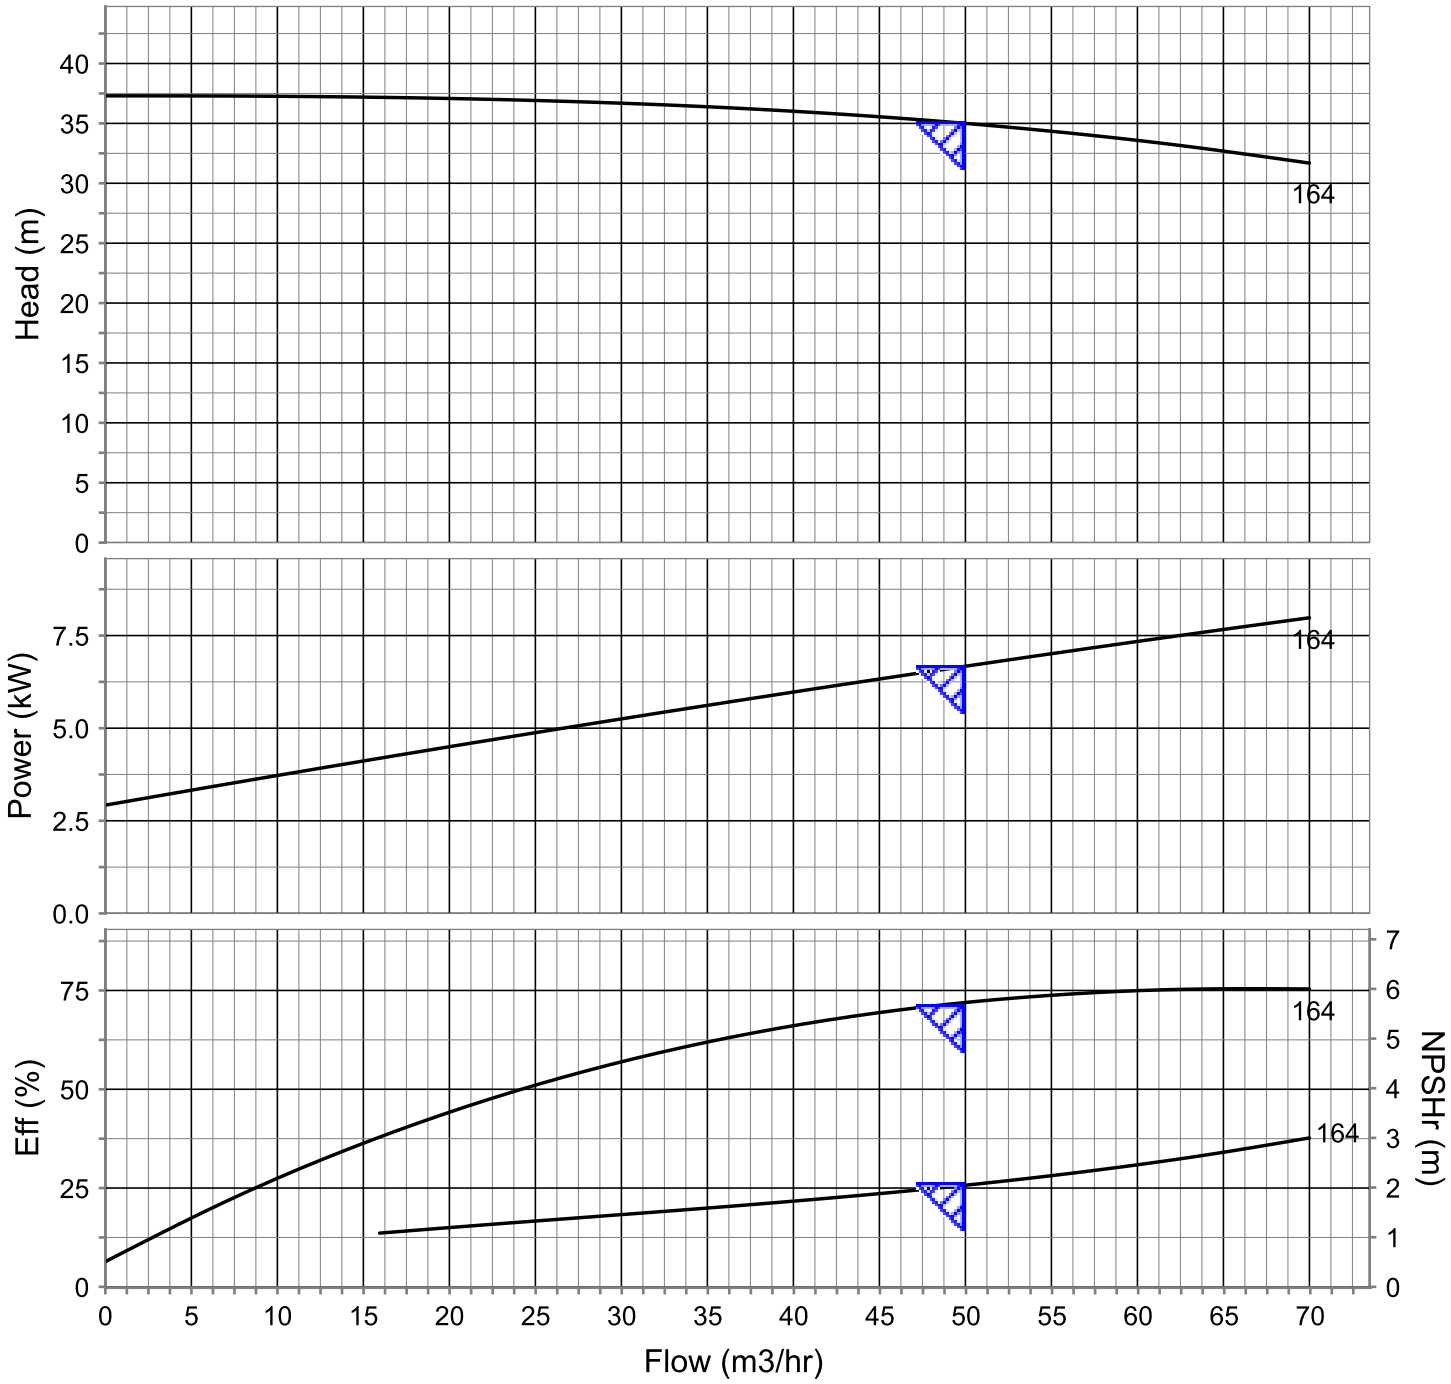


| | | | | | | |
|---|---|---|---|---|---|---|
| Input | 6.67 kW | NPSHA | - | Size | Pump Nozzle | Recommended |
| PrimeMover Power | 7.5 kW | NPSHR | 2.05 m | Suction (mm) | 65 | 100 |
| Eff | 71.43 % | Shut Off Head | 37 m | Discharge (mm) | 50 | 65 |

**Note :** 1.Pump Performance with ISO-9906-Gr2B 2. NPSHa should be at least 0.5 m higher than NPSHr

Technical matter is subjected to change without prior notice due to intensive Research & Development activities

Reference: NL 50-160_50_2_A_R01