ASSA ABLOY Entrance Systems

ASSA ABLOY

High Performance Door Solutions













The invention

- Discovery of ingenious use for the fabrics manufactured
- World’s first high-speed fabric roll up door in 1968
- Design of a door with fabric door blade that would rapidly roll up and down quickly to seal the door’s opening
- Unique counterbalance system kept the door closed tight and made for remarkably smooth operation
- New industry was born producing doors that could open and close faster than any other industrial-use door in history

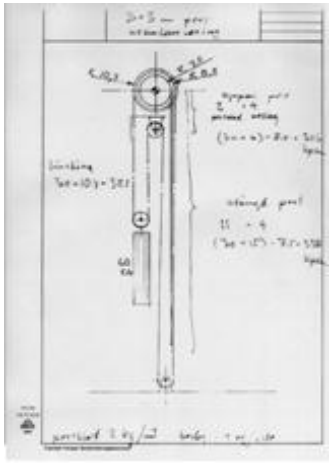

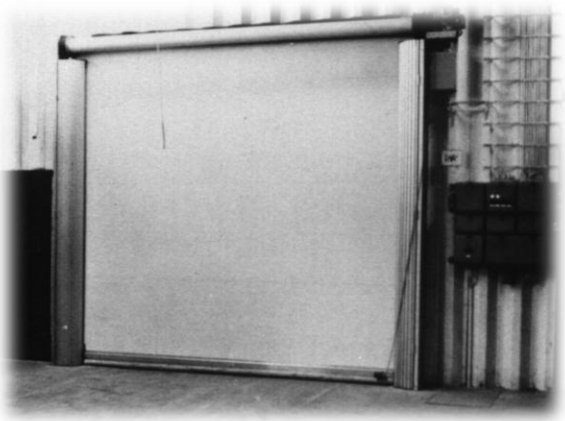

High Performance Door Segments

High-speed Building doors

- Metal, Fabric and Rubber Doors
- Rigid or flexible curtains
- Ideal for high-traffic areas
- Interior and exterior applications
- Fast opening speeds and advanced safety system

Benefits und savings of High Speed Doors

Protection against weather and environmental impacts



Wind



Rain





Extreme temperatures



Dust/dirt

Rigid Doors

RR3000 Series



RR3000 ISO with high insulation



High Performance exterior doors designed with solid (rigid) curtains for security, insulation and maximum speeds and cycles.

- The rigid curtain brings high resistance, dimension stability and sound reduction
- Extremely fast (MCC- controlled), safe, low maintenance and high durability
- Touchless winding of the lamellas (smooth movement and low wear and tear)





Winding Technology


RR3000 ISO

Feature: V-Drive

- No hinges, rollers or wheels
- Contact-free winding of the lamellas (scratch-free surface), long maintenance intervals
- No friction => less wear = high durability
- V-Drive Concept: Each lath has an adapter on each end with a “V” dampener. The adapter rolls up and sits frictionless on the disc or the previous adapter.



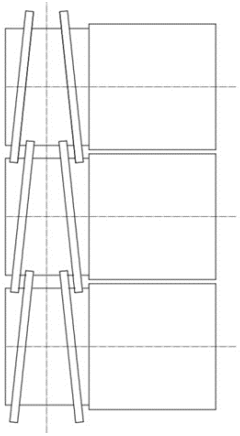

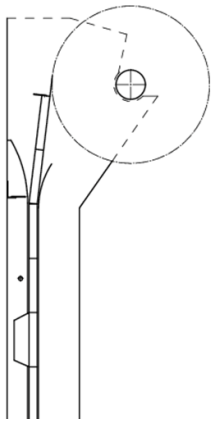



Product Description RR 3000 Series

- External Door System with solid curtain for maximum security on outside openings or as a solid barrier between factory areas. Curtain available with insulation to prevent energy loss on external openings or without for internal applications.

- Maximum wind resistance achieved by means of a solid curtain which can be equipped with windows for visibility.

- V-Drive technology wear free winding technnology allows the curtain to wind up without the laths touching each other, lessoning running noise and friction and keeping consumables to a minimum.

- Touchless safety system monitors the door's closing along the whole height of the door reverses the door movement when it senses an object in the line of closing.

Equipment / Advantages:

- **V-Drive Technology** still offers Contact-free winding of the lamellas (scratch-free surface, long maintenance intervals and high durability)
- Excellent insulation values paired with speed and product longevity.
- More sustainable than a 2 doors solution, only 1 door must be serviced, less parts, less waste.
- AS with all RR3000 Series doors,
  less moving parts = less wear.
- High opening speed up to 2.1 m/s at up to 4 openings per minute
- Quiet, fast and large up to 7 x 6 meter
- Easy to replace sandwich-lamellas separate at the belt
- Almost the whole door can be equipped with double pane window laths for high visibility and good insulation values.
- **Light Curtain Technology** as a touchless safety device.

Product Design

RR3000 ISO

Application:

- WC 2 - 3
- Exterior openings where good insulation and high performance (high speeds and durability) are needed.
- Alternative to a 2 door (day / night) solution
- Large external openings.



France



JLR - UK



United Kingdom – Manufacturing Plant



Activators



Push buttons

Radio transmitters









Radar motion detector



Key switch



Loop detectors



Infrared detector



Light curtain



Laser scanner



Combi radar




Pull switch



"Magic switch"


More on request

Signals

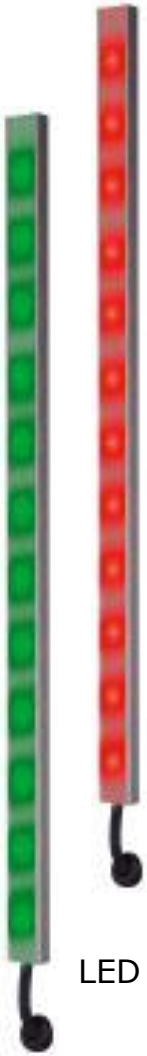

LED strips



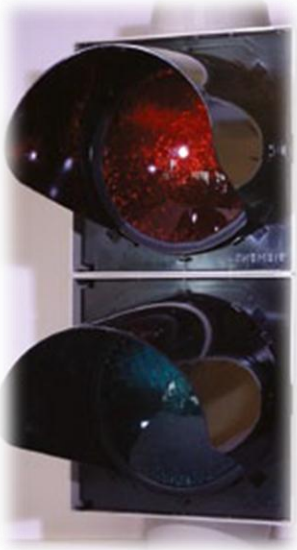

Traffic lights





Flash lights



Special lights



More on request


www.assaabloy.com