TECHNOSYS EQUIPMENTS

Your Business Partner for Material Movement & Storage

ELECTRIC PALLET TRUCK





: Note :
Customization on request



ELECTRIC PALLET TRUCK

KEY FEATURES

✧ Electric Pallet Truck is a compact truck with the loading capacity of 2,500 To 15,000kg, appropriate for work of medium and high intensity in various industries. It can provide secure and easy horizontal pallet movement.
✧ It can work individually or in conjunction with a platform. But for long-distance material transport, has an optimum length, which provides easy control and excellent fork-tip visibility as well as ensure the operator a secure distance from the truck.

SAFETY


✧ Emergency reversing device in the handle provides improved operating safety.
✧ Braking applied with handle upright and horizontal position, increasing the safety of the truck.

COMFORT

✧ Tiller head designed for maximum operator comfort & user friendly.
✧ Controls positioned to allow operation with either hand.

PERFORMANCE


- ✧ Equipped with Brush-less drive motor
- ✧ Contact-less switches ensure low maintenance & positive feedback
- ✧ Heavy Duty traction battery
- ✧ 2.2Kw Heavy duty Hydraulic system
- ✧ Vertical driving system
- ✧ Battery side extraction: Battery can be removed from the side, making it very convenient to replace and maintain batteries.
- ✧ Emergency power disconnect switch.
- ✧ Built-in pressure relief valve protects the trucks from overloads, increases the reliability.
- ✧ Tandem PU Load wheel to ensure smooth movement
- ✧ Spring loaded floating Gear box



FLOATING STRUCTURE



CONTACT LESS SWITCHES ENSURE LOW MAINTENANCE & POSITIVE FEEDBACK



EASY TO MAINTAIN



MULTIFUNCTION CONTROL HANDLE



BATTERY CHARGING TROLLEY



TWIN LIFTING CYLINDER



GAS SPRING LOADED PLATFORM





ELECTRIC PALLET TRUCK

TECHNICAL SPECIFICATION

IDENTIFICATIONS					
Model		TBP15	TBP25	TBP30	TBP50
Power supply		Electric			
Operating type		Walki	Stand-On Platform		
Load capacity	Q Kg	1500	2500	3000	5000
Load centre distance	C mm	600			
WHEEL					
Tyres		Polyurethane	Polyurethane	Polyurethane	Polyurethane
Tyre size drive end	mm	Φ230x70	Φ230x70		Φ254X100
Type size load end	mm	Φ83x70	Φ83x70		Φ83x70
Balancing wheel size	mm	Φ100x50	Φ125x60		Φ125x60
DIMENSIONS					
Lift height	mm	201			
Forks height, lowered	mm	90			
Height of handle in drive position (Max/Min)	A3 mm	1450			
Overall length	A1 mm	1650	1910		2100
Length to face of forks	A2 mm	550	760		950
Overall width	mm	760	830		
Fork dimensions	l X w X h mm	1100 X 160	1150 X 180		1150 x 200
Width Over Fork	Wof / mm	550 / 685			
Minimum ground clearance	D1 mm	25 / 30			
Aisle width for pallet 800X1200 lengthways	Astmm	1950	2340		
Turning radius	C1 TR / mm	1450	1750		
PERFORMANCE					
Travel speed loaded/unloaded	km/h	4 / 4.5	4.5 / 5		
Lift speed loaded/unloaded	m/sec	0.017 / 0.024	0.04 / 0.05		
Lowering speed loaded/unloaded	m/sec	0.09 / 0.06	0.05 / 0.04		
Max gradeability loaded/unloaded		1:20			
Service brake		Electromagnetic			
ELECTRIC MOTOR					
Drive motor rating / Brushless	kW	1	1.5		2.5
Electronic Power Steering Motor (Optional)	Watt	300			
Lift motor rating	kW	0.8	2.2		
Battery voltage / nominal capacity	V/Ah	24 / 80 / 24/165 / 24/210 / 24/280 / 24/330			
OTHERS					
Type of drive control		Step - less			
Reverse Horn		Yes			

DIMENSIONS

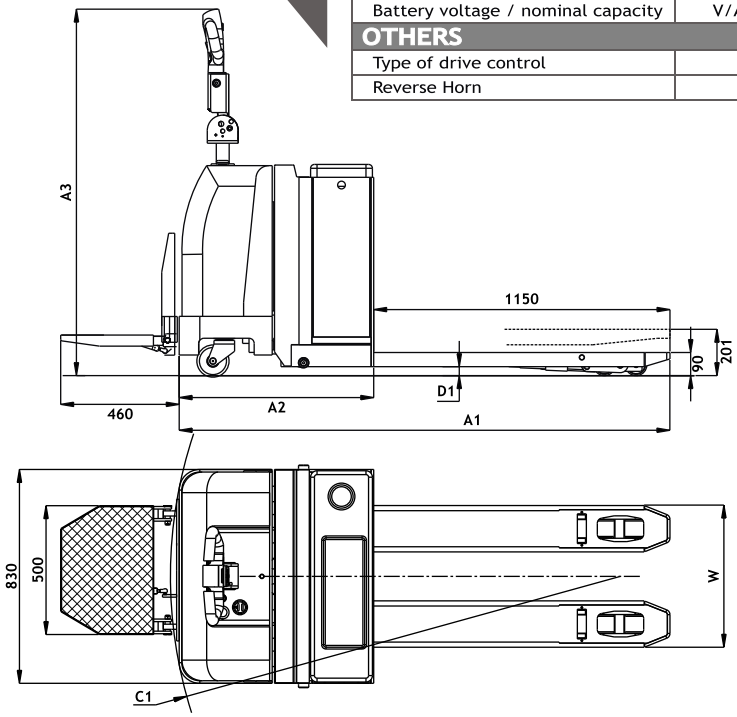

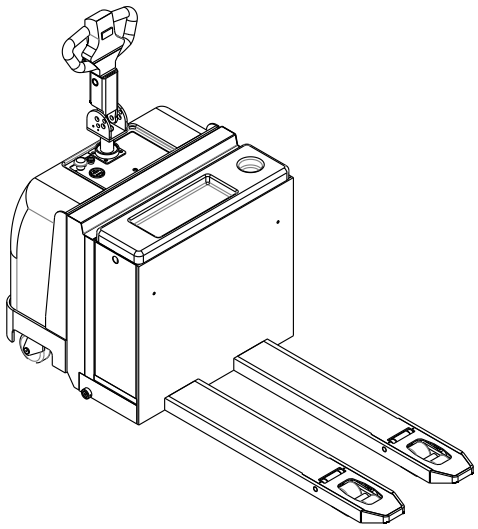

Technosys Equipments Pvt. Ltd.

GSTIN No. : 27AAFCT0213J1ZK

Plot No. 144, Sector No. 10, PCNTDA, Near Vishweshwar Chowk, Bhosari, Pune - 411 026. Maharashtra, INDIA.

Office No.: +91 9922 96 8480 Customer Care No. +91 8805 888 333. Web - www.technolift.in



Edition 2021

