

Abbrevation's:
WOW-Wall Opening Width
FW-Frame Width
SW-Shutter Width
WOH-Wall Opening Height
FH-Frame Height
SH-Shutter Height
UC-Under Cut
FFL-Finished Floor Level

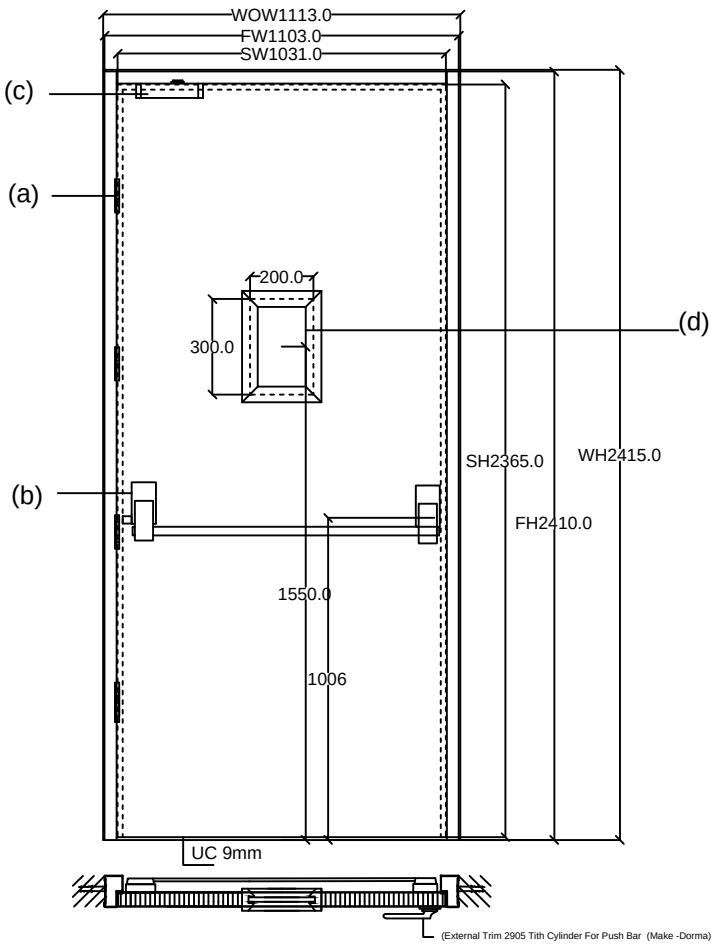

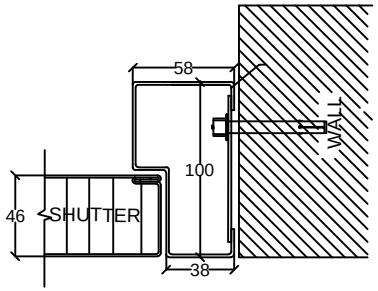

ASSESORIES DETALES

(a) HINGES: Dorma Hinges -4x3x3 4nos.

(b) LOCK : PHCR 1000 series puch bar (Make Dorma)

(c) DOOR CLOSER: 1 No. Door Colser TS 68

(d) GLASS : 1No. Clear fire Vision Glass Clear 6mm of size 200x300mm.

Shutter thickness : 46 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

TOTAL QUANTITY:- 17Nos.
DOOR DIMENSIONS-1113mm(w)x 2415mm(H)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	ABHIJIT	17/12/15	
CHECK	ANIL	17/12/15	
REV.	00		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - INDOSPACE
PROJECT -
SITE -
DWG. NO. - NIHVA/15-16/172
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com