CAPACITY/DOOR :	150 kg
TRACK :	5040
MOTION :	STRAIGHT

- Easy and long-lasting running
- **Stable system :** the hangers are designed to be constantly in contact with the track
- **All hangers** are electrolytically treated
- A complete range of hangers : straight or with swan-neck, with 2 wheels mounted on roller cages or 4 wheels mounted on ball bearings. Steel or Delrin wheels
- For special mounting : the fixing bolt is 70 mm longer than the normal version (L version)

TRACKS

Item Nr	Description	Pack.
5040/400	Galvanized track 50 x 40 mm - 4 m long.	
5040/500	Ditto 5 m long.	
5040/600	Ditto 6 m long.	


5040


capacity per door

HANGERS & PLATES

251 A	150 kg	Hanger side-fixing, with 2 steel wheels mounted on roller cages.	2
251 D		Hanger side-fixing with 2 Delrin wheels mounted on roller cages.	2
255 A		Hanger top-fixing, with 2 steel wheels mounted on roller cages.	2
255 AL		Ditto with long fixing bolt (118 mm).	2
255 D		Hanger top fixing with fixing bolt and 2 Delrin wheels mounted on roller cages	2
255 DL		Ditto with long fixing bolt (118 mm).	2
2252		Hanger with swan-neck, with 4 steel wheels mounted on ball bearings.	2
2255		Hanger, top fixing, with 4 steel wheels mounted on ball bearings.	2
2255 L		Ditto with long fixing bolt (118 mm).	2
55		Welding type plate	
56		Screwing type plate for top fixing, Ø M 12.	10
56 W		Screwing «U» plate, for top fixing, Ø M 12.	10
51		Adjustable apron set for panels from 40 to 50 mm thickness Capacity : 75 kg. Top fixing, screwing type	16



255


2252


2255


251


51



55



56



56 W

GUIDES


1110/400	U-profile 30 x 30 mm, galvanized. 4 m long	4
1110/500	Ditto 5 m long	4
1110/600	Ditto 6 m long	4
1099	Bottom guide with olive on a round ended screwing plate, for U-profile 30 x 30 mm See dimensions and mounting instructions p. 61	10


1099



1110

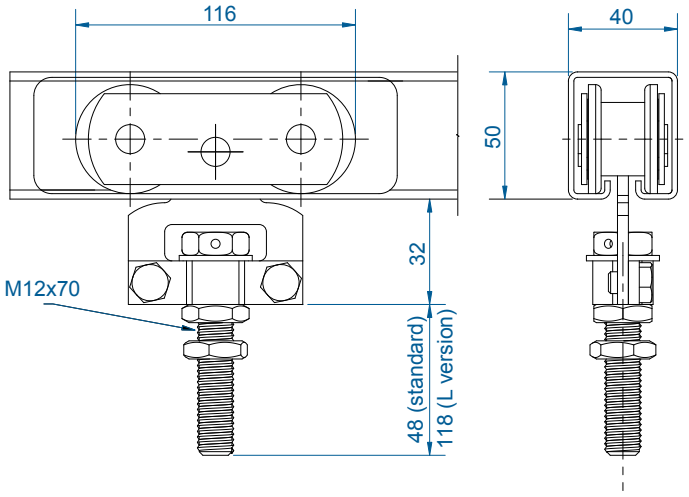


Hangers 255 A & 255 D - 255 AL & 255 DL

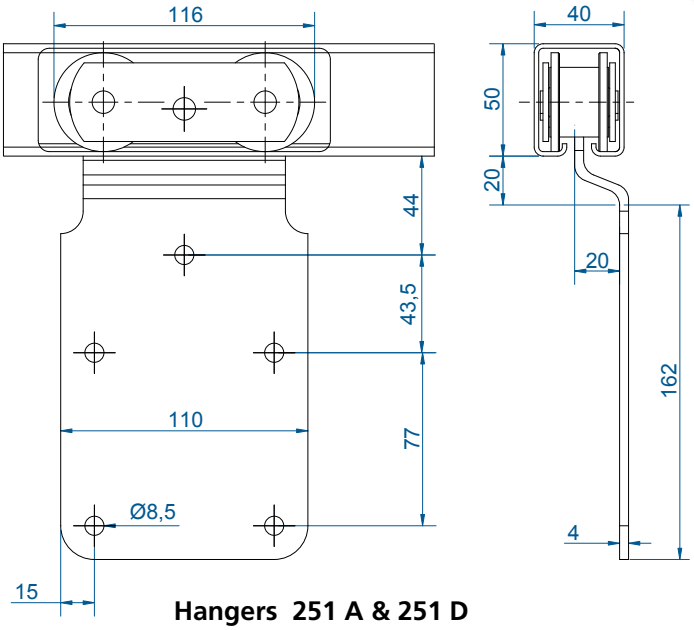

Hangers 251 A & 251 D

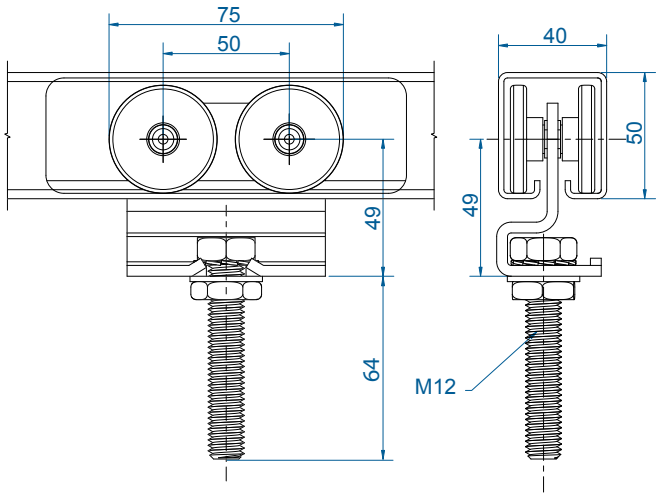

Hanger 2252

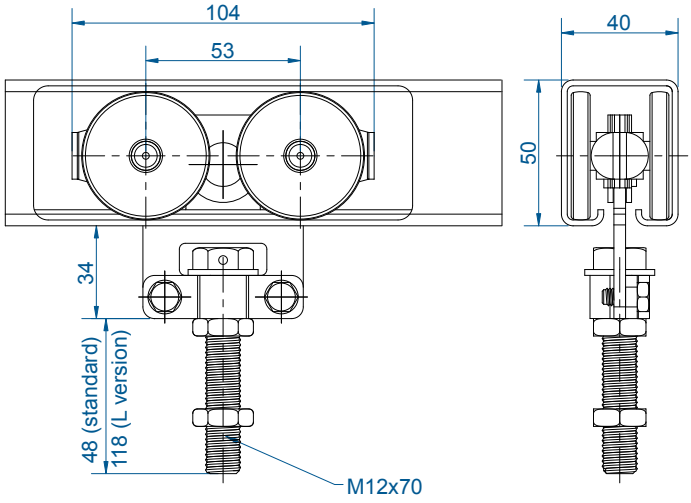

Hanger 2255 & 2255 L

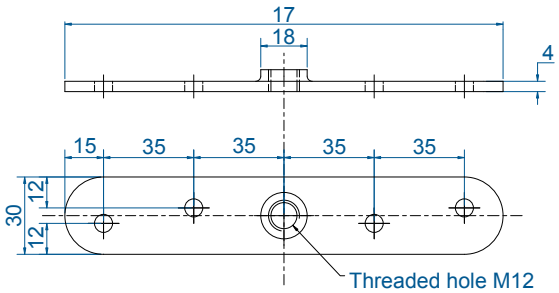


Plate 56

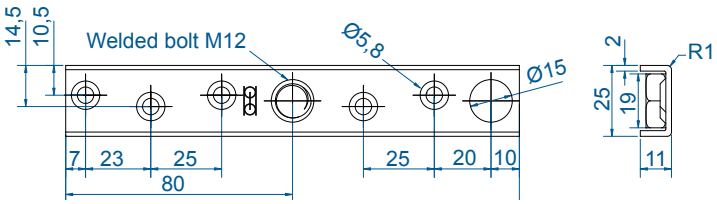


Plate 56 W


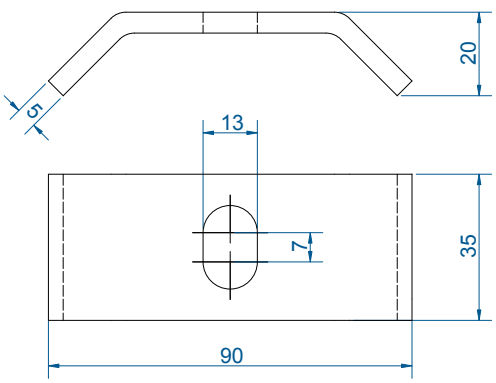


Plate 55

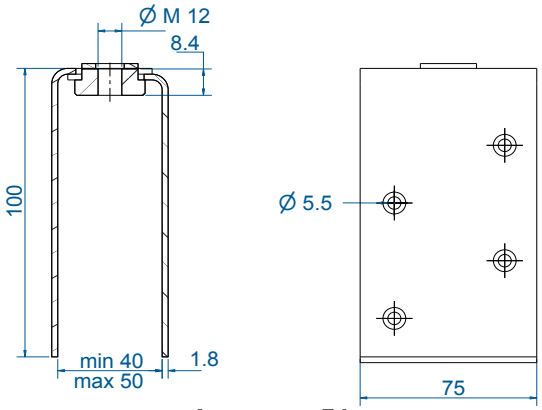

Apron set 51