
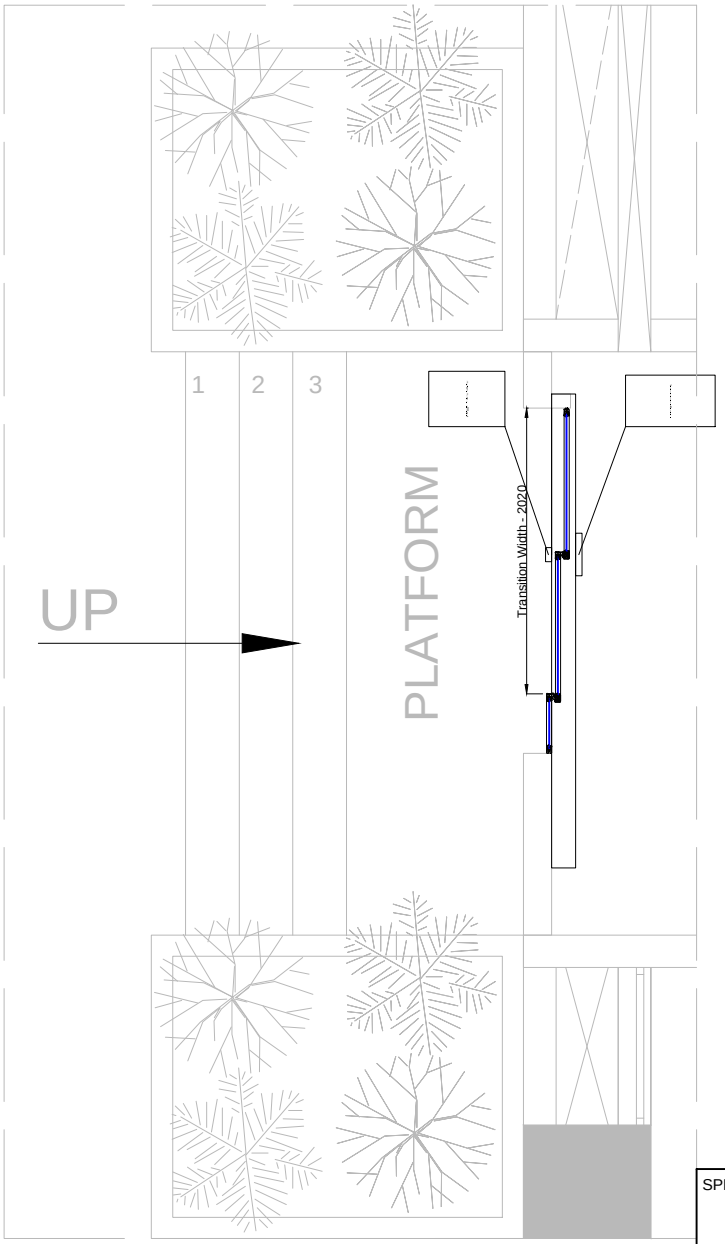


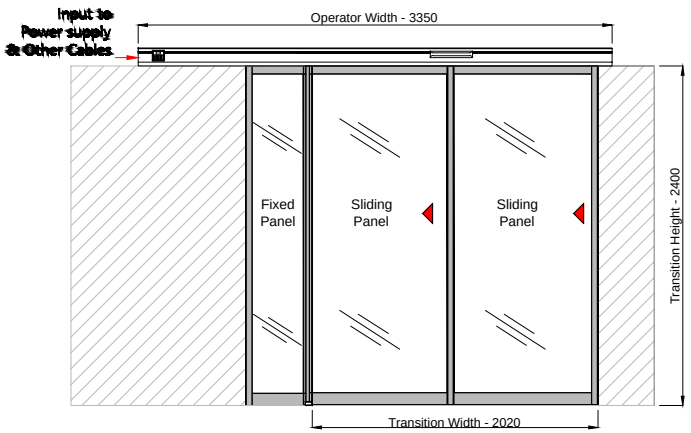

NOTES -

1. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY YOU FOR SAFE STORAGE UNTIL INSTALLATION.
2. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE -NIHVA WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
3. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR IN CLIENT SCOPE.
4. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY CLIENT.
5. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, FLOORING, ETC. IS IN CLIENT SCOPE.

SPECIFICATIONS
(1) Power - 170-260 V AC 50-60 Hz
(2) Weight Carrying capacity - 170kgs for Single leaf, 240kgs for Double leaf.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: AUTOMATIC TELESCOPIC GLASS DOOR			NIHVA TECHNOLOGIES PVT. LTD. / NIHVA TECHNOLOGY PVT. LTD. PUNE
		SIGN	DATE
DRAWN	SIDDHESHWAR		5.11.2020
CHECK	ARJUN		5.11.2020
APPRD.			
ALL DIMENSION ARE IN mm			
If any queries contact :-projectsupport@nihva.com			

Website:- www.nihva.com
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - SERUM INSTITUTE PUNE		
PROJECT - SERUM INSTITUTE PUNE		
SITE - PUNE		
DWG. NO.-NIHVA/20-21/0079		REV.- 0
SCALE: 01	WT:	SHEET: 01 OF 01