
Preventive Maintenance

Leveler sealing

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

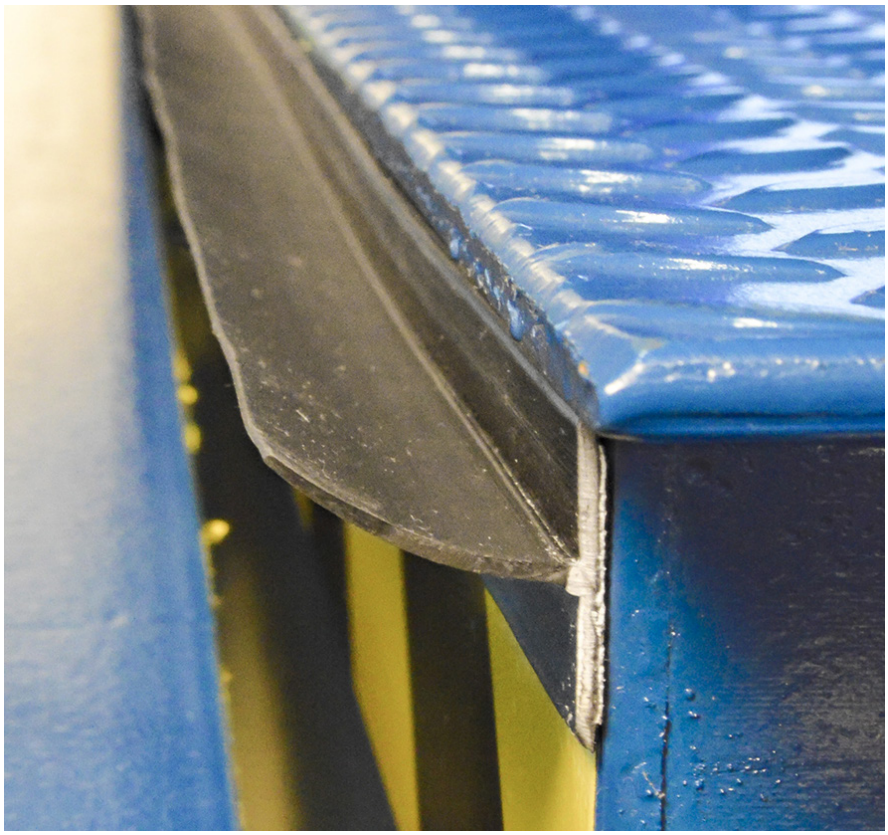

The leveler sealing keeps draft and dirt outside

Function
Leveler sealings are installed at both sides and at the rear of the leveller platform. The leveler sealings reduce draft coming from below the leveller into the building. It also prevents insects, dust and dirt entering the building.

How they wear
During the lifetime of the leveler sealings there will be wear and tear caused by:
- Friction between leveller and pit.
- Damaging by dirt between leveller and pit.

Replacing sealings earlier
Yes, Visually inspect the seals. If it shows damaging or deformation, it must be replaced. Especially the older types of sealings, installed on steel profiles can be severely damaged by the floating platform.

What is the risk of not replacing?
The leveler sealings prevent any dust and dirt gathered underneath the leveler from being blown into the building. This has a great impact on logistics environments with high demands on operational hygiene and health for working personnel.

CHANGE BEFORE IT BREAKS

Replace after

- 3 years

Key Benefits

Convenience

Sustainability

ASSA ABLOY ENTRANCE SYSTEMS
Maintenance & Modernization