
DRAWING

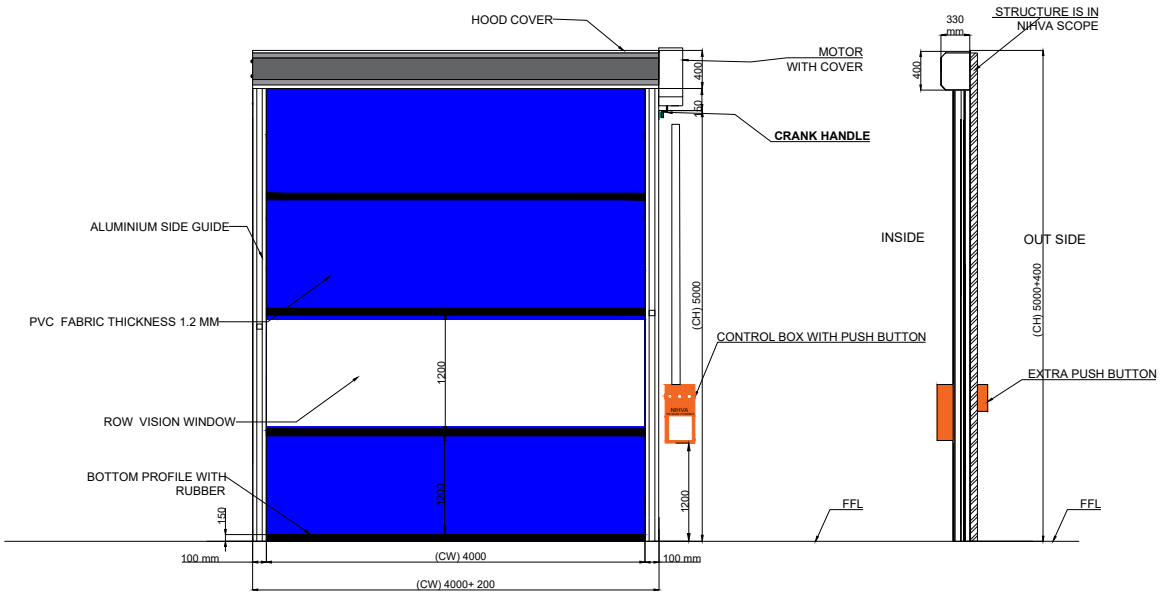

TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	MOUNTING	ON STRUCTURE: INSIDE
3	CURTAIN PANEL	PVC FABRIC THICKNESS 1.2 MM.
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 1.5M/SEC & CLOSING: 0.8 M/SEC
6	RAL CODE	BLUE
7	ACCESSORIES	1) EXTRA PUSH BUTTON 1NOS 2) PHOTOCELL - 2 PAIR 3) SAFETY EDGE SENSOR FOR BOTTOM 4) MAGNETIC LOOP DETECTOR - 2NOS 5) CONTROL PANEL WITH PUSH BUTTON-1NOS

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**4000**	**5000**	01

NOTE : All DIMENSIONS ARE IN MM.

SPECIAL INSTRUCTION'S :

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR AUTOMATION

DWG NO - NTPL-313-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	J.P.		21-11-2025
CHK'D	B.S.		21-11-2025
APPV'D	V.T.		21-11-2025

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

PRODUCT - HIGH SPEED DOOR

PROJECT NO - NTPL- 313 | REVISION - 00

SITE LOCATION - CHAKAN | WEIGHT -

MATERIAL - | QTY - 1

PROJECTION METHOD | SCALE :

SHEET 1 OF 1