**Introduction:**


The mechanism will be used to provide a bridging platform where person can move from one location to other using this bridging platform. The mechanism shall provide both horizontal and vertical movement. It will be used for persons to slide from one location to other at heights.

**Functional requirements for the Mechanism:**

| Sl. No. | Specification | Compliance (YES/NO) |
|---|---|---|
| 1 | The mechanism shall be motor operated. The operating panel shall be also provided with the mechanism. (Model for manual operated mechanism shall also be given) | |
| 2 | The mechanism shall be designed for 100-150 kg load. | |
| 3 | The deflection due to load shall be minimum/negligible. (Exact deflection shall be specified) | |
| 4 | The mechanism shall have extendable platform length of 1000mm. The total expendable length shall be 2400mm while shutoff length shall be 1400mm. | |
| 5 | The width of the mechanism shall be 400-450mm. | |
| 6 | The total weight of the mechanism shall be indicated and it shall be as minimum as possible. | |
| 7 | Minimum height of the mechanism shall be 500-600mm and it shall be able to lift the personnel by 600-700mm. | |
| 8 | Base of the mechanism shall be rigidly fixed and shall not shake during personnel movement. | |

**Note:**

1. Party shall select the nearest model matching to the given functional requirements.
2. The delivery of the item shall be within next 5 days (as early as possible).
3. Total cost of the item shall be indicated. It shall be inclusive of all costs i.e., basic supply cost, packing & forwarding cost, transportation cost and GST.
4. The item shall be delivered up to SDSC SHAR, Sriharikota.

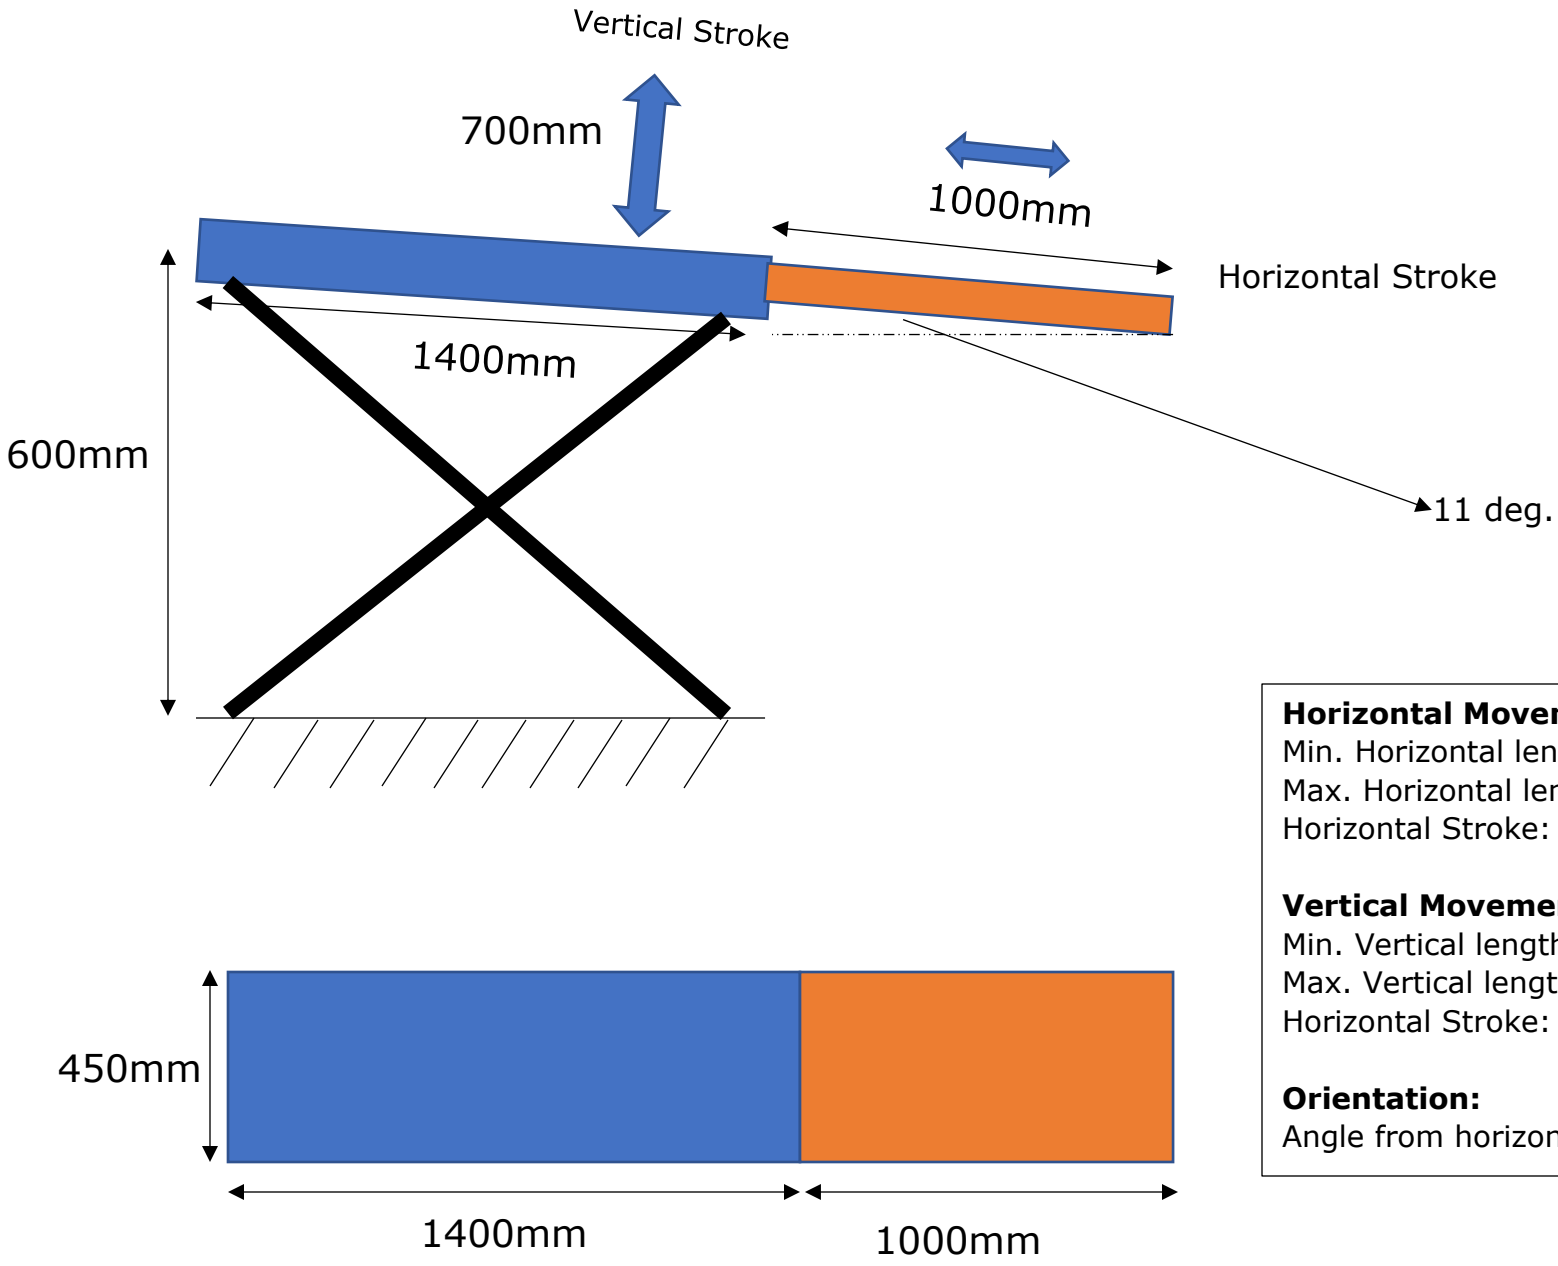


**Horizontal Movement:**
Min. Horizontal length: 1400mm
Max. Horizontal length: 2400mm
Horizontal Stroke: 1000mm

**Vertical Movement:**
Min. Vertical length: 600mm
Max. Vertical length: 1300mm
Horizontal Stroke: 700mm

**Orientation:**
Angle from horizontal plane: 11 deg.