
DRAWING

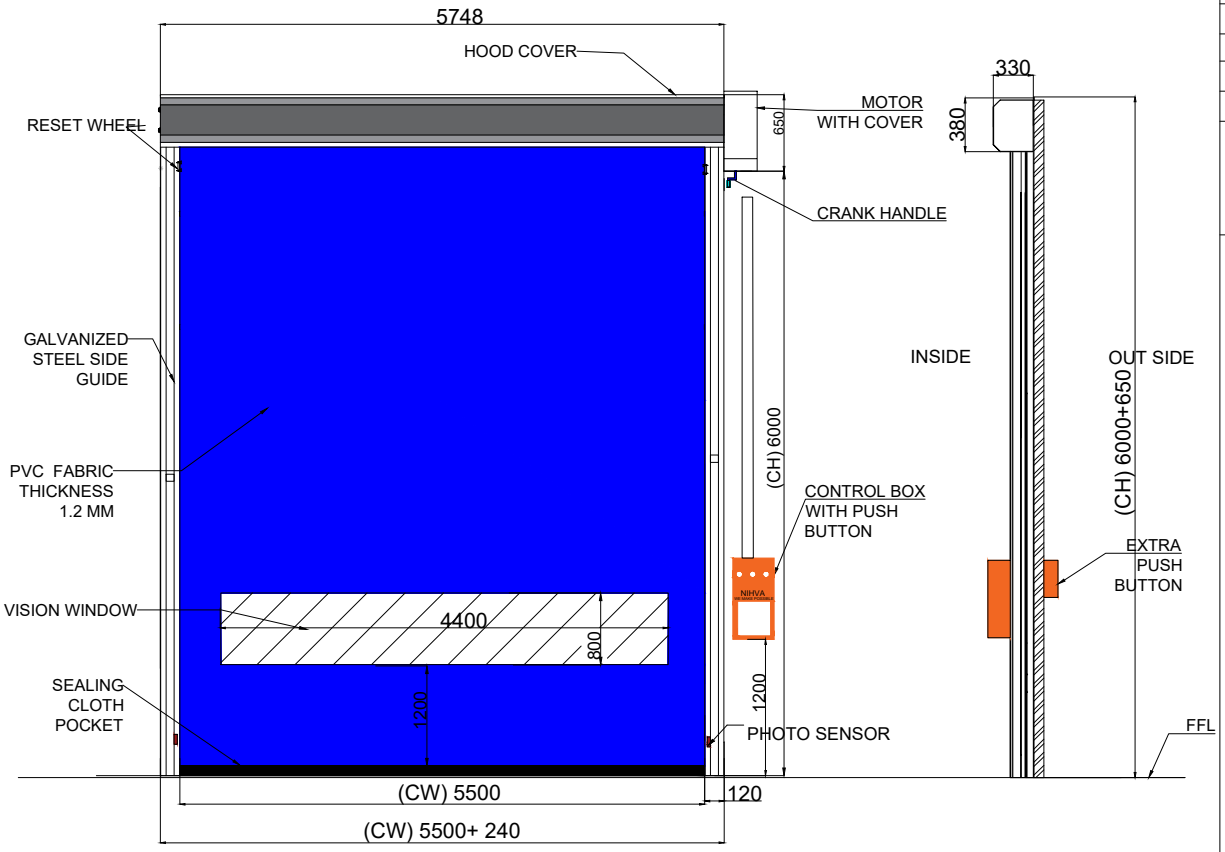

TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	GUIDE	GALVANIZEDSTEEL SELF REPAIR GUIDE WITH RESET WHEEL
3	CURTAIN PANEL	PVC FABRIC THICKNESS 1.2 MM.
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 0.6M/SEC & CLOSING: 2.0 M/SEC
6	RAL CODE	5002
7	ACCESSORIES	1) EXTRA PUSH BUTTON 1NOS 2) PHOTOCELL - 2 PAIR 3) SAFETY EDGE SENSOR FOR BOTTOM 4) MICROWAVE RADAR ON BOTH SIDES 5) CONTROL PANEL WITH PUSH BUTTON-1NOS

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	5500	6000	03

NOTE : All DIMENSIONS ARE IN MM.

SPECIAL INSTRUCTION'S :

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR AUTOMATION

DWG NO - NTPL-315-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	J.P.		25-12-2025
CHK'D	B.S.		25-12-2025
APPV'D	V.T.		25-12-2025

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

PRODUCT - SELF REPAIRABLE HIGH SPEED DOOR

PROJECT NO - NTPL- 315 | REVISION - 00

SITE LOCATION - THANE | WEIGHT - 390 KG

MATERIAL - AL+G.I | QTY - 1

PROJECTION METHOD | SCALE :

SHEET 1 OF 1