PERGOLA












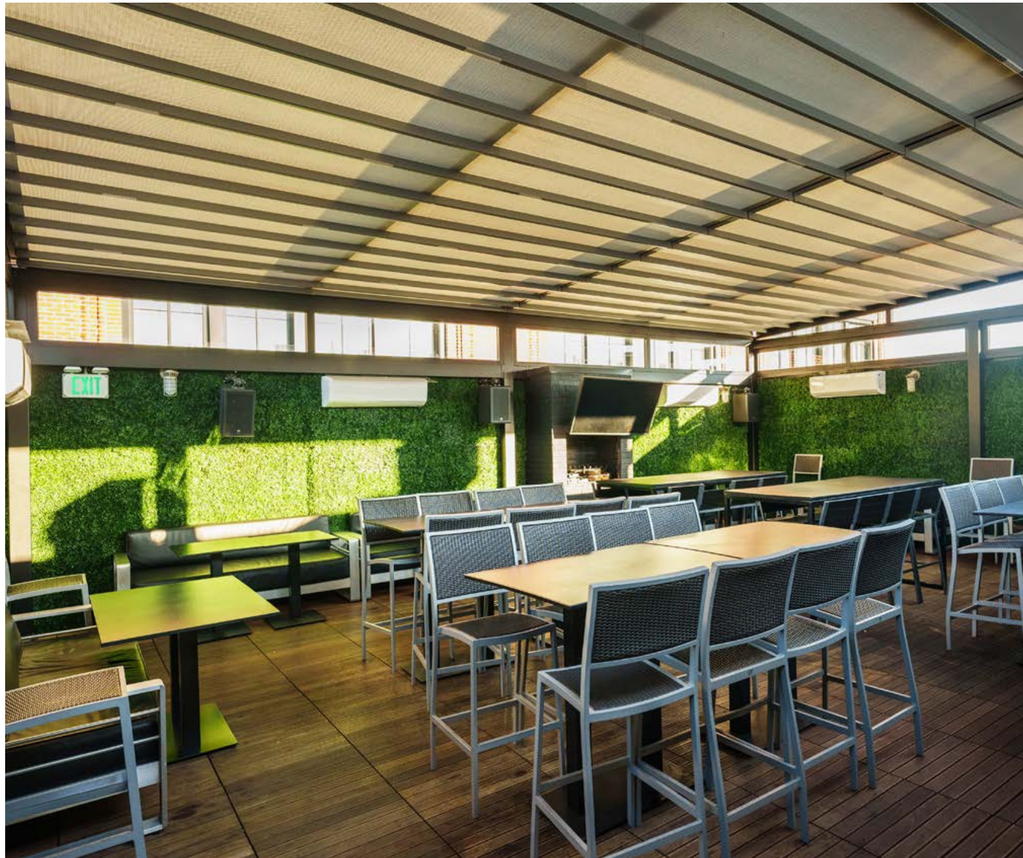



EXIT






PERGOLA

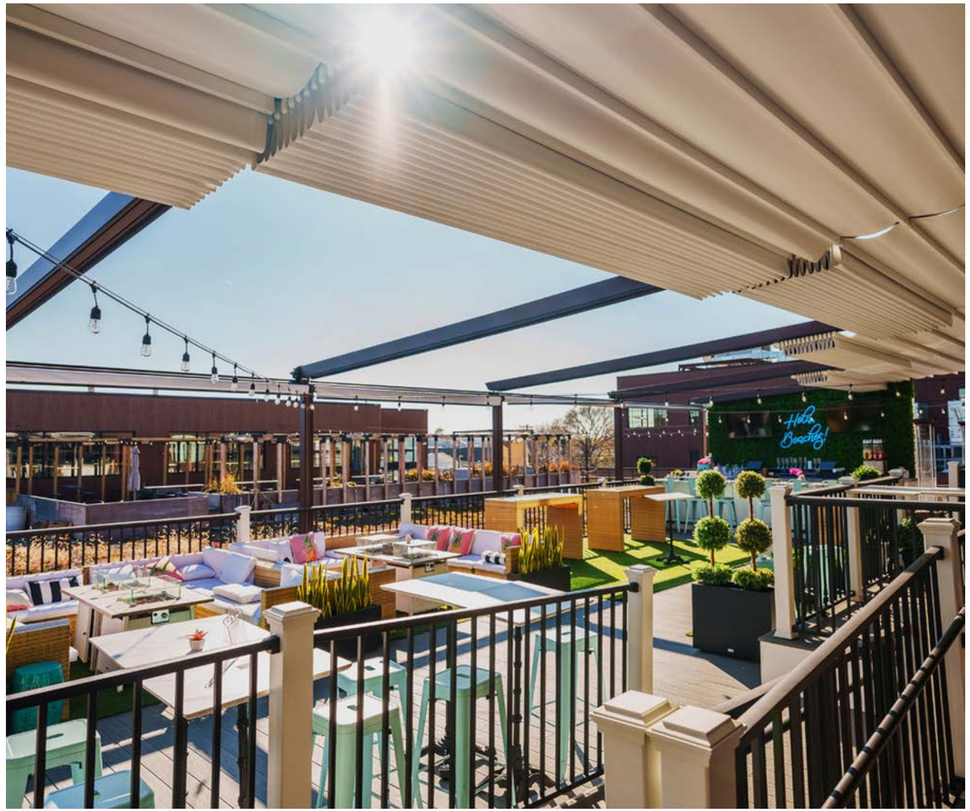





Pergola design specs

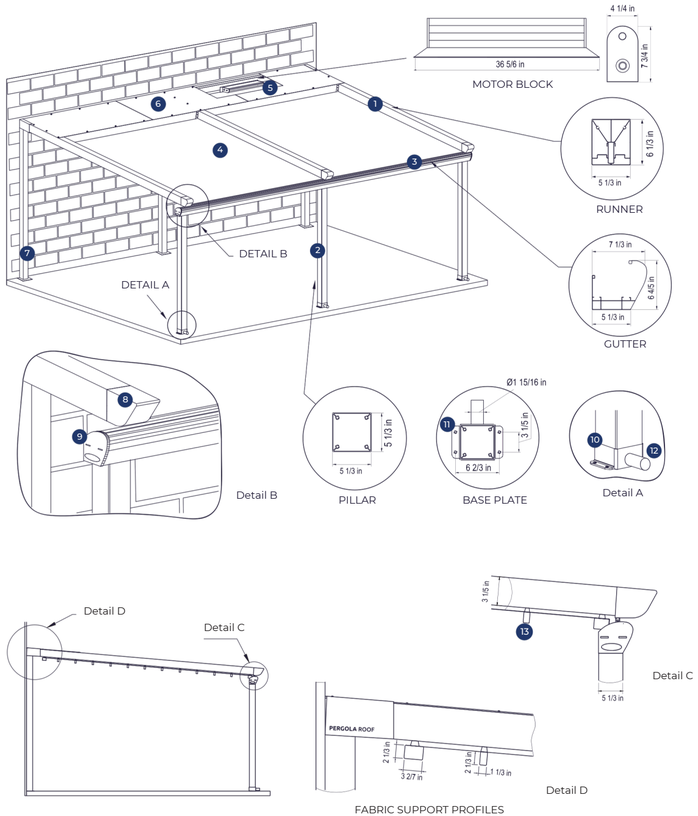

1 Unibody aluminum press casting runner beam

2 Aluminum column (3 mm thick)

3 Double-skinned aluminum stream gutter

4 Fire retardant and waterproof retractable ceiling fabric with 3 layered complete blackout by Sergi Ferrari

5 The opening / closing movement of the roof cover is motorized with remote control by Somfy

6 Motor and fabric cover panel

7 Rear legs may be eliminated when directly installed to the wall

8 Die cast aluminum beam end cap

9 Plastic injected stream gutter side cap

10 Aluminum die casting attachment flange

11 M18 hex nut

12 Water dissent

13 Rail profile with integrated LED lighting

MOTOR

Altus® is suitable for pre- and post-construction opportunities and can be controlled with any Radio Technology Somfy accessory.

somfy	LT60 Altus RTS 6100R2
	Technical properties
Voltage supply	120V AC, 60Hz / 220V AC, 50Hz
Limit switch type	Electronic RTS (remote controlled)
Torque	100 Nm (880 in. lbs.)
Rated current	3.8A
Speed	14 rpm
Sound level	≤ 67 dBA
Temperature working range	14°F to 104°F (-10°C to 40°C)



TELIS 4 and 16 RTS
hand-held remote extends control up to 4 and 16 different channels within 65 feet of range.



DECOFLEX WIREFREE™ RTS
is battery-powered and a completely wireless wall switch.

LIGHTS

SCHILDR pergolas come with optional built-in LED spot or tube lighting

SAMSUNG	Samsung Tube LED
	Technical properties
Operating voltage	24V
Color temperature	3,000K
LED type	700 Lumen
Protection class	IP 68
Body color	Off-white
Life	50,000 Hrs
Operating temperature	-30°C to 85°C
Dimenions	180 x 35 mm



Tube LED
embeded into aluminum rail profile

PHILIPS	Phillips Spot LED
	Technical properties
Operating voltage	90-265V AC 50-60Hz
Color temperature	3,000K
LED type	Phillips Lumileds Luxeon K2
Protection class	IP 68
Body color	Off-white
Life	50,000 Hrs
Operating temperature	-30°C to 85°C
Weight and Dimenions	190 gr, 58 x 108 mm



Spot LED
on aluminum rail profile